

PRODUCT CATALOGUE 2022/2023



















Introducing The World of Bona

•

Introduction

Our History and Milestones Passion for Wood Floors Bona Technical Support	4 5 6
Adhesives	
Introduction to Bona Adhesives Damp Proof Membranes/Moisture Barriers Primers/Levellers Specialist Adhesives Reactive Silane-Based Adhesives Tools and products for installation and repair Bona Adhesives Specification Guide	8 9 10 11 12 14 15
Abrasives	
Introduction to Bona Abrasives Ceramic Abrasives Zirconium Mix Abrasives Silicon Carbide Abrasives Aluminium Oxide Abrasives Specialist Abrasives Screens/Cleaning Pads Recommended Sanding Methods	16 17 20 22 24 26 27 28
Coatings	
Introduction to Bona Coatings Primers Lacquers Bona Lacquers – Durability Scale Bona SuperSport Oils Fillers Tools for use with Coatings	30 31 33 37 38 42 48 50
Floor Care	
Introduction to Bona Floor Care Deep Clean System Commercial Cleaners for Lacquered Floors Commercial Cleaners for Oiled Floors Retail Cleaning Products	54 55 56 57 58
Sanding Machines	
Introduction to Bona Sanding Machines Bona Belt and Expansion Sanders Bona Sanders Bona FlexiSand System Introduction to Bona Brush Technology Other Machines & Accessories Bona Vacuums Bona Dust Bags Bona Resilient System	64 65 66 68 70 72 73 74 75

•



•





From coffee shop to global innovator, Bona has been family owned from the very start. Bona's founder, Wilhelm Edner, originally owned a small grocery shop in Malmö. Sweden where he sold coffee and other products including 'bonwax' (floor polish). Edner quickly realised the potential of bonwax and, in 1919, incorporated a new company - Bona AB - to develop it further. Now, more than 100 years later, Bona is a leading player in the global wood floor industry and has a wealth of knowledge focused on bringing out the beauty in floors.



Bona is still owned by the Edner family and remains committed to developing, improving and finding new innovations not just for the treatment of wood floors but also for other types of flooring such as stone, tile, laminate and resilient.

Today, Bona has 600 employees and is present in 90 countries through subsidiaries and distributors.



Milestones

1919 Bona AB is established in Malmö, Sweden

1953 Bona's first subsidiary is established in Germany

1959 Bona moves to new premises in Malmö

1979 Bona introduces waterborne coatings

1981 Bona starts producing UV-finishes

1987 A new subsidiary is established in the USA

1999 A new subsidiary is established in the UK

2000 Bona starts production of the new range of sanding machines

2000 Bona's Asia Pacific subsidiary is established in Singapore

2001 Bona becomes ISO 14001 certified

2001 Bona invests in two new plants in Sweden

2002 Bona acquires a new plant in Pueblo, USA

2004 Bona offices established in Panama and Shanghai

2005 Introduction of dust-free sanding and silane-based adhesives

2006 Opening of plant in Monroe, USA

2007 Opening of UV-coating plant in China

2008 BonaKemi becomes Bona

2008 Full range of silane-based adhesives introduced

2009 Bona stops producing solvent-based finishes in the EU

2009 Bona Novia awarded EU Flower

2010 Bona stops sales of solvent-based adhesives in the EU

2010 Bona stops sales of solvent-based floor care products

2011 Bona Limited expands into new warehouse premises in Milton Keynes

2012 Bona Traffic HD is launched – a new generation of waterborne lacquers

2013 Bona Certified Contractor Scheme launched across Europe

2014 New low VOC Oil System introduced

2014 Bona announces partnership with K & T and new sanding machine range

2015 Launch of Bronze, Silver & Gold Floor Treatment Programme

2015 Launch of Bona Rental System

2016 Launch of overcoatable Bona Craft Oil 2K

2017 Launch of Bona FlexiSand 1.9 2017 Launch of Bona Brushing System

2017 Launch of Bona Titan adhesive based on Titanium Technology

2018 Launch of 'Inspiration' floor styling concept

2018 Launch of Bona Mega One lacquer

2018 Launch of Resilient Floor Care Program

2019 Bona celebrates 100 years of bringing out the beauty in floors!

2020 Introduction of ergonomic UX sanding machine range

2022 Launch of Bona Traffic HD Raw





Passion for Wood Floors

The Bona System and Lifetime Support

The Bona System contains everything needed to bring out the best in wood floors. Our product range includes abrasives, sanding machines – including a dust free sanding system, adhesives, coatings and products for the ongoing maintenance of all types of wood floor in domestic, commercial or public environments.

Together these products combine to deliver Bona's promise of 'Lifetime Support' to architects, contractors and floor owners throughout the lifetime of the floor.



Low VOC Formulations

(

Since 1997, the Association for the Control of Emissions in Products for Floor Installation, Adhesives and Building Materials (GEV) certifies low-emission construction products with the quality mark GEV EMICODE®. Bona lacquers were the first in the industry to be awarded the EMICODE EC1 trademark. Bona's reactive adhesives also carry this important classification.

All adhesives and surface treatments used in new installations in Germany have to meet the DIBt standard that governs the safety of indoor air quality. Where indicated in this brochure, Bona adhesives and coatings meet this stringent certification.

Greenguard

Our lacquers, primers and retail cleaning products are GREENGUARD certified.

The globally recognised GREENGUARD

Certification is part of UL Environment,
a business unit of UL (Underwriters Laboratories).

GREENGUARD Certification helps manufacturers create, and buyers identify, interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used.

Bona Rental System

Bona offers a range of sanding machines and abrasives for the hire industry. Please request a copy of the 'Bona Rental System' brochure to find out more.

Treatments for resilient floors

Facility managers should speak to us about our separate range of products for deep cleaning, protecting and recoating resilient floors including vinyl, PVC, linoleum and rubber. Recoating a resilient floor delivers a 50% saving against the cost of replacing with new and allows you to change the colour and add design elements.







Technical Support

For architects: Whether you are looking for extra slip-resistance in a school corridor, extreme durability for a busy airport environment or a non-reflective surface for a new home flooded with light, the Bona technical team will help you identify the correct specification.





Bona is a RIBA approved CPD provider and offers seminars on the specification of finishes for wood floors, installing wood floors using adhesives and the maintenance and recoating of resilient floors.

Bona products can be specified via NBS Source.

For contractors: During working hours technical advice is always available at the end of the telephone or we can arrange a site visit to help with tricky installations.

Technical documents

Technical and safety data sheets for all our products, together with machine manuals and application guides can be downloaded at bona.com

Samples


Wet and dry samples of our coatings are available on request. Please contact our technical department.

Training for contractors and distributors

We offer two levels of training to contractors – an in-depth two day course for experienced contractors leading to 'Bona Certified Contractor' status and a one day sanding and finishing course for those new to the industry. We also offer free product training for our distributors.





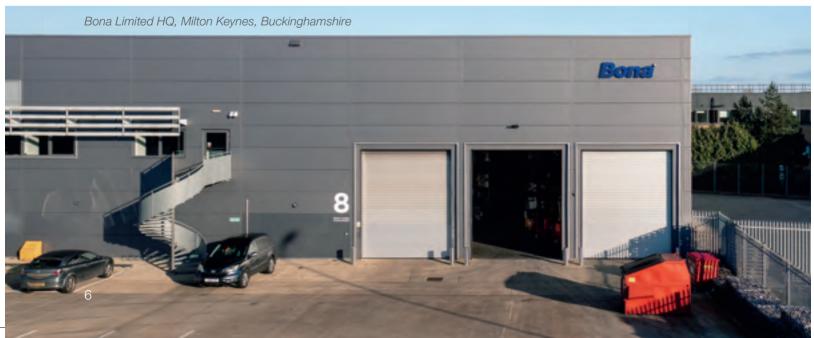



Bona is represented throughout the UK and Ireland by a network of specialist distributors. Contractors can search for local suppliers at bona.com. If you have any questions about the supply, performance or application of Bona products, please don't hesitate to call us – we're here to help you.

Technical Manager

Alec Stacey 01908 525 161 07866 719997

E-mail: alec.stacey@bona.com



Technical Assistant

Ian Smith 01908 525 162

E-mail: ian.smith@bona.com



Sales Manager - Professional Products

Tony Peak 07775 844 519

E-mail: tony.peak@bona.com

South West, South Wales, Midlands



Technical Sales

Stephen Cross 07493 868 293

E-mail: stephen.cross@bona.com

Northern England, Scotland, North Wales, Northern Ireland, Republic of Ireland



Technical Sales

(

Geoff Hewett 07792 848 315

E-mail: geoff.hewett@bona.com

London (South of Thames), South East



Technical Sales

Stuart Claxton 07377 589 431

E-mail: stuart.claxton@bona.com

London (North of Thames, East Anglia)



Resilient Sales Manager - UK & Ireland

Rohit Sharma 07775 844 581

E-mail: rohit.sharma@bona.com



Marketing Manager

Leanne Garvie 01908 525 150

E-mail: leanne.garvie@bona.com





To obtain Bona products in the Republic of Ireland, please contact Floor Design, Dublin.

Tel: 00 353 (1) 623 4157

E: sales@floordesign.ie

W: floordesign.ie



19/07/2022 09:48





Adhesives

Bona has developed a range of adhesives which delivers the right combination of strength and elasticity for all types of wood floor installation. Find out more about new Bona Quantum on pages 12 and 13, a silane based adhesive that when used at 2kg/m2 also works as a full DPM.

Technical and safety data sheets for all products are available for download at **bona.com** or speak to a member of our technical team for more information.





(



Damp proof membranes/moisture barriers

Article Number Pack Size Packs/Box



Bona R410

A solvent and water-free, two-component epoxy resin, suitable for damp proofing concrete or sand/cement subfloors (up to 90% RH), or for use as a primer prior to the application of a suitable adhesive or levelling compound. Use two coats for damp proofing and a single coat as a primer.

Key Benefits:

- Excellent damp proofing
- Excellent adhesion to most substrates
- Subfloor strengthening properties
- Can be used over a residue of bitumen

Technical Data:

Drying Time: (at 20°C/60%RH)
Allow 3 hours between coats and 24 hours before using a Bona silane adhesive
Coverage: Primer / Surface hardener:

Approx. 150-250 g/m²

Moisture Barrier: Approx. 500 g/m²

BR41002000GBBO

5 kg

1



Bona R540

A one-component, polyurethane primer and moisture suppressant for absorbent and non-absorbent substrates. Suitable for damp proofing concrete floors and substrates up to 80% RH.

Key Benefits:

- Moisture inhibiting
- Excellent penetration properties
- One-component and ready to use

Technical Data:

Drying Time: (at 20°C/60%RH) 1 hour before the installation of wood floors, 24 hours before using Bona Silane based adhesives

Coverage: Single coat application when used as a primer 100-150g/m². For multiple coats as a moisture suppressant 250-350g/m²

BR54002200M1BO 6 kg 3



Bona R590

A one-component, silane-based primer for sealing residual moisture in cement screeds or concrete (up to 90% RH) prior to installing wood flooring. Has a reinforcing effect where subfloors are slightly weak. Compatible with all Bona silane and polyurethane adhesives and Bona levelling compounds.

Key Benefits:

- Reinforcing effect
- Single coat trowel application
- Plasticiser-free
- Solvent and water-free

Technical Data:

Drying Time: (at 20°C/60%RH) 4-6 hours **Coverage:** Single coat of 500-1000g/m²

BR59002300M1BO


8 kg







Primer/Levellers

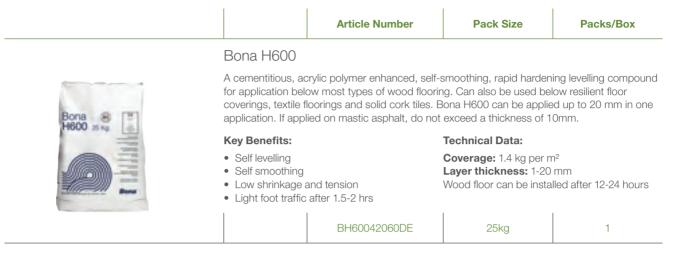



Bona D501

A primer designed for use with Silane based adhesives. It is suitable for absorbent and non-absorbent substrates (with the exception of magnesium industrial floors) and for chipboard panels and similar substrates.

Key Benefits:

- Vapour permeable
- Solvent-free
- Very quick drying

Technical Data:

Drying time: (at 20°C/60%RH) 1-2 hrs depending upon absorbency of substrate

Coverage: 100-150 g/m²

BD50102000MLBO

5 L

3



Bona D515

A one component solvent free, primer concentrate for multipurpose use. Can be used for the preparation of absorbent and non-absorbant substrates and on old, solid and water resistant adhesive residues prior to the use of Bona leveling compounds. Due to the high bonding strength Bona D515 can also be applied undiluted over dense, non absorbent and wooden substrates or old , well bonded sound floor coverings like tiles or PVC.

Key Benefits:

- Solvent Free
- Multifunction use
- Can be used undiluted or diluted.
 Check product TDS for use.
- Very Low emission EC1 Plus
- Suitable for under floor heating

Technical Data:

Drying time: 0.5 to 3 hours. On Wood or

Calcium Sulphate 24 hours **Application:** Roller or brush

Coverage: 40-150g/m2 (concentrate)

Check data sheet for more details

BD51502400MLBO

10 L







Specialist Adhesives

opeoidilot Adileoitee				
		Article Number	Pack Size	Packs/Box
	Bona D700			
	A water based, D3 adhesive designed for bonding tongue and groove joints in engineered flooring when laid as a floating system. Water resistant.			
Row	Key Benefits: Technical Data:			
	 Quick drying Long open time Moisture resista		Base: 1-comp PVAC Coverage: 5-30 g/LM	
		BD70001100GBBO	750 g	12
1.6	Bona R200			
# E E E E E E E E E E E E E E E E E E E	Liquid repair material for filling hollow spots in parquet floors as well as reattaching loose elements and boards. Once injected the material expands and effectively fills up the hollow space.			
S	Key Benefits:		Technical Data:	
9.0	Simple solutionExcellent adhesContains no wa		Base: 1-comp Polyuret Drying time: 4 hrs	hane
		BR20005900M1BO	530 g	12



(

Bona Vertical

Bona Vertical is a ready to use, fast drying, silane based construction adhesive suitable for the installation of stair nosings, skirting boards, door threshholds, carpet gripper etc. Hazard and solvent free.

Key Benefits:

- Quick grab and hardening
- High strength
- Excellent adhesion properties

Technical Data:

Base: 1-comp silane modified

Density: 1.7 g/cm³
Application: Adhesive gun

Density: 1.6 g/cm Open time: 10 min Application of load: 4-8 hrs

Curing time: 24 hrs

BRVER00300M1BO

310 ml

12



EC 1



Quantum LVT

Bona Quantum LVT is a silane-based, LVT flooring adhesive of the latest generation for the installation of a wide range of LVT floor and modular floor coverings. It is based on the Bona Quantum formulation with quadruple crosslinking technology.

Key Benefits:

- Very high initial bonding without flash-off time
- 100% solids content
- Long open time (45 mins)
- Unaffected by residual moisture in the substrate. No risk of saponification
- Very low consumption

Technical Data:

Base: Silane modified prepolymer

Density: 1.7 g/cm³ Colour: Beige

Application: Notched trowel **Open time:** 45 min **Coverage:** 180-250g/m²

BR77802400M1BO

8 kg







Adhesives

Reactive Silane-based Adhesives

Article Number Pack Size Packs/Box



Bona R848

Elastic adhesive for wood floors. A good value alternative for installing engineered flooring and smaller sized and dimensionally stable solid flooring. Relieves tension on subfloor. High initial bonding strength, reducing the potential for "hollow spots".

Key Benefits:

- Easy to spread and work with
- · Requires no primer
- Free from water and solvents, causes no wood swelling
- Allows load after 24 hrs
- Suitable for under floor heating

Technical Data:

Base: 1-comp silane modified

Density: 1.6 g/cm³ **Colour:** Beige

Application: Notched trowel **Open time:** Approx. 30 min **Coverage:** 850-1250 g/m²

BR84802800M1BO

15 kg

1



Bona R848T

Elastic adhesive for wood floors. A good value alternative for installing engineered flooring and smaller sized and dimensionally stable solid flooring. Relieves tension on subfloor. High initial bonding strength, reducing the potential for "hollow spots". Bona R848T is a thicker adhesive than Bona R848 and is ideal for gun application.

Key Benefits:


- · Requires no primer
- Free from water and solvents, causes no wood swelling
- Allows load after 24 hrs
- Suitable for under floor heating

Technical Data:

Base: 1-comp silane modified

Density: 1.6 g/cm³ **Colour:** Beige

Application: Notched trowel **Open time:** Approx. 30 min **Coverage:** 850-1250 g/m²







Bona Quantum

A new generation silane-based adhesive for all round use. Can also be used as a moisture barrier. The formula delivers outstanding strength that evolves over time to provide the ideal strength once set. Combines the benefits of hard and hard-elastic adhesives in a single product. When used as a moisture barrier Bona Quantum should be applied using Bona Trowel Plus.



Key Benefits:

- Powerful titanium crosslinking
- Floor sanding possible after 12h
- Integrated moisture barrier
- Multi-purpose
- Can be used on metal surfaces

Technical Data:

Coverage: 2000-2200 g/m² Coverage as adhesive and moisture barrier: 2.0 to 2.2 kg/m²



15 kg







(





Reactive Silane-based Adhesives

Article Number Pack Size Packs/Box



Bona Quantum T

Offering all the great benefits of Bona Quantum, but in a thicker formulation.

Key Benefits:

- Powerful Titanium crosslinking
- High viscosity
- Integrated moisture barrier
- Multi-purpose
- Can be used on metal surfaces

Tec	hnica	I Data
100	minou	. Dutu

Coverage: 850-1500 g/m² Coverage as moisture barrier:

2000-2200 g/m²



BRQUAT5601M1BO	1 kg	20
BRQUA06809M1BO	9 kg	2
BRQUAT2800M1BO	15 kg	1

Taking wood floor bonding to a new level, Bona Titan is based on Bona's revolutionary Titanium technology and quadruple crosslinking formulation that offers ultimate durability and the fastest possible bonding. Ideal for the installation of very wide or long solid planks. Its use



removes movement, providing extra security and strength. **Key Benefits:**

Bona Titan

- Ultimate durability
- Solvent-free, very low VOC
- Suitable for all wood installations
- High shear strength
- No hollow spots
- Long term stability
- Fast initial bonding and curing saves time
- No primer required
- Extremely high grab for easy application
- Suitable for underfloor heating

Applicator gun 600 ml

Base: Silane modified prepolymer

Density: 1.7 g/cm³ Colour: Beige

Application: Notched trowel Open time: Approx. 30 min Coverage: 850-1500 g/m²

15 kg



For the application of Bona R848T and Quantum T adhesives.

BRTIT02800M1BO

Manual	AT32042000	1







Tools and products for installation and repair

Туре	Article Number	Pack Size	Packs/Box
Traviala			



Trowels

For the application of Bona adhesives and moisture barriers. The 500g 180mm A3 trowel should be used for the application of Bona R590 moisture barrier.. See individual product data sheets for coverage rates. When using Bona Quantum as a moisture barrier, please apply using Bona Trowel Plus. Refer to previous page for further information.

500 g 180mm A3	AT31400280	1
850 g coarse B3	AT31402180	1
1000 g coarse B10	AT31404180	1
1250 g coarse B13	AT31406180	1
1500 g coarse B16	AT31410180	1



Bona Trowel Plus

Trowel for use with Bona Quantum and Bona Quantum T when used as a moisture barrier, allowing the application of adhesive and moisture barrier layer in the same stroke.

AT31400170	1
,	•



Oak Lamellas

Untreated white oak lamellas for making repairs. 'Nature' grade, small knots may occur.

AT32901201	1 m ²	40 pieces
------------	------------------	-----------



U300 Sound Suppressing Underlay

Sound suppressing matting made of cork and rubber granules for installation under wood, laminate and other flooring to reduce the transmission of sound from footfall. Can be fixed to the subfloor using Bona Quantum or Bona Titan. A low VOC, low flammability product.

Impact sound improvement:

 $\Delta LW = 16~\text{dB}$ with 2mm under 10mm engineered parquetry

 ΔLW = 18 dB with 2mm glued under 10mmparquetry block

 ΔLW = 18 dB with 3mm glued under 16mmparquetry block

ΔLW = 19 dB with 2mm glued under 10mmparquetry (2 layer)

2mm x 30m	AX36225002	1	1
3mm x 20m	AX36225003	1	1
5mm x 16m	AX36225002	1	1









Bona Adhesive	Typical Use
Bona R848	A high performance adhesive for the installation of engineered timber flooring. Can also be used for solid boards up to 190 mm wide.
Bona R848T	A higher viscosity version of R848 which feels thicker and has an improved initial grab that reduces the risk of hollow spots. The sausage pack offers an alternative for use in gun applicators, a longer shelf life and virtually no waste.
Bona Quantum	A true all rounder suitable for practically all types of wood flooring and subfloors. Bona Quantum can also be used as a moisture barrier on concrete slabs or cement screeds with a residual moisture content up to 5 CM -% or 95%rh. When used as a moisture barrier the product should be applied using Bona Trowel Plus.
Bona Quantum T	With a higher viscocity than Bona Quantum this formulation is optimised for application via cartridge gun or Optispread system.
Bona Titan	When you're faced with a special challenge – a unique project or a high value installation where the quality of the bond needs to be guaranteed – then it's time to turn to Bona Titan. An unbeatable bond and ideal for the installation of very wide or long, heavy boards.
Bona Vertical	Bona Vertical is a ready to use, fast drying, silane based construction adhesive suitable for the installation of stair nosings, skirting boards, door threshholds, carpet gripper etc. Hazard and solvent free.
Bona Quantum LVT	Bona Quantum LVT is a silane-based, LVT flooring adhesive of the latest generation for the installation of a wide range of LVT floor and modular floor coverings. It is based on the Bona Quantum formulation with quadruple crosslinking technology.
Bona R200	An expanding polyurethane adhesive for filling hollow spots beneath installed flooring.
Bona D700	A high performance water based (D3) adhesive for the installation of engineered flooring when laid as a 'floating' installation. Applied to the groove of the flooring, D700 is resistant to moisture and extremes of humidity.







Did you know?

- 1. Not all abrasives are the same!
- 2. Bona, in conjunction with Sia Abrasives, has developed a range of abrasives exclusively for use on wood floors.
- 3. Abrasives designed for metalworking will increase fibre tears and can cause adhesion problems if used on wood surfaces.
- 4. Choosing Bona abrasives will cut your abrasive spend, reduce time spent on site, extend the life of your sanding machines and deliver a high quality surface finish.



Ceramic 8700 Ceramic Discs/Belts
For excellent removal of hard

finishes



8600 Ceramic GreenHighly aggressive, long lasting abrasive



Discs/BeltsHighly controlled scratch pattern and reduced fibre tear

Bona 8300 Zirconium Mix



Bona 8100 Silicon Carbide Discs/Rolls

Heat resisting anti-static performance reduces clogging to a minimum



Bona 8500 Aluminium Oxide Belts

Ideal for softer timbers



Bona Diamond DiscsThe ultimate finishing system







Ceramic 8700 Platinum





Bona 8700 Ceramic Belt

Developed specifically for use on wood floors for the coarse sanding of hard lacquers like urea formaldyhyde. Optimum surface quality is achieved when used in combination with Bona Zirconium Mix antistatic abrasives. The ceramic aluminium oxide grit delivers extreme high performance and long life.

200 x 750 mm	36	AAS469500363	5
200 x 750 mm	50	AAS469500503	5
250 x 750 mm	36	AAS469600363	5
250 x 750 mm	50	AAS469600503	5



Bona 8700 Ceramic Disc

100 mm discs designed for Bona Dual Edge.

	100 mm	36	AAS472800365	25
	100 mm	50	AAS472800505	50
125 mm discs designed for Bona Multidisc.				
	125 mm	36	AAS471600365	25
	125 mm	50	AAS471600505	25

125 mm	36	AAS471600365	25
125 mm	50	AAS471600505	25
1		1	
150 mm	36	AAS471700365	25
150 mm	50	AAS471700505	25
1		1	
178 mm	36	AAS471800365	25
178 mm	50	AAS471800505	25
•			













25



178 mm

120

AAS860401206

•



•

BONA CERAMIC 8600 GREEN

Bona Ceramic 8600 Green abrasives deliver outstanding productivity!

(

(





Zirconium Mix Abrasives

Туре	Grit	Article number	Q/Box
------	------	----------------	-------



Bona 8300 Zirconium Mix Belt


Developed specifically for use on wood floors, Bona 8300 Zirconium Mix abrasives feature an anti-static, heat resistant coating that impedes clogging. The unique mix of Zirconium and Silicon Carbide – one of the world's hardest materials – deliver an abrasive that lasts up to five times longer than traditional abrasives as well as producing a very smooth surface.

200 mm x 750 mm	24	AAS467700243	10
200 mm x 750 mm	36	AAS467700363	10
200 mm x 750 mm	40	AAS467700403	10
200 mm x 750 mm	60	AAS467700603	10
200 mm x 750 mm	80	AAS467700803	10
200 mm x 750 mm	100	AAS467701003	10
250 mm x 750 mm	24	AAS467800243	10
250 mm x 750 mm	36	AAS467800363	10
250 mm x 750 mm	40	AAS467800403	10
250 mm x 750 mm	60	AAS467800603	10
250 mm x 750 mm	80	AAS467800803	10
250 mm x 750 mm	100	AAS467801003	10

Bona 8300 Zirconium Disc

Developed specifically for use on wood floors, Bona 8300 Zirconium Mix abrasives feature an anti-static, heat resistant coating that impedes clogging. The unique mix of Zirconium and Silicon Carbide – one of the world's hardest materials – deliver an abrasive that lasts up to five times longer than traditional abrasives as well as producing a very smooth surface.



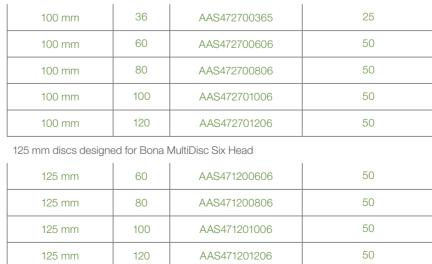







(





Zirconium Mix Abrasives

Туре	Grit	Article number	Q/Box
150 mm	24	AAS4675000245	25
150 mm	36	AAS467500365	25
150 mm	40	AAS467500406	50
150 mm	60	AAS467500606	50
150 mm	80	AAS467500806	50
150 mm	100	AAS467501006	50
150 mm	120	AAS467501206	50
Bona Discs 15 Hole			
150 mm/8 mm	24	AAS470600245	25
150 mm/8 mm	36	AAS470600365	25
150 mm/8 mm	40	AAS470600406	50
150 mm/8 mm	60	AAS470600606	50
150 mm/8 mm	80	AAS470600806	50
150 mm/8 mm	100	AAS470601006	50
150 mm/8 mm	120	AAS470601206	50
178 mm	24	AAS467400245	25
178 mm	36	AAS467400365	25
178 mm	40	AAS467400406	50
178 mm	60	AAS467400606	50
178 mm	80	AAS467400806	50
178 mm	100	AAS467401006	50
178 mm	120	AAS467401206	50







Silicon Carbide Abrasives



Bona 8100 Silicon Carbide Roll

Туре

Grit

A long lasting, durable abrasive with high heat tolerance. Grit 16-36 with cloth backing, grit 40-120 with paper backing.

Article number

Q/Box

203 mm x 25 m	16	AAS466000161	1
203 mm x 25 m	24	AAS466000241	1
203 mm x 25 m	36	AAS466000361	1
203 mm x 25 m	40	AAS466000401	1
203 mm x 25 m	50	AAS466000501	1
203 mm x 25 m	60	AAS466000601	1
203 mm x 25 m	80	AAS466000801	1
203 mm x 25 m	100	AAS466001001	1
203 mm x 25 m	120	AAS466001201	1

Bona 8100 Silicon Carbide Double-sided Disc

Double sided discs designed for use with Bona Buffer and Bona FlexiSand.

407 mm	24	AAS466800243	10
407 mm	36	AAS466800363	10
407 mm	40	AAS466800403	10
407 mm	60	AAS466800603	10
407 mm	80	AAS466800803	10
407 mm	100	AAS466801003	10
407 mm	120	AAS466801203	10







(



Silicon Carbide Abrasives

	Туре	Grit	Article number	Q/Box	
Bona 8100 Silicon Carbide Disc					
100 mm discs designed for Bona Dual Edge.					
	100 mm	36	AAS472600365	25	
	100 mm	60	AAS472600606	50	
ldeal for high speed edge	100 mm	80	AAS472600806	50	
sanding	100 mm	100	AAS472601006	50	
	100 mm	120	AAS472601206	50	
	150 mm	16	AAS466900165	25	
	150 mm	24	AAS466900245	25	
	150 mm	36	AAS466900365	25	
	150 mm	40	AAS466900406	50	
	150 mm	50	AAS466900506	50	
	150 mm	60	AAS466900606	50	
	150 mm	80	AAS466900806	50	
	150 mm	100	AAS466901006	50	
	150 mm	120	AAS466901206	50	
	150 mm	150	AAS466901506	50	
	178 mm	16	AAS467100165	25	
	178 mm	24	AAS467100245	25	
	178 mm	36	AAS467100365	25	
	178 mm	40	AAS467100406	50	
	178 mm	50	AAS467100506	50	
	178 mm	60	AAS467100606	50	
	178 mm	80	AAS467100806	50	
	178 mm	100	AAS467101006	50	
	178 mm	120	AAS467101206	50	
	200 mm discs designe	ed for Trio st	tyle machines.		
	200 mm	16	AAS466600165	25	
	200 mm	24	AAS466600245	25	
	200 mm	36	AAS466600365	25	
	200 mm	40	AAS466600406	50	
	200 mm	50	AAS466600506	50	
	200 mm	60	AAS466600606	50	
	200 mm	80	AAS466600806	50	
	200 mm	100	AAS466601006	50	
	200 mm	120	AAS466601206	50	

•







Aluminium Oxide Abrasives

	Туре	Grit	Article number	Q/Box
	Bona 8500 Alum	inium Ox	ide Belt	
	A good quality standard	abrasive for	use on all types of wood floors.	
	200 mm x 750 mm	16	AAS468000163	10
	200 mm x 750 mm	24	AAS468000243	10
	200 mm x 750 mm	36	AAS468000363	10
ldeal for softer timbers	200 mm x 750 mm	40	AAS468000403	10
	200 mm x 750 mm	50	AAS468000503	10
	200 mm x 750 mm	60	AAS468000603	10
	200 mm x 750 mm	80	AAS468000803	10
	200 mm x 750 mm	100	AAS468001003	10
	200 mm x 750 mm	120	AAS468001203	10
	200 mm x 750 mm	150	AAS468001503	10
	250 mm x 750 mm	16	AAS468200163	10
	250 mm x 750 mm	24	AAS468200243	10
	250 mm x 750 mm	36	AAS468200363	10
	250 mm x 750 mm	40	AAS468200403	10
	250 mm x 750 mm	50	AAS468200503	10
	250 mm x 750 mm	60	AAS468200603	10
	250 mm x 750 mm	80	AAS468200803	10
	250 mm x 750 mm	100	AAS468201003	10
	250 mm x 750 mm	120	AAS468201203	10
	250 mm x 750 mm	150	AAS468001503	10
	Belt designed for Bona	Scorpion and	d Bona Scorpion DCS.	
	200 mm x 480 mm	36	AAS472500363	10
	200 mm x 480 mm	40	AAS472500403	10
	200 mm x 480 mm	60	AAS472500603	10
	200 mm x 480 mm	80	AAS472500803	10
	200 mm x 480 mm	100	AAS472501003	10
	200 mm x 480 mm	120	AAS472501203	10





Q/Box





Aluminium Oxide Abrasives



For use with Bona FlexiDrum							
200 x 551 mm	16	AAS467900163	10				
200 x 551 mm	24	AAS467900243	10				
200 x 551 mm	36	AAS467900363	10				
200 x 551 mm	40	AAS467900403	10				
200 x 551 mm	50	AAS467900503	10				
200 x 551 mm	60	AAS467900603	10				
200 x 551 mm	80	AAS467900803	10				
200 x 551 mm	100	AAS467901003	10				
200 x 551 mm	120	AAS467901203	10				

Article number

Bona Scrad System



Pad for Bona FlexiSand and Bona Buffer. The Bona Scrad System is a unique abrasive system specially suited for intermediate sanding between coats of varnish. It combines an abrasive Scrad Wing with a soft conditioning pad that cuts off wood fibres and smoothes out scratches at the same time. The Scrad Wing has a Velcro backing that easily attaches to the Scrad Pad.

The Scrad Pad can also be used without the Scrad Wing for less aggressive cutting back.


Bona Scrad Pad	407 mm x 8 mm	320	AAS854303208	5
Bona Scrad Wing	Delta	150	AAS468601506	50







Specialist Abrasives

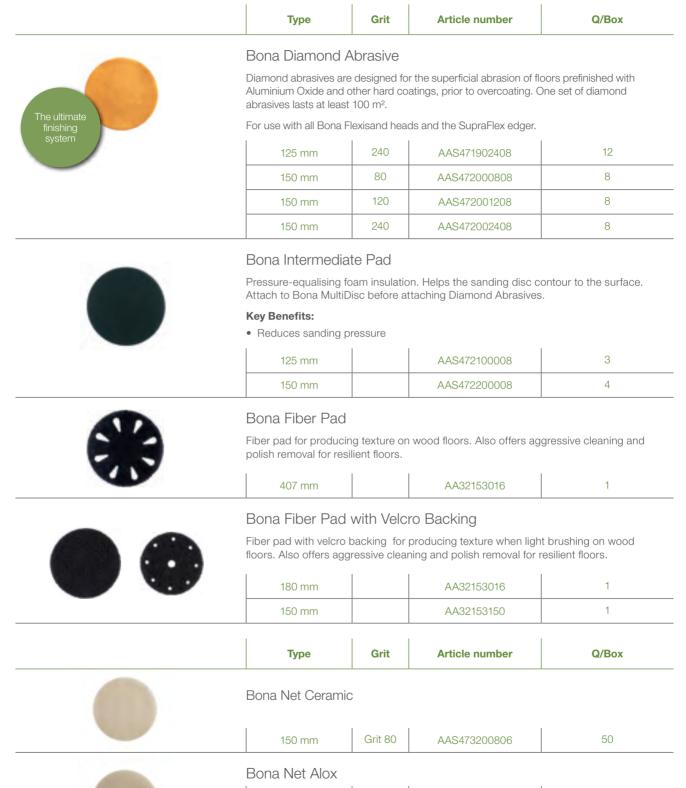



50

50



150 mm

150 mm

150 mm

Grit 80

Grit 100

Grit 120

AAS473300806

AAS473301006

AAS473301206





Screens

	Туре	Grit	Article number	Q/Box
--	------	------	----------------	-------

Sanding screens are used to prepare and condition the surface prior to coating. They are also used when cutting back the grain raise once the finish has been applied. Screens are extremely durable and the perfect product to be used when preparing an old, previously finished floor that is to be re-coated. For use on all kinds of wood floors.



Bona Sanding Screen, double-sided 407 mm

407 mm	Grit 60	AAS867100603	10
407 mm	Grit 80	AAS867100803	10
407 mm	Grit 100	AAS867101003	10
407 mm	Grit 120	AAS867101203	10
407 mm	Grit 150	AAS867101503	10

Cleaning Pads



280 mm Cleaning Pad for Bona Mini Buffer

White	AA68041000	5
Tan	AA68042000	5
Red	AA68043000	5

Article number

Q/Box

407 mm Cleaning Pad for Bona FlexiSand and Bona Buffer

White	AAS867300058	5
Tan	AAS867300038	5
Red	AAS867300048	5
Green	AAS867300028	5



Recommended Sanding Methods — Please refer to technical data sheets or speak to our technical department for more detailed information.

Speed For matt, extra matt, or natural waterborne lacquers

Coarse sanding	Medium sanding Fine sanding		
Grit 36-50	Grit 80	Grit 120	
Bona 8700, Belt/FlexiSand & Power Drive	Bona 8300 or 8600, Belt/FlexiSand & Power Drive	Bona Diamond or Net Ceramic, FlexiSand & Quattro Disc	

Colour For stains and pigmented oils

Coarse sanding	Medium sanding	Fine sanding
Grit 36-50	Grit 60 Grit 120	Grit 120
Bona 8700, Belt/FlexiSand & Power Drive	Bona 8300 or 8600, Belt/FlexiSand & Power Drive	Bona Diamond, FlexiSand & Quattro Disc

Standard For glossy, silk matt lacquers, non-pigmented oils or hard wax oils


Coarse sanding	Medium sanding	Fine sanding
Grit 36-50	Grit 80	Grit 120
Bona 8700, Belt/FlexiSand & Power Drive	Bona 8300 or 8600, Belt/FlexiSand & Power Drive	Bona Diamond or Net Ceramic, FlexiSand & Quattro Disc

Recoat For recoating / Bona Floor Treatment Programme - Silver


Deep clean	Fine sanding	Clean with water	Sealing	
	Grit 80 Grit 240			
Bona Power Scrubber & Deep Clean Solution	Bona Diamond, FlexiSand & Quattro Disc	Bona Power Scrubber and clean water	Bona Traffic HD	

Brushing Recommended abrading and brushing sequence before oil or lacquer treatments

Coarse	Medium	Waterpop	Texture	Texture	Fine Sanding
Grit 50	Grit 80	*		-	Grit 120
Bona 8700 Power Drive	Bona 8300 Power Drive	Waterpop (wet) the surface with water	Wire Brushes Power Drive	Fine Brushes Power Drive	Bona Diamond Quattro Disc

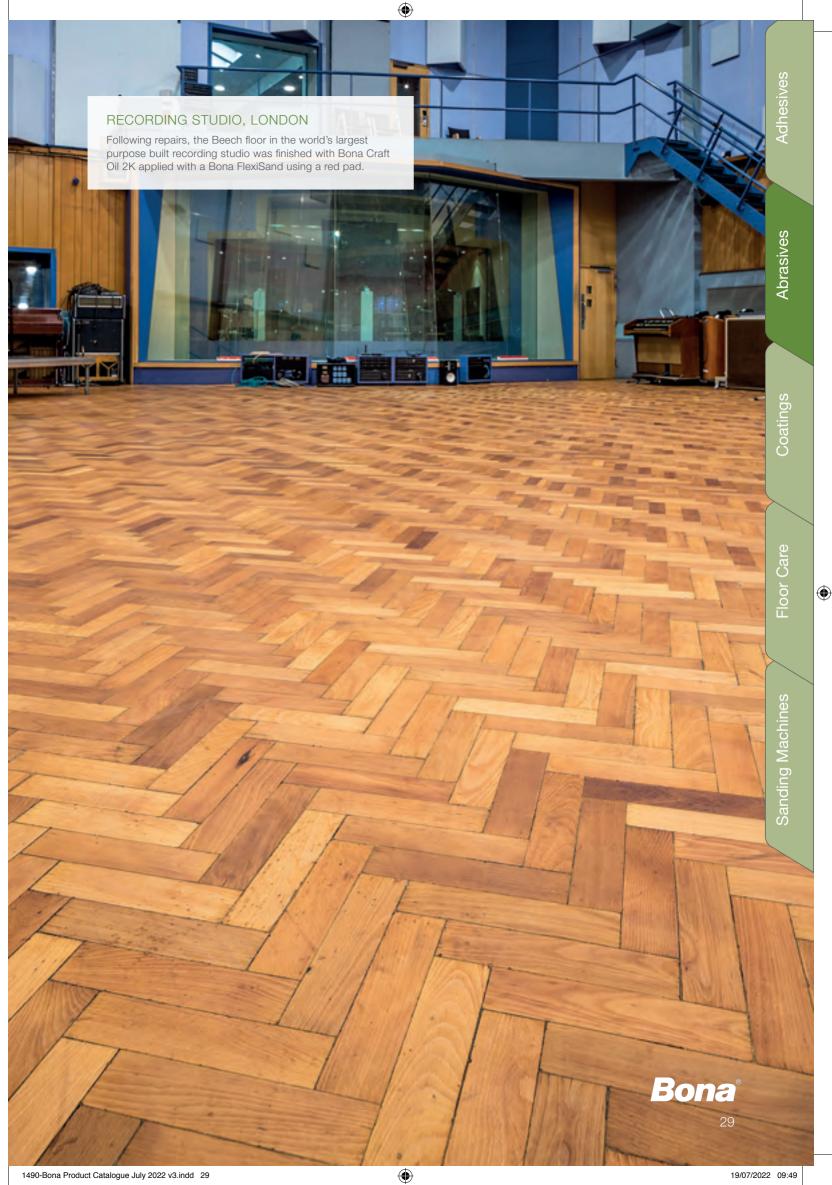

(

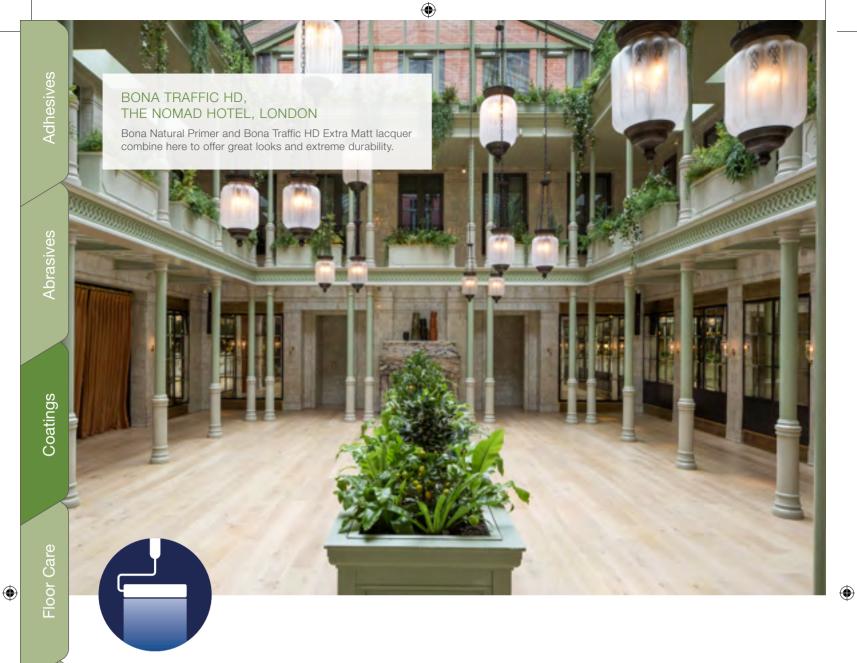

Coatings

Whether you're looking for shine, colour, slip resistance or durability, Bona has the ideal finish for all types of wood floor. Since the 1970s, we have pioneered the development of waterborne finishes, providing safe, low-VOC solutions.

In this section you'll find our primers, lacquers and oils as well as our SuperSport range of finishes and maintenance products for sports floors.

Technical and safety data sheets for all products are available for download at **bona.com** or speak to a member of our technical team for more information.





٠





Primers

	Туре	Article Number	Pack Size	Packs/Box		
	Bona White					
Primer producing a white tint look where the intensity can be controlled by one or more layers. Applied in a single layer it typically preserves the impresent untreated wood. For a truly white impression, apply two or more layers. His formulation designed for easy roller application. To optimise the white char overcoat with non yellowing Bona top coats such as Novia, Traffic HD, Traffic Mega One.						
W Book	Key Benefits:		Technical Data:			
CREENCUARD WINDOWS TO A TO THE STATE OF THE	White tint lookReduces woodEasy roller appli	hane 1-comp etween coats na Roller				
		WB250620001	5 L	3		







Bona Natural

A subtle white-tinted primer designed to preserve the impression of raw, untreated wood. Bona Natural is a highly forgiving formulation for easy roller application, is quick to dry and has good abrasion qualities. Bona Natural should be overcoated with Bona top coats such as Mega One (extra Matt), Traffic Natural or Traffic HD to avoid any colouration and to achieve the look and feel of pure wood with the superior protection of a quality lacquer.

Key Benefits:

- Produces a natural, unfinished look
- Reduces yellowing
- Easy roller application

Technical Data:

Base: Acrylate/polyurethane **Category:** Waterbased 1 comp **Drying time:** 1-2 hrs between coats

Applications: 1-2 **Application:** Bona roller **Coverage:** 10-12 m²/L

WB251620001 5 L 3



Bona Blocker

Additive for reducing bleeding from wood extracts and particularly extracts from knots as well as tannin bleed on white oak. Reduces the risk of stains developing on top of the knots and tannin bleed on white oak. One bottle is sufficient for two 5L cans of Bona White or Bona Natural Primer.

Key Benefits:

• Reduces yellowing from wood knots

Technical Data:

Mixing Ratio: 20:1 (4,8%)

Volume: 0.5L, enough for 2 x 5L of Prime

White or Prime Natural

WH341009001 0.5 L 1





Coatings

Primers

	Туре	Article Number	Pack Size	Packs/Box
		ce. Soft, flexible film reducing ties. Suitable on practically all		0 0 0
Bona Classic	Key Benefits: Light colouration All types of woo Reduces side-b Easy roller appli	nd nonding effects cation	Technical Data: Base: Acrylate Category: Waterborne Drying time: 1-2 hrs be Applications: 1 Application tools: Bor Coverage: 8-10 m²/L	etween coats
Bona B Some B So		WB200013012	1 L	12
(COMEC) (CHR)(CD)		WB200020012	5 L	3



Bona Intense

Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable on practically all types of wood and especially on tropical wood.

Key Benefits:

- Medium colouration
- All wood, tropical wood
- First choice for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp Drying time: 1-2 hrs between coats

Applications: 1

Application tools: Bona Roller **Coverage:** 8-10 m²/L

WB250020001 5 L



Bona Amber

Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable for oak and darker types of wood including tropical species.

Key Benefits:

- Rich colouration
- Oak, dark, tropical wood
- Good for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp Drying time: 1-2 hrs between coats

Applications: 1-2

Application tools: Bona Roller

Coverage: 8-10 m²/L

WB255020001 5 L 3

Bona Primers



Bona White



Bona Natural



Bona Classic



Bona Intense



Bona Amber









Lacquers

Type Article Number Pack Size Packs/Box

finish, both as a base- and topcoat and is easy to abrade.





Good build

Bona Domo

- Forgiving/easy application
- Easy to abrade
- Non-yellowing formula
- Primer and topcoat in one

Iе	cnn	ıcaı	Dat	a:

Base: Acrylate/polyurethane Category: Waterborne 1-comp Drying time: 1-2 hrs between coats Application tools: Bona Roller

Coverage: 8-10 m²/L per coat







Bona Domo is a member of the Bona family of premium finishes. With good build and a quick drying formula, it protects the wooden floor in no time. Bona Domo can be used from start to

Bona Novia

One-component and waterborne, gives superior protection for floors with normal domestic wear. Can be used with or without primer. Produces an even and warm colour and is nonyellowing. Also very good for cork floors.

Key Benefits:

- Superior protection for domestic areas
- Good resistance to typical household chemicals
- Very low VOC
- EN 71:3 Compliant

Technical Data:


Base: Polyurethane

Category: Waterborne 1-comp Drying time: 1-2 h between coats **Application tools:** Bona Roller



(









Coatings

Lacquers

Туре Article Number Pack Size Packs/Box









Bona Mega

For offices, small shops, hotel rooms and as a premium choice for homes. Innovative, waterborne, one-component formula, that reacts with oxygen and performs like a twocomponent formula. No mixing required, use straight from the bottle. Also very good for plank floors and for floors with underfloor heating. Produces a subtle rich tone which is more noticeable on light wood species and floors treated with light stains or whitening primers. Overcoating Bona White primer with Bona Mega is not recommended if you are looking to achieve a true white look.

Key Benefits:

- One-component with two-component performance
- Very good for underfloor heating
- Very low VOC
- EN 71:3 Compliant

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp Drying time: 2-3 hrs between coats Application tools: Bona Roller Coverage: 8-10 m²/L per coat

Slip resistance: Meets DIN 18032:2 for slip resistance (gloss, silkmatt, extra matt and matt)

Gloss	WT133013012	1 L	12
Gloss	WT133020002	5 L	3
Silkmatt	WT133313012	1 L	12
Silkmatt	WT133320002	5 L	3
Matt	WT133613012	1 L	12
Matt	WT133620001	5 L	3
Extra Matt	WT133920001	5 L	3





Bona Mega Natural

A product designed to recreate the look and feel of pure untreated wood, but with a tough and easy to maintain surface. Ideal for use in homes or light commercial environments. Produces a subtle rich tone which is more noticeable on light wood species and floors treated with light stains or whitening primers. Overcoating Bona White primer with Bona Mega Natural is not recommended if you are looking to achieve a true white look.

Key Benefits:

- Preserves the look and feel of pure wood
- Durable and easy to maintain
- Safe to use and environmentally friendly

Technical Data:

Base: Polyurethane

Category: Waterbourne 1-comp

Drying time: 2-3 hrs

Application tools: Bona Roller Coverage: 8-10 m²/L per coat

Natural	WT182820001	5 L	3
Natural	W1182820001	5 L	3





(





Lacquers

|--|









Bona Mega One

Bona Mega ONE is very easy to work with. Just shake the pack well, pour on the floor and away you go – no need for a primer. Ideal protection for wood floors in domestic and medium traffic commercial locations – especially on lighter wood species. As Mega One is a clear, non-yellowing product, it will not cause any change of colouration.

Key Benefits:

- High build characteristics
- Reduced drying time
- Excellent sanding properties
- Non-yellowing

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp Drying time: 1-2 hrs between coats Application tools: Bona Roller (11 mm)

Coverage: 8-10 m²/L per coat

Silkmatt	WT300313012	1 L	12
Silkmatt	WT300320001	5 L	3
Matt	WT300613012	1 L	12
Matt	WT300620001	5 L	3
Extra Matt	WT300913012	1 L	12
Extra Matt	WT300920001	5 L	3

Bona Traffic HD



(





Bona Traffic HD

The world's toughest and fastest drying finish for wooden floors exposed to extreme wear. You can walk on it after just 12 hours. Used in hotels, restaurants and airports worldwide, where short downtime is essential. Waterbased and very low VOC and odour. Non-yellowing.

Key Benefits:

- The ultimate choice for durability
- Superior protection for commercial and public areas
- Extra fast, allows full traffic after just 12 hours
- Very low VOC and odour
- EN 71:3 compliant

Technical Data:

Base: Polyurethane

Category: Waterborne 2-comp Drying time: 2-3 hrs between coats Application tools: Bona Roller Coverage: 8-10 m²/L per coat

Slip resistance: Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports

floors)

w erm	Silkmatt	WT155346001	4.95 L	3
	Matt	WT155646001	4.95 L	3
	Extra Matt	WT155946001	4.95 L	3
Hardener for Bona Traffic	HD (spare pack)	WH330045001	0.40 L	3









Lacquers







• Reduces risk of slipping

Bona Traffic HD Anti Slip

- DIN 51 130 R10
- BS 7976 low slip potential (PTV >36)
- AS 4586 P4
- Excellent resistance to wear
- Excellent application and levelling properties
- Non-yellowing
- Extra fast, allows full traffic after just 12 hours
- Very low VOC and odour

Bona Traffic HD Raw

Technical Data:

Adds the highest standard of friction in areas where it's needed the most – like stairs, corridors,

kitchens and food service areas. Superb performance against wet spills.


Base: Polyurethane

Category: Waterborne 2-comp Drying time: 2-3 hrs between coats **Application tools:** Bona Roller Coverage: 8-10 m²/L per coat









Its unique surface structure creates a soft, haptic feeling which is not only a pleasure to walk on but has a high slip safety making it great for homes with children and pets. Safe in both application and in use as shown in EC1PLUS classification for very low impact on the indoor air



Key Benefits:

· Keeps the look and feel of raw wood

environment. Clear, non-yellowing formula.

- Lacquered protection with natural impression
- Easy and safe to apply
- High slip safety

Technical Data:

Base: Polyurethane

4.95 L

Category: Waterborne 2-comp Drying time: 3-4 h between coats

Application tools: Bona Roller (AT3100100) Coverage: 8-10 m²/lit and application

Natural 3 Hardener for Bona Traffic HD Raw (spare pack) WH341045001 0.40 L 3

WT194846001



EC 1

Bona Retarder

An additive which improves the levelling and prolongs the open time of Bona waterborne primers and finishes. It is designed to be used when the humidity on site is low and/or the temperature of the room is higher than normal. Its use also reduces the risk of the finish drying too quickly and leaving roller marks in the dried coat.


WX100006001 200 ml 12		WX100006001	200 ml	12
-----------------------	--	-------------	--------	----





(

Bona lacquers - durability scale

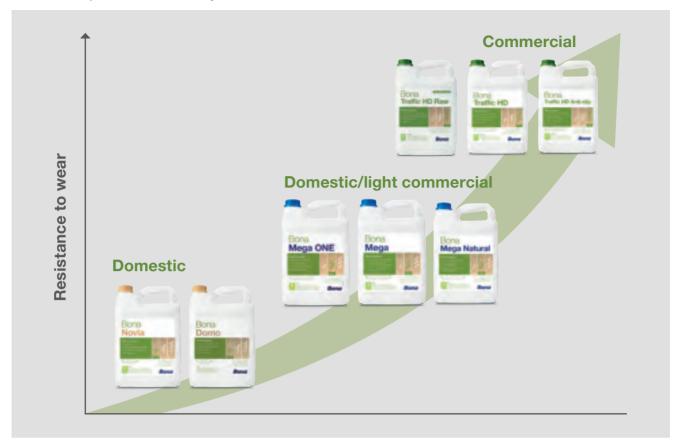

Bona finishes - reflective values

Product	Sheen given as reflective values at 60 degrees
Domo – matt	18%
Domo – silkmatt	40%
Mega Natural	6-8%
Mega/Mega One – extra matt	9%
Mega/Mega One – matt	20%
Mega/Mega One – silkmatt	40%
Mega – gloss	90%
Traffic Raw HD	4%
Traffic HD – extra matt	11%
Traffic HD – matt	20%
Traffic HD – silkmatt	40%
Traffic HD Antislip	15%
Novia – matt	25%
Novia – silkmatt	45%
Novia – gloss	85%
Hard Wax Oil – matt	10%
Hard Wax Oil – silkmatt	20%
Hard Wax Oil – extra matt	3%







Bona SuperSport

	Туре	Article Number	Pack Size	Packs/Box		
	Bona SuperSport Primer					
Bons ma	A one-component waterborne primer for untreated wooden sports floors. It delivers excelle adhesion to wood, as well as crucial side bonding reducing properties, and creates an optifoundation for top coats and line markings.					
2 Bone	Key Benefits:		Technical Data:			
	Medium rich woReduced risk of		Drying Time: 2-3 hours Tools: Roller, applicator			
FIBA (EC1)			Coverage: 8-10 m ² /L si	ngle coat application		
EQUIPMENT B VENUE		WB251020001	5 L	3		









Bona SuperSport One

A one-component lacquer recommended for use on newly sanded, sports specific floors. The formulation is based on oxygen crosslinking technology to achieve durability and enhanced appearance. Provides a tough, polyurethane finish with good build.

Key Benefits:

- High durability
- Low indoor air emission

Technical Data:

Drying Time: Ready for sanding/recoating:

2.5-3 hrs at 20°C/60° RH

Full hardness: 5 days at 20°C/60° RH

Tools: Roller, applicator Coverage: 8-10 m²/L per coat Slip Resistance: EN14904:2006 Sheen (at 60°): Matt – 20%, Gloss – 90%

Matt	WT138620001	5 L	3
Gloss	WT138020001	5 L	3









Bona SuperSport HD

A premium two-component waterborne wood floor lacquer developed for professional use on wooden multi-use floors and particularly as part of Bona's Silver renovation programme. The curing process takes approximately 3 days (90% cured in 24 hours, 100% after 72 hours). The floor may be played on after 24 hours but remains susceptible to scuffing until completely cured.

Key Benefits:

- Excellent durability
- Very low indoor air emission

Technical Data:

Drying Time: Ready for sanding/

recoating: 3 hours
Full hardness: 3 days
Tools: Roller, applicator
Coverage: 8-10 m²/L per coat

Slip Resistance: EN14904:2006

Sheen (at 60°): Matt – 20%, Gloss – 85%

Matt	WT137620001	5 L	3
Gloss	WT137020001	5 L	3
Hardener (Spare)	WH3330007006	200 ml	1







Bona SuperSport







Bona SuperSport Line Paint

Two component line paints for use on resilient and wooden sports floors. Developed for use with the Bona SuperSport system on both wood and resilient floors. Available in 10 vibrant colours.

Article Number

Key Benefits:

• Superb opacity

Туре

Quick drying

Technical Data:

Drying Time: (at 20°C/60% RH)

Line markings 1-2 hrs

Pack Size

Coverage: 6-10 m²/L per coat for solid areas. 120-200 linear metres for 50 mm wide lines Tools: Fine bristle brush or small, fine roller

Packs/Box

White	EC802013001	1 L	1
Black	EC801913001	1 L	1
Light Blue	EC801813001	1 L	1
Dark Blue	EC801713001	1 L	1
Light Green	EC801613001	1 L	1
Dark Green	EC801513001	1 L	1
Red	EC801413001	1 L	1
Violet	EC801313001	1 L	1
Orange	EC801213001	1 L	1
Yellow	EC801113001	1 L	1





Bona SuperSport

Type Article Number Pack Size Packs/Box



Bona SuperSport Cleaner

A cleaner that is gentle on the surface but effectively removes grease and grime, leaving no residue on the surface. Concentrated slightly alkaline formulation designed for frequent use. Low foaming and suitable for autoscrubber or manual application

Key Benefits:

- Safe for use on wood and resilient sports floors
- For autoscrubber or manual use

Heavy soiled floors: 100ml to 5L water and use

Technical Data:

WM763020001

5 L

3

Dilution: Normal cleaning: 50ml to 5L water



Bona SuperSport Deep Clean

Designed for periodic deep cleaning of sports floors, will remove black heel marks etc as well as the build-up of body fats and other contaminants. Diluted product should be applied using mop or spray equipment. After 3-5 minutes scrub using a buffing machine or autoscrubber and red pad, and make final pass with clean water.

Key Benefits:

- Degreases the surface
- Removes scuff marks
- Safe for use on wood and resilient sports floors

Technical Data:

Dilution: 1L to 5L water

WM636020001 5 L 3



FIBA, the International Basketball Federation, is the world governing body for basketball. The FIBA Equipment & Venue Centre produces publications which provide technical assistance for those who practice the sport or organise its competitions.

The objective is to attain a high standard of quality, safety and technology, for the athletes, for the public, as well as for the media, whose demands are ever-growing. This can only be obtained by a constant control and inspection of facilities and equipment.


Bona is proud to be a FIBA Equipment & Venue partner and approved supplier of finishes and maintenance products for wooden sports floors.





 \bigoplus



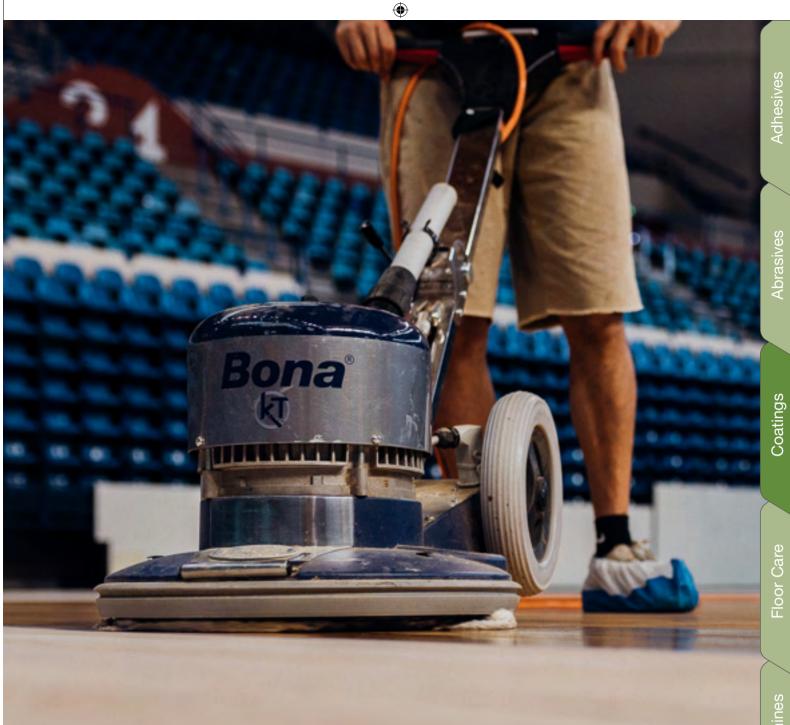



(

BONA SPORTS

Bona finishes and materials are used to renovate and protect multi use sports floors worldwide



(

(





Oils - Effect Treatment





Bona Rich Tone

Bona Rich Tone is a pre-treatment for wood floors, bringing out a dark, smoky wood colour*, giving the floor a touch of sophistication. Continue with a layer of Bona Craft Oil, any colour, for an exciting 2-dimensional effect or apply Bona Hard Wax Oil directly for an elegant finish. The colour can be changed or further intensified by adding 5% of Bona Mix Colour.

*the colour is achieved by a chemical reaction to wood and results may vary between wood species. Oak in particular produces a deep, dark colouration after treatment.

Kev Benefits:

- · Dark, smoky effect
- Quick drying
- Odourless

Technical Data:

Base: Alkaline solution

Category: Pre-treatment, 1-comp

Drying time: 1-2 hrs (between applications)

Application: Oil application sleeve Coverage: 8-10 m²/L per coat

WX900020001 5 L 3



Bona Mix Colour

Key Benefits:

Bona Mix Colour is a concentrated pigment paste for waterborne systems and specifically for Bona Nordic Tone and Bona Rich Tone. Added to either of these products it can intensify or change the colour of the Bona Tone to create a special effect. Note that the surface must always be treated with Bona Craft Oil or Bona Hard Wax Oil afterwards.

L		l	
		١	
bx (ol	d	
Ì	-		
		9	
		_	

Technical Data:

• Intensifies Bona tone treatments **Content:** Concentrated pigment paste Consumption: 250 ml for one 5 L bottle (5%) of Bona Nordic Tone or Bona Rich Tone.

Mahogany	GX504007	0.25 L	1
Walnut	GX504107	0.25 L	1
White	GX504207	0.25 L	1
Grey	GX504307	0.25 L	1
Black	GX504407	0.25 L	1









Oils - Wear Treatment

Type Article Number Pack Size Packs/Box



Over-coatable with all versions of Bona Traffic if required

Standard colours (bespoke colours can be mixed on request)

Bona Craft Oil 2K

Bona Craft Oil 2K gives you the natural look of an oiled floor but, when you need extra surface protection, it can be overcoated with all versions of Bona Traffic two component lacquers for added durability. The unique formula is made from modified plant-based oil and delivers tough protection to floors in all environments – even before the application of a lacquer coat.

Compatible with most wood species, even tricky ones such as Cherry and Walnut, floors treated with Bona Craft Oil 2K are ready for light use after just 8 hours (Neutral) or 12 hours (colours) and can be overcoated with lacquer, if required, after 12 hours.

Available in 16 standard colours, including Neutral, which can all be used in conjunction with Bona Tones and Mix Colours to create a wide range of colour effects. Bespoke colours can be mixed on request.

Key Benefits:

- Great stain, wear and water resistance
- Spot repairable
- Fast curing, ready for light use in 8 hours
- Extremely high degree of saturation
- Very low VOC content
- Overcoatable with all versions of Bona Traffic two-component lacquers

Technical Data:

Base: Modified vegetable oils plus

isocyanate hardener


Category: Hardening oil, 2-comp Drying time (until use): 8 hrs

Overcoating: 12 hrs

Application tools: Squeegee, roller, trowel

or buffer

Coverage: 30 m²/L

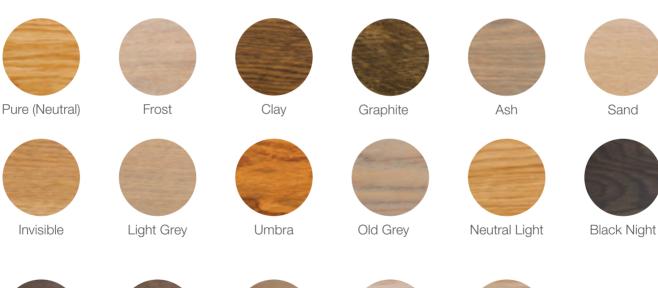



(





Grey Night



Dark Grey



Snow



Misty



19/07/2022 09:49





Bona Craft Oil 2K

Туре	Article Number	Pack Size	Packs/Box
Bona Craft Oil 2K Pure (Neutral)	GT570008001	0.4 L	1
Bona Craft Oil 2K Pure (Neutral)	GT570014001	1.25 L	1
Bona Craft Oil 2K Frost	GT571108001	0.4 L	1
Bona Craft Oil 2K Frost	GT571114001	1.25 L	1
Bona Craft Oil 2K Clay	GT572108002	0.4 L	1
Bona Craft Oil 2K Clay	GT572114001	1.25 L	1
Bona Craft Oil 2K Graphite	GT573108002	0.4 L	1
Bona Craft Oil 2K Graphite	GT573114001	1.25 L	1
Bona Craft Oil 2K Ash	GT574108002	0.4 L	1
Bona Craft Oil 2K Ash	GT574114001	1.25 L	1
Bona Craft Oil 2K Umbra	GT575108002	0.4 L	1
Bona Craft Oil 2K Umbra	GT575114001	1.25 L	1
Bona Craft Oil 2K Sand	GT579108001	0.4 L	1
Bona Craft Oil 2K Sand	GT579114011	1.25 L	1
Bona Craft Oil 2K Invisible	GT580008001	0.4 L	1
Bona Craft Oil 2K Invisible	GT580014011	1.25 L	1
Bona Craft Oil 2K Old Grey	GT577108001	0.4 L	1
Bona Craft Oil 2K Old Grey	GT577114001	1.25 L	1
Bona Craft Oil 2K Light Grey	GT576114011	0.4 L	1
Bona Craft Oil 2K Light Grey	GT576114001	1.25 L	1
Bona Craft Oil 2K Neutral Light	GT580108001	0.4 L	1
Bona Craft Oil 2K Neutral Light	GT580114001	1.25 L	1
Bona Craft Oil 2K Dark Grey	GT590408007	0.4 L	1
Bona Craft Oil 2K Dark Grey	GT590414007	1.25 L	1
Bona Craft Oil 2K Black Night	GT590108007	0.4 L	1
Bona Craft Oil 2K Black Night	GT590114007	1.25 L	1
Bona Craft Oil 2K Dark Brown	GT590208007	0.4 L	1
Bona Craft Oil 2K Dark Brown	GT590214007	1.25 L	1
Bona Craft Oil 2K Grey Night	GT590308007	0.4 L	1
Bona Craft Oil 2K Grey Night	GT590314007	1.25 L	1
Bona Craft Oil 2K Snow	GT590508007	0.4 L	1
Bona Craft Oil 2K Snow	GT590514007	1.25 L	1
Bona Craft Oil 2K Misty	GT590608007	0.4 L	1
Bona Craft Oil 2K Misty	GT590614007	1.25 L	1



Bona Craft Oil 2K - wet samples

Туре	Article Number	Pack Size
Bona Craft Oil 2K Pure (Neutral)	EMS0561009001	40 ml
Bona Craft Oil 2K Frost	EMS0571109001	40 ml
Bona Craft Oil 2K Clay	EMS0572109001	40 ml
Bona Craft Oil 2K Graphite	EMS0573109001	40 ml
Bona Craft Oil 2K Ash	EMS0574109001	40 ml
Bona Craft Oil 2K Sand	EMS0579109001	40 ml
Bona Craft Oil 2K Invisible	EMS0580009001	40 ml
Bona Craft Oil 2K Light Grey	EMS0576109001	40 ml
Bona Craft Oil 2K Umbra	EMSO575109001	40 ml
Bona Craft Oil 2K Old Grey	EMSO577109001	40 ml
Bona Craft Oil 2K Neutral Light	EMSO580109001	40 ml
Bona Craft Oil 2K Black Night	EMSO590109001	40 ml
Bona Craft Oil 2K Dark Brown	EMSO590209001	40 ml
Bona Craft Oil 2K Grey Night	EMSO590309001	40 ml
Bona Craft Oil 2K Dark Grey	EMSO578109001	40 ml
Bona Craft Oil 2K Snow	EMSO590509001	40 ml
Bona Craft Oil 2K Misty	EMSO590609001	40 ml

These samples are supplied without hardener and are for the purposes of colour checking/matching only.

Bespoke colours

Bona's in house colour mixing service means that bespoke colours for Bona Craft Oil 2K can be mixed on request to match existing surfaces or new design schemes. Please speak to our sales or technical team to discuss your requirements.





Coatings

Oils - Wear Treatment





Bona Hard Wax Oil

Natural oil, modified for superior protection of wood floors. Produces the warm look of an oiled floor while establishing a hard-wearing and stain resistant surface that is spot-repairable and easy to maintain. Unique composition formulated without controversial substances such as cobalt and ketoximes. Very low in odour and easy to handle, being applicable with roller, brush or trowel. Leaves an open, breathing surface that reduces the risk of side-bonding. Highly suitable for floors with underfloor heating. Should you wish to transform your floor with a new colour then simply prepare the surface with Bona Craft Oil and/or the Bona Rich Tone before sealing your masterpiece with 1-2 layers of Bona Hard Wax Oil.

Key Benefits:

- Tough, dirt repellent surface
- Excellent water resistance
- · Very low in odour
- Free from cobalt and ketoximes
- EN 71:3 Compliant

Technical Data:

Base: Modified vegetable oils and waxes Category: Hardening oil, 1-comp Drying time (until use): 24 hrs Application tools: Roller, brush or

stainless steel trowel

Coverage: 24 m²/L per coat

Silkmatt	AF3102013	1 L	6
Silkmatt	AF3100025	2.5 L	2
Silkmatt	AF3102010	10 L	1
Matt	AF3602013	1 L	6
Matt	AF3600025	2.5 L	2
Matt	AF3602010	10 L	1
Extra Matt	AF390013001	1 L	6
Extra Matt	AF390015001	2.5 L	2
Extra Matt	AF390024001	10 L	1





(





Oils - Wear Treatment

Type Article Number Pack Size Packs/Box



Bona Oil 35

Bona Oil 35 is a hardening oil which contains less than 10% VOC, and is intended for the surface treatment of untreated wood floors exposed to normal or heavy wear. Due to its application and quick drying time, the floor may be completed in one working day. Meets DIN EN 71:3 (for use on children's toys etc).

Key Benefits:

• Quick drying, fast working process

- Low risk of bleed-back
- Economic, long-lasting formula.
- Reduced risk of slipping, classified R10 according to DIN 51130
- Meets RAL-UZ 38 for VOC and formaldehyde emissions
- Meets EN 71:3 for use on children's toys
- Free from cobalt

Technical Data:

Drying Time: (at 20°C/60% RH)

24 hrs (before use)

Tools: Rubber bladed applicator, steel trowel

or buffing machine

Waiting time between coats:

20 minutes

Coverage: 10-12 m²/L total consumption

(depending upon species)

	GT590013001	1 L	6
	GT590020001	5 L	2

Oils - Outdoor

(





Bona Decking Oil

Bona Decking Oil is a concentrated blend of vegetable oils, modified for superior impregnation and long-lasting protection of wooden deckings and other exterior woodwork. It enhances the natural wood grain while protecting against moisture ingress and reducing the potential of wood cracking and warping.

Key Benefits:

- Long-lasting protection
- Contains UV protection
- Highly water repellent

Technical Data:

Base: Modified vegetable oils Category: Hardening oil, 1-comp Drying time (until use): 24 hrs

Application: Wide brush or Bona Oil Roller

Coverage: Approx. 20 m²/L

Neutral	GT551115001	2.5 L	4
Neutral	GT551124001	10 L	2
Mahogany	GT551215001	2.5 L	4
Teak	GT551315001	2.5 L	4
Grey	GT551515001	2.5 L	4



(





Fillers

	Туре	Article Number	Pack Size	Packs/Box
	Bona Mix & F	ill Plus		
Bona Mix& Fill Pks	Designed to be mi	ification of a completely in the floor being treated inor defects and gaps o u etc.	l, Mix & Fill Plus dries	
	Key Benefits:		Technical Data:	
Bone	Exceptional fillinQuick dryingAnti-corrosiveOdourless		Drying Time: (at 20°C/ 15-30 minutes before su 30-60 minutes before su 1-2 hrs before application Coverage: 8-10 m²/L	ubsequent application, anding
	1			

WF220020001



Bona Mix & Fill

Waterborne Mix & Fill is designed to be mixed with fine sanding dust from the floor to be treated, dries quickly and can be sanded. For filling gaps up to 2 mm.

Key Benefits:

- Easy to sand
- Quick drying
- Anti-corrosive
- Odourless

Technical Data:


5 L

Drying Time: (at 20°C/60% RH) 15-30 minutes before subsequent application, 30-60 minutes before sanding 1-2 hrs before application of oil or finish

3

Coverage: 8-10 m²/L


	WF21001302	1 L	10
	WF21002002	5 L	3

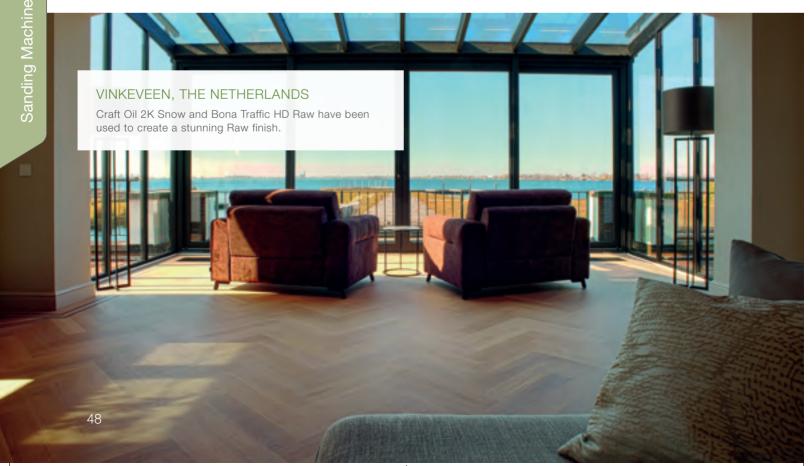



Fillers

(



Key Benefits:

- High degree of flexibility
- Can be sanded and overcoated
- Solvent free
- Silicone free

Technical Data:

Drying time: (at 20°C/60% RH) 18-24 hrs **Coverage:** Up to 6 linear metres per tube

For gaps up to 5 mm deep and 10 mm wide

Silicone free			For gaps up to 5 mm (deep and 10 mm wide
	Beech Dark	AF4411311003	310 ml	12
	Ash / Fir	AF4411311103	310 ml	12
	Oak Dark	AF4411311203	310 ml	12
	White	AF4411311303	310 ml	12
	Maple	AF4411311403	310 ml	12
	Beech Light	AF4411311503	310 ml	12
	Oak Light	AF4411311603	310 ml	12
	Cherry	AF4411311703	310 ml	12
	Bog Oak	AF4411311803	310 ml	12
	Wenge	AF4411311903	310 ml	12
	Black	AF4411312003	310 ml	12
	Nut	AF4411312103	310 ml	12
	Teak	AF441131203	310 ml	12
	Red Exotic Wood	AF4411312303	310 ml	12
	Grey	AF4411312503	310 ml	12







Tools for use with coatings

Article No.

Q/Box

Product Information



Bona Extension Bar - Silver

For use with Bona applicators, no adaptor required.

AT31401002

1

Telescopic - 110-200 cm



Rubber Bladed Applicator

Oil applicator for use with Bona Oil 35 and Bona Craft Oil range.

AT31302001

- 1

50 cm



Applicator Sleeve

Replacement sleeve for use with Swivelhead Applicator.

AT956903

6

46 cm



Swivel Head Applicator

For use with Applicator Sleeve. Extension handle also available separately.

AT956904

1

46 cm



Mixing Bottle

Plastic bottle with measurements for decanting/mixing Bona Traffic/Bona Sportive with hardener. Product must be used within four hours of mixing.

30031

1

2 L









Tools for use with coatings	Article No.	Q/Box	Product Information



Bona SuperCoat Roller (Lacquer)

Quality roller with a polyester pile for correct application rate of lacquer. 11 mm pile.

AT31002325	1	25cm
AT31002338	1	38cm



Bona Hardwax Oil Roller Microfibre

Short pile synthetic roller for the application of hard wax oil.

AT31120897	10	25cm x 5cm



Bona Lacquer Roller 12cm

Synthetic roller for the application of lacquer. Designed specifically for the application of Bona waterborne finishes and primers. Narrow roller for edges and stair treads. Medium pile.

AT31002500	10	12cm
------------	----	------



Roller Handles for rollers

AT31004000	1	12cm
AT31014001	1	25cm
AT31002800	1	30-50cm








Tools for use with coatings	Article No.	Q/Box	Product Information
	Flat Bladed Trow	el	
	Trowel for the application systems.	on of Bona Quick	primer or many of the Bona Oil
	AT31400270	1	270 mm
	AT31400350	1	350 mm
	Bona Wool Pad		
	Pad for Bona FlexiSand and Bona Buffer. The pad is made of genus sheep wool for application of oil and polishing of oiled or waxed flow produces higher heat towards the surface compared to synthetic which improves the penetration of oil into the wood and accelerated drying process. Contains natural lanolin (wool wax) for a satin finish recommended for Bona Oils.		
	AA68071000	5	407 mm
	Bona Oil Pad		
	Pad for buffing in oil.		
	AAS867300068	5	407 mm
	Bona Oil Cloth		
	Lint-free cloth for remov	al of excess oil.	
	AT32086000	1	
	Plastic Liners		
	Plastic liners for roller tr	ays - available F0	DC with purchases of lacquer –
	30055	1	







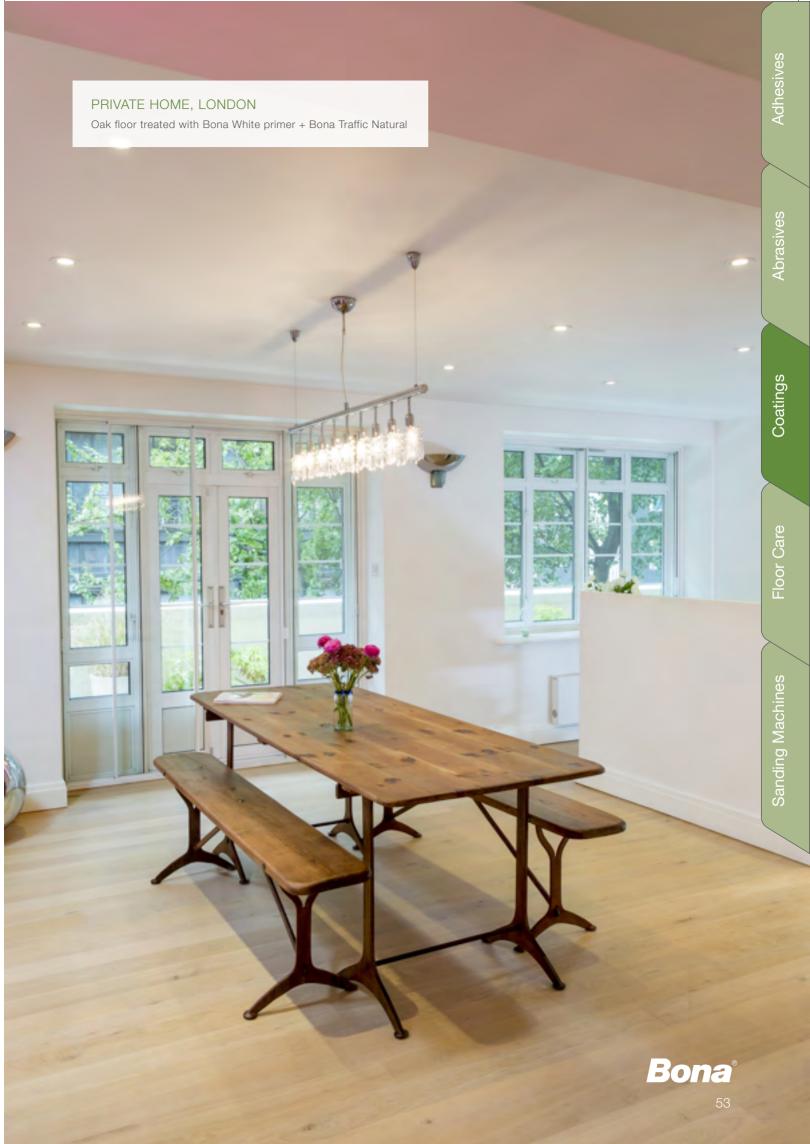

(

•



Floor Care

Regular maintenance with the right products is essential to prolong the life of every wood floor whether it is finished with lacquer or oil.

Bona offers products for home owners and commercial maintenance teams to make cleaning straightforward and effective.

Technical and safety data sheets for all products are available for download at **bona.com** or speak to a member of our technical team for more information.



Retail display units are available – speak to your local Bona representative.





(





Deep Clean System



Bona Power Scrubber

Article Number

The Bona Power Scrubber is a compact, powerful scrubbing machine for cleaning lacquered and oiled wooden floors. When used with Bona Deep Clean Solution, it removes the toughest dirt and grime with ease. The two counter-rotating cylindric brushes clean deeply, even on rough, brushed surfaces and on wood floors with bevelled edges. The rubber squeegees ensure an extremely effective water pickup which makes it safe to use on wood floors. Also suitable for cleaning tiled floors and outdoor decking.

Key Benefits:

Type

- Powerful and easy to manoeuvre
- Extremely effective water pickup
- Easy to fill, clean and transport
- Indoor and outdoor use

Technical Data:

Motor rating: Max 2700 W, Avg. 1900 W Power supply: 220-240 V / 50 Hz

Packs/Box

Machine weight: 34.5 kg

Pack Size

Scrubbing brush: 2 x 400 mm soft white

nylor

Solution capacity: 10 L Recovery tank capacity: 10 L

Dimensions: 520 mm x 470 mm x 300 mm

AM400201100 1



Roller Brush

White – For regular cleaning of oiled, lacquered or hard wax oiled floors.

Orange – For profiled decking.

Red – For intensive cleaning of oiled, lacquered and hard wax oiled floors.

White	AS3647622500	400 mm	1
Orange	AS3647625250	400 mm	1
Red	AS3647624580	400 mm	1



Deep Clean Solution

Concentrated cleaner for use with Bona Power Scrubber. Suitable for wood floors finished with oil or lacquer as well as outdoor decks. Perfect for degreasing the surface before application of polish.

Key Benefits:

- Revitalises dull, dirty floors
- Dissolves deeply engrained dirt and stubborn scuff marks
- Optimised for Bona Power Scrubber

Dilution:

Dilute with clean water

- Lacquered surfaces: 1:10
- Oiled surfaces: 1:20
- Outdoor deckings: 1:5

WM650020010 5 L 3







Floor Care

Commercial Cleaners for Lacquered Floors

	Туре	Article Number	Pack Size	Packs/Box		
Bona Cleaner	Bona Cleaner New formulation for powerful, low-foaming cleaning of sealed wooden floors. For use with autoscrubber or conventional cleaning methods. A pH neutral detergent which leaves no residue. A concentrate which must be diluted before use. Dilution: 100 ml/10 L water					
-		WM760013001	1 L	10		
		WM760020001	5 L	3		



Bona Polish

A polyurethane-enhanced formulation delivering an extremely durable surface, with a choice of Gloss or Matt finish, for sealed wooden floors. Floors which have been previously treated with polish must be sanded back to bare wood prior to applying a finish.

Coverage: 50 m²/L

Drying Time: (at 20°C/60%RH) at least 1 hr

Matt	WP500313001	1 L	10
Matt	WP500320001	5 L	3
Gloss	WP511013001	1 L	10
Gloss	WP511020001	5 L	3



Bona Freshen Up

A ready to use waterborne polyurethane maintenance coating for most finished and pre-finished lacquered wood floors. Bona Freshen Up will revive a scratched and dull surface in addition to providing continued protection against wear. It meets DIN 18 032 for slip resistance. To be applied with the Bona Applicator Pad.

Coverage: 30-50 m²/L Single coat application

Drying Time: (at 20°C/60%RH) Approx. 2 hrs

	WP595013016	1 L	10
	WP595020002	5 L	3





(



Commercial Cleaners for Lacquered Floors



Commercial Cleaners for Oiled Floors



Bona Wax Oil

Bona Wax Oil is a blend of natural waxes designed for the periodic maintenance and cleaning of wood floors treated with either a UV-oil or Bona Hard Wax Oil. It may also be used to give the hard waxed surface a glossier appearance. Can also be used for spot repair.

Drying Time: (at 20°C/60% RH)
Approximately 12 hrs
Tools: Bona Wool Pad/Buffing Machine
Coverage: 50-80 m² depending on wood species. Single coat application





(

Bona Oil Care

A low VOC maintenance oil with excellent penetration properties. Designed for use on floors treated with Bona Craft Oils.

Drying Time: (at 20°C/60% RH) Approximately 2 hrs

Tools: Bona Wool Pad/Buffing Machine **Coverage:** 50-100 m² depending on condition of floor. Single coat application

Neutral	GT525113100	1 L	6
Neutral	GT525120100	5 L	2
White	GT525213100	1 L	6
Grey	GT525313100	1 L	6



Bona Oil Soap

A low pH cleaner for floors treated with Bona Craft Oils. Use diluted and allow one hour before buffing.

Dilution: 200 ml/10 L water

	WM704013100	1 L	6
	WM704020100	5 L	3







Floor Care

Retail Cleaning Products

		Bona Spray M	Mop for Wood Floors		
CONTROLATO GENERALD GENERALD GENERALD GENERALD	Saf	spray and wipe the Wood Floor Clean	Mop is the easiest and most ef e floor clean. The Spray Mop p er and a washable Bona micre waxed) wood floors sparkling	pack includes a refillable ofiber cleaning pad – all	0.85L cartridge of
			CA201010011	1	4
		, ,	Mop for Hard Surface	all of your hard floor surf.	aces. Simply spray and

Article Number

Type





wipe the floor clean. Gives a great streak-free finish on shiny surfaces such as ceramic tiles. The Spray Mop pack includes a refillable 0.85L cartridge of Stone, Tile and Laminate Cleaner and a washable Bona microfiber cleaning pad.

Pack Size

Packs/Box

CA202020011





Bona Spray Mop for Oiled Floors

The Bona Spray Mop for Oiled Floors is the easiest and most effective way of cleaning oiled wood floors in the home. Simply spray and wipe the floor clean. The Spray Mop pack includes a refillable 0.85L cartridge of Cleaner for Oiled Floors and a washable Bona microfiber cleaning pad. The cleaner supplied with this mop is perfect for oiled floors and will nourish and protect the surface as it cleans.

> CA401010011 4



Bona Spray Mop Cartridges

Refillable cartridge of ready to use cleaners for Bona Spray Mops.

Bona Wood Floor Cleaner	WM760341041	850 ml	6
Bona Stone, Tile & Laminate Cleaner	WM760341051	850 ml	6
Bona Oiled Floor Cleaner	WM700141031	850 ml	6
Bona OxyPower Wood Floor Deep Cleaner Cartridge	WM857041041	850 ml	6
Bona OxyPower Hard Surface Floor Deep Cleaner Cartridge	WM857041011	850 ml	6





•





Retail Cleaning Products				
	Туре	Article Number	Pack Size	Packs/Box
	Bona Wood F	Floor Cleaner Refill Pa	ck	
Bona		Wood Floor Cleaner. Ready to cks or Spray Mop cartridges.	o use non-streak formula	ation. Ideal for topping
		WM740119011	4 L	3
	Bona Stone,	Tile & Laminate Clear	ner Refill Pack	
Bona		of Stone, Tile & Laminate Clear itre spray packs or Spray Mop		reak formulation. Ideal
		WM740219021	4 L	3
	Bona Oiled F	loor Cleaner Refill Pac	k	
Bona	'	or use on wood floors treated tection. Ideal for topping up 1		
		WM700115021	2.5 L	4
RO	Bona OxyPower Wood Floor Deep Cleaner Refill Pack			
Boña	Powerful cleaning action powered by hydrogen peroxide, designed to remove heavy dirt build up from all types of wood floors.			
		WM857015001	2.5 L	4
Bona	Powerful cleaning	ower Hard Surface Floo g action powered by hydrogen of hard surface floors such as	peroxide, designed to r	remove heavy dirt build

WM857015011

2.5 L







Floor Care

Retail Cleaning Products

|--|





Bona Wood Floor Cleaning Kit

A boxed starter kit containing a Bona telescopic, swivel-head mop, a washable Bona microfiber cleaning pad and 1 litre spray pack of Wood Floor Cleaner.







Bona Stone, Tile & Laminate Cleaning Kit

A boxed starter kit containing a Bona swivel-head mop, a washable Bona microfiber cleaning pad and a 1 litre spray pack of Stone, Tile & Laminate Cleaner.

Bona

CA101019021

1

6

6



Bona Premium Microfiber Mop

With a durable telescopic handle and extra-large mop head, this mop provides a quick and easy way to keep floors thoroughly clean. Pack includes mop and washable cleaning pad.

CA101065

1

(



Bona Floor Cleaner Spray

1 litre spray packs of Bona floor cleaners.

	1	1	
Bona Wood Floor Cleaner Spray	WM740113011	1 L	6
Bona Stone, Tile & Laminate Cleaner Spray	WM740213021	1 L	6
Bona Cleaner for Oiled Floors Spray	WM700113001	1 L	6
Bona OxyPower Wood Floor Deep Cleaner Spray	WM857013001	1 L	6
Bona OxyPower Hard Surface Floor Deep Cleaner Spray	WM857013011	1 L	6







(





Floor Care

Retail Cleaning Products

	Туре	Article Number	Pack Size	Packs/Box
	Bona Wood F	Floor Refresher		
Bona	which are dull, scr	ated, ready to use, waterborne atched or show signs of wear. of wood floors, making old flo	Bona Wood Floor Refre	esher restores the
Coverage: 30-50 m²/L				
		WP595013010	1 L	6



Bona Wood Floor Polish

A ready to use waterborne coating to restore shine (Gloss version), preserve matt look (Matt version) and protect against wear. Not to be used on waxed or oiled floors.

Coverage: 30-50 m²/L

Gloss	WP511013011	1 L	6
Matt	WP500313011	1 L	6



Bona Stone, Tile & Laminate Polish

A ready to use maintenance coating for hard floors. Provides a new shine plus extended protection and resistance to wear.

Coverage: 50 m²/L

WP511013021 1 1 6			
WI SHOTOLOGET	WP511013021	1 L	6



Bona Polish Remover

Removes build up from polish and other maintenance products. Suitable for water resistant surfaces such as varnished wood, tiles, PVC and linoleum. Dilute before use.

Dilution: 1 L/5 L water

WM634013001	1 L	6
-------------	-----	---









Retail Cleaning Products	1	I	I	ı	
	Туре	Article Number	Pack Size	Packs/Box	
700	Bona Oil Refr	esher			
	Designed to maintain the surface of oiled floors by adding protection and giving new lustre to dull surfaces. Do not use on previously waxed floors.				
Bona	Coverage: 50 m ²	/L			
		WP600013001	1 L	6	
Bona /	Bona Cleanin	ig Pad			
	Bona Cleaning Pad is a washable microfibre pad that attaches with Velcro-like strips to Bona Mop and can be washed up to 500 times. (Do not use fabric conditioner when v				
MA	Blue	CA101020	1	8	
Bona /	Bona Dusting	g Pad			
2000	with Velcro-like s	ad is a fluffy washable micr trips this dusting pad is an e our floors. (Do not use fabric	excellent way of picking	g up dust and pet ha	
	Grey	CA101021	1	8	
Bona /	Bona Applica	itor Pad			
	Refreshers. Wash	Pad is designed for the appl nable and reusable and atta conditioner when washing.)			
	1		I	I	

Beige	CA101025	1	8
-------	----------	---	---



Bona Deep Clean Pad

Bona Deep Clean Pad uses PowerLoop® technology to lift and remove heavy dirt build-up. For the best results, use with Bona OxyPower Wood Floor Deep Cleaner or Bona OxyPower Hard-Surface Floor Deep Cleaner.

Blue/Green	CA101059	1	8
------------	----------	---	---





Sanding Machines

Bona's sanding machines offer exceptional results and are designed for maximum efficiency, ergonomics and safety.

Whether you are looking for solutions to coarse sanding, fine sanding, edge sanding or dust-free sanding, Bona has state-of-the-art solutions for every situation.





(





Sanding Machines

Belt Sanders Volt / Hertz **Article number** Type

Bona Belt Original ** KININZLE&TASIN



A compact design makes the Bona Belt simple to manoeuvre and the specially designed transport cart makes it easy to move between jobs. Powerful and effective, with two optional drum widths (200 and 250mm), this is a highly versatile machine that's easy to take apart and reassemble. The easy-start function ensures reliable start-up under all conditions and the large front and side covers make for easy access to the drum and tension roller. The efficient vacuum minimises dust but for optimal dust reduction, use in conjunction with a Bona DCS dust containment system.

Key Benefits:

- Compact Design
- Soft start motor
- Easy to disassemble and re-assemble
- Ergonomic feather handle for raising and lowering drum
- Optional transport cart and drum weight
- 250mm drum size for fastest possible

250 x 750 mm

AMO110000.4

AMK175001

Technical Data:

Easy start: Enables 1-push start on a

10 A fuse

Motor power: 2.2 KW

Weight: 74 kg

Dust discharge: < 2 mg / m³ air

Drum width: 250mm

Sanding Belt size: 250 x 750mm

Drum speed: 1750 RPM

230 V / 50 Hz 2.2 kW

230 V / 50 Hz

Bona Belt Lite "KÜNZLE&TASIN



A lightweight yet powerful and well balanced machine which can be easily broken down into three parts and quickly reassembled.

Key Benefits:

- Superb manoeuvrability
- Light 60 kg weight
- Up to 50% weight can be applied to the drum
- Easy, tool-free fitting of abrasives

Technical Data:

Drum width: 200 mm

Sanding belt size: 200 x 750 mm

Total weight: 60 kg

Drum revolutions: 2400 rpm

2.2 kW

Bona Belt UX 2.2 WKUNZLE&TASIN



A genuine user-experience based design, the Bona Belt UX was developed following extensive feedback from flooring contractors. The result is an easy to control, highly manoeuvrable machine that delivers precise and efficient sanding. Low vibration combines with high performance to deliver a smoother surface with no chatter marks.

Key Benefits:

- Smooth and controlled lowering of the drum Motor Power: 2.2 KW
- Optimum results when coarse sanding all types of wood flooring
- Compatible with all versions of Bona DCS for dust free sanding

Technical Data:

Weight: 85kg Drum Width: 200mm

Sanding Belt Size: 200 x 750mm **Drum speed:** 1800-2050 RPM

Туре	Article number	Power	Volt / Hertz
200 x 750 mm	AMK173101	2.2 kW	230 V / 50 Hz

Bona Scorpion WKUNZLE&TASIN

Expansion Sanders



An expanding drum machine designed for professional or DIY use. A unique 'dead-man' handle device ensures safe operation.



Key Benefits:

- Compact design
- Weighs just 45 kg
- 'Dead-man' safety feature
- Easy, tool-free fitting of abrasives
- Easy pressure adjustment
- Suitable for use with distressing drum to texture wood floors on site

Technical Data:

Drum width: 200 mm

Sanding belt size: 200 x 480 mm

Total weight: 45 kg

Drum revolutions: 3000 rpm

200 mm AMK180001 1.5 kW 230 V / 50 Hz









Sanding Machines

Edge Sanders Type Article number Power Volt / Hertz

Bona Edge UX "KÜNILE&TASIN



The new Bona Edge UX has been designed to optimise user experience and deliver a great performance. The innovative arm design lets you sand closer to walls and corners. The three handles offer flexible driving positions for greater comfort and the position of the disc within the chassis means both 130mm and 220mm versions handle like a dream and minimise risk of chatter marks. Bona Edge UX is compatible with all versions of Bona DCS for dust-free sanding.

Key Benefits:

- Low 92 dB engine noise level
- 16 LED lights for optimum visibility
- Use with holed or Velcro-back discs
- Dead man's handle safety feature

Technical Data:

Motor Power: 230V-50Hz-1.25KW


Sanding Arm Length: 130 mm and 220 mm

Sanding Arm Height: 58 mm Weight 130 mm arm: 14.4 kg Weight 220 mm arm: 15.4 kg

Noise Level: 92 dB Light: LED Strip Disc Size: 178 mm Disc Speed: 3000 rpm

220 mm	AMO230501	1.25 kW	230 V / 50 Hz
130 mm	AMO230601	1.25 kW	230 V / 50 Hz

Bona CombiEdge (** (** RUNZLE& TASIN



Also available as the Bona CombiEdge Package with both short and long arms supplied.

Key Benefits:

- Easily switchable arm
- Very manoeuvrable
- Lightweight
- Efficient vacuuming
- Safety operating switch on the handle

Technical Data:

Discs diameter: 150 mm **Total weight:** Short arm 7.5 kg

Long arm 8.3 kg

Length sanding arm: 125 mm/330 mm

Disc speed: 3300 rpm

Bona CombiEdge Box Package






The CombiEdge Box Package includes a 125mm & 330mm long and short arm attachment for the CombiEdge. Supplied in a specialist plastic carry case with a trolley and rubber wheels for easy transportation. Foam inlay is designed to house the machine in a standing position with long arm on the side. Can accommodate both Combi Edge Short and the long arm while still allowing space to include any abrasive boxes, extension cables and any other tools needed.

Bolla Collidicage Box Fackage 123 & 330 IIIII Alvinzoz Io I 1.13 kW 230 V / 30 IIz	Bona CombiEdge Box Package	125 & 330 mm	AMK282101	1.15 kW	230 V / 50 Hz
--	----------------------------	--------------	-----------	---------	---------------





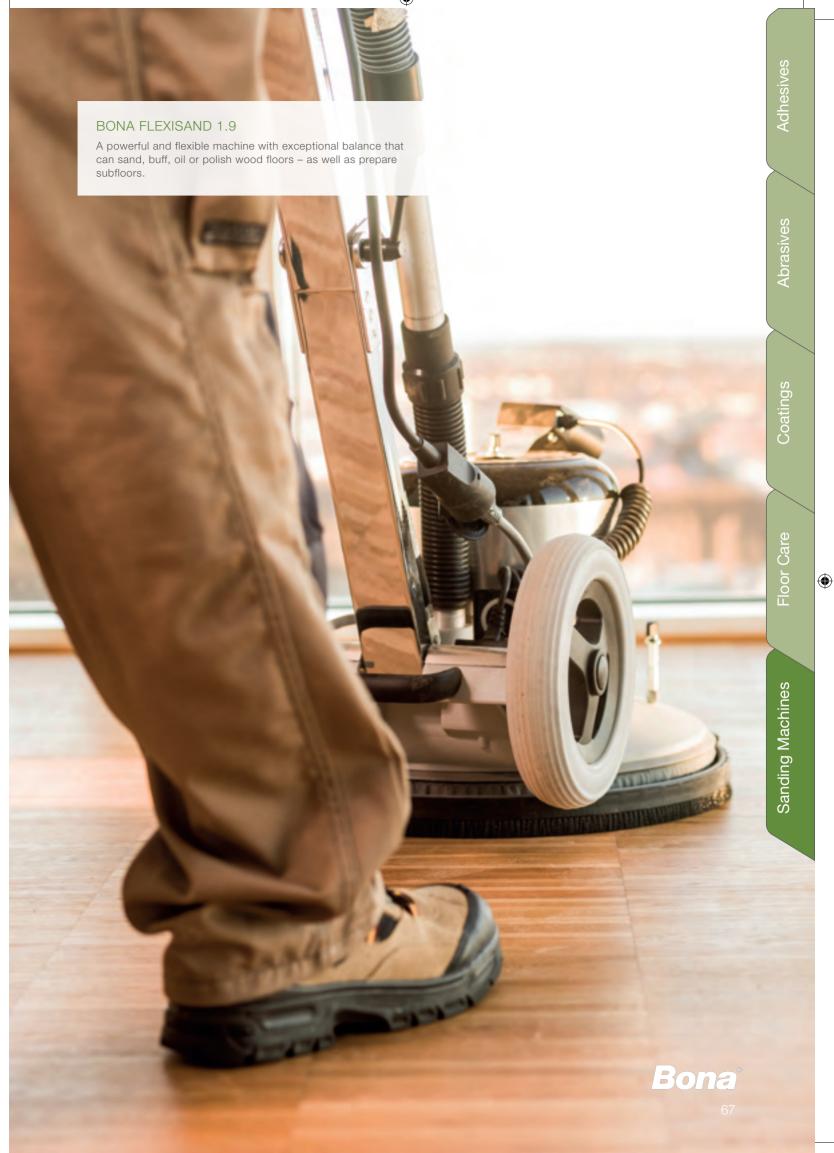

(





Sanding Machines

Bona FlexiSand System Type Article number Power Volt / Hertz

Bona FlexiSand



A powerful and flexible machine with exceptional balance that can sand, buff, oil or polish wood floors – as well as prepare subfloors. This robust, single speed machine features an interchangeable disc system and ergonomic design. A fold down handle and big wheels make for easy transport and storage. Supplied complete with Bona Power Drive Plate. Optional extras including lights, extra weight and vacuum are available at extra cost. Available with 1.9 kW motor.

Key Benefits:

- Powerful, single-speed motor
- Easy and ergonomic operation
- Foldable handle reduces space required during transportation
- Big wheels for easy transportation
- Connects with the Bona DCS for dust-free sanding

Technical Data:

Single disc: 407 mm Power drive disc: 150 mm Total weight: 45 kg/50 kg

Abrasive hub speed (unloaded): 147 rpm

407 mm	AMO310002.4	1.9 kW	230 V / 50 Hz
--------	-------------	--------	---------------

Bona FlexiSand 1.9kW with PowerDrive Connect, includes Power Drive Plate, Sanding Discs and Intermediate Pads.

407 mm	FLEXSPECIAL	1.9kW	230 V / 50 Hz

Type Article Number Pack Size Packs/Box

Bona Power Drive



The innovative Bona Power Drive creates a new dimension for sanding down to bare wood. Using a direction-free sanding technique, the drive combines excellent performance with easy operation. Four rotating discs (150 mm) sand closely to walls, which minimises edge sanding. The geared plate drives the rotating discs resulting in increased power for aggressive sanding of floors back to bare wood when used in combination with Bona 8700 Ceramic Abrasives.

For a really great finish, use Ceramic 50 grit – Zirconium Mix 80 grit – Zirconium Mix 120 grit.

Standard Power Drive	407 mm	ASO312540	1	1
PowerDrive Connect + Skirt Upgrade		ASK3199940991	1	1
PowerDrive Connect Sanding Discs		ASK3199941010	Set of 4	1
PowerDrive Connect Tynex Brushes		ASK3199941020	Set of 4	1
PowerDrive Connect Metal Brushes		ASK3199941030	Set of 4	1
Extra Weight for FlexiSand 1.9	2 x 7 kg	ASK3199940008	1	1
Bona Steel Plates		AX0003562	Set of 4	1
Working Light		ASO319000	1	1
Bona Intermediate Pad	150 mm	AAS472200008	4	4









Sanding Machines

Bona FlexiSand System	Туре	Article Number	Pack Size	Packs/Box
Bona Quattro Disc	Four-plate disc for an excellent surface finish. Perfect for reducing and smoothing out marks and rotational scratches from edger machines. The Bona Quattro Disc will opti your sanding results and is perfectly balanced for high efficiency combined with smoot results.			
	150 mm	ASO312530	1	1
Bona Concrete Disc	Basic drive plate for fitting different types of sanding segments. Magreasy change of segments.			
100	407 mm	ASO312570	1	1
Diamond Segment	nent For the removal of sinter and laitance layers and the preparation of concrete			crete surfaces.
		ASO312571	Set of 4	1
PCD Split Segment	For the removal of	of polyurethane, thin adhesiv	re residues or paint.	
		ASO312582	Set of 4	1
PCD Maxi Segment	For the removal of of thick adhesive residues, bitumen, epoxy and carpet foam.			
		ASO312581	Set of 4	1
Bona Tampico Brush	A 16" soft-bristle brushing attachment for the Bona FlexiSand DCS Buffer or Bona Power Drive, to thoroughly clean the wood grain after the final sanding and screening and before staining or sealing. Helps remove the fine dust from the soft grain of wood prior to sealing, staining, or oiling. In addition, it's an excellent tool post-wire-brushing to achieve a cleaner, more textured appearance. Key Benefits: Soft bristles thoroughly remove fine dust from the grain of the wood after sanding Greatly reduces grain raise and provides a much smoother finish Fits a standard 16" buffer or Bona Power Drive			
	16"	ASK3100030716		1
Bona Box L	Convenient, hard and sanding discs	plastic container for storing B s securely.	ona FlexiSand accessor	I ries such as drive plates
		AST237	1	1
Bona Box XL	Convenient, hard plastic container for storing Bona FlexiSand accessories such as drive plates and sanding discs securely.			
-		AST437	1	1
Bona Box Trolley	Trolley with large	wheels for easy transportatio	n of Bona Boxes.	
6		AST999	1	1





Introducing Bona Brush Technology

Bona's unique Brush Technology features the innovative Bona PowerDrive Connect click-on mount to produce dramatic new looks on existing wood floors or to abrade and sand down to bare wood for a full renovation.

From two-tone contrasts, to eye-catching, contemporary 2 colour effects, when combined with Bona's range of oils and finishes, the possibilities are endless.

Creating texture

Bona Brush Technology brushes down deep between the grain. This enhances the texture of the wood, creating floor effects with a difference.

The system works on planks and on parquet blocks.





(





How it works

Bona's new Brush Technology involves wire brush attachments that remove the soft wood between the hard wood, adding depth and texture to the wood's surface.

This allows the coloured oil to settle between the grain, creating a 2-dimensional effect and enhancing the natural pattern of the wood.








1. Flat surface

2. Brushed surface

3. 2-dimensional surface

Follow Bona's recommended abrading and brushing sequence for optimal results.



Stunning unique effects

Bringing out the grain

Counter-rotating cylindrical wire heads brush away the soft wood, creating ridges between the wood's grain to expose the natural pattern. This creates depth and texture.

Simple attachment

Brushes and sanding discs are mounted onto the Bona PowerDrive Connect, locked into place with just an easy click.

PowerDrive Connect for flexibility

Bona PowerDrive Connect gives you the unique flexibility to perform brushing, traditional abrading or bare wood sanding by simply switching the attachments. All these in just one driving plate solution.

Bona FlexiSand 1.9

For easy, direction-free brushing and sanding, the Bona PowerDrive Connect is to be used together with Bona FlexiSand 1.9. With its powerful 1.9 kW motor it delivers superb results.

Bona SupraFlex

Use the Bona SupraFlex edge tool for brushing and sanding right up to the edge and for other hard to reach areas.



Cylindrical wire heads brush away soft wood



Click-on mount with strong hexagon fitting



Dynamic cog system for sanding power







Sanding Machines

Other Machines & Accessories

Туре

Article number

Power/Pack Size

Volt/Hertz/ Packs per Box

Bona Mini Buffer



The Bona Mini Buffer is a single-speed buffing machine for buffing wooden floors and easier fine sanding of lacquered surfaces. Smooth running, features an anti-vibration system for ease of use.

Key Benefits:

- Compact and lightweight
- Extremely easy to use
- Perfect for the maintenance of all hard floors

Technical Data:

Optimal pad size: 330 mm Disc speed: 1450 rpm

Weight: 13 kg

300 mm

AMC718010

290 W

230 V / 50 Hz

Bona SupraFlex



Bona SupraFlex is an all-in-one sanding machine for the sanding and brushing of edges. The perfect sanding companion to the Bona Power Drive NEB, Bona SupraFlex will help you with those hard to reach areas.

Key Benefits:

- Powerful 1400 W motor
- Stepless speed selection (600-2100 rpm)
- Low height easy to reach under stairs and radiators etc
- Dust cover allows connection to Bona DCS for dust free sanding
- Easy to change between sanding disc and brushes
- Low noise

155 mm

AMF100001

1.4 kW

230 V / 50 Hz

Cup Brush 120

Metal brush for use with Bona SupraFlex.



120 mm ASF100200 1



Volt / Hertz

(



Vacuum Systems

Sanding Machines

Type

vacadin oyotomo	.,,,,,	7 11 11 11 11 11 11 11 11 11 11 11 11 11	1 0 11 0 1			
Bona FlexiVacuum	Bona FlexiVacuun with the Bona Flex	n is an on-board vacuum esp xiSand.	ecially designed to be u	sed in combination		
X	Bona FlexiVacuum is a part of Bona's dust-free sanding offer, for an improved working and living environment. It is classified Class M according to EN 60 335-2-69, ensuring that 99,9% of dust particles are removed by the filters.					
	Key Benefit:		Technical Data:			
	health hazardor • Electrical powe	ng conditions - M Classified, us dust EN 60335-2-69 r outlet t in case of too low air flow	Collection capacity (I wood dust Air flow: 171 m³/hour Filter: Polyester filter ca Hose aperture: 35 mm	artridge Class M		
		ASK3199940901	800 W	230 V / 50 Hz		

Article number





The Bona DCS 70 is a powerful vacuum unit for dust-free sanding. Its two-step cyclonic separation and unique filter design effectively contains dust within the machine, even changing the dust bag can be done completely dust-free. With the DCS 70 connected to the sanding machine there is no need to seal off connecting rooms or cover paintings and bookshelves and the environment will be a lot healthier and cleaner to work in compared to using regular dust bags on the sanding machine.

Key Benefits:

- Dust-free sanding
- Ergonomic design and convenient transportation
- Low power consumption
- Quick and dust free swap of dust bags
- Unique seamless dust bag solution using Longopac

Technical Data:

Power

Weight: 38 kg

Dimensions: $800 \times 600 \times 1200 \text{ mm}$

Dust holding capacity: $70\,\mathrm{L}$

Airflow with 7.5 m hose: 250 m³ per hour **Coarse filter:** Conical folded polyester filter,

1 m³

Fine filter: class H 13 (99.996%, 0.3 μ M),

0.66 m³

Hose aperture: 35 mm diameter **Hose length:** 7.5 m including connection

adapters

AMO530005GB 1400 W 230 V / 50 Hz

Bona DCS 25



A compact and portable vacuum unit for dust-free sanding. Offering all the benefits of the larger Bona DCS 70, the Bona DCS 25 is compatible with all Bona sanding machines.

Key Benefits:

- Compact and portable
- Class H 13 HEPA filtration
- Filter cleaning during operation
- Electrical outlet with automatic start/stop
- Beeper alarm in case of too low air flow
- Soft start motor

Technical Data:

Weight: 20kg

Dimensions: $550 \times 500 \times 1070$

Dust holding capacity (bag): Approx.16

litres wood dust **Motor:**1450W, 230V, 6A

Air flow: 194cubic metres per hour **Pre-filter:** Teflon coated membrane filter **HEPAfilter:** Class H 13 (99.996%, 0.3µm),

.1sq.m

Hose aperture: 35 mm diameter

Length of hose: 7.5 m

AMO540000 1450 W 230 V / 6 A







Sanding Machines

 Vacuum Systems
 Type
 Article number
 Power
 Volt / Hertz

Bona DCS 50



The DCS 50 is a powerful and versatile industrial vacuum cleaner developed to handle both very fine and health hazardous dust that is possible to convert to a wet vacuum in a minute. The Bona DCS 50 is an excellent companion whether you are sanding wood floors or renovating resilient flooring. Equipped with a 2-step automatic filter cleaning which ensures sustained high suction power. Large wheels for good maneuverability and foldable handle for easy transportation.

Key Benefits:

- Certified filtration efficiency of 99.9% (M Class)
- High capacity for dust collection 50L
- Automatic filter clean option
- Compact design for convenience
- Can be used as a wet vacuum
- Automatic 'stop-start' electrical outlet for powering machines

Technical Data:

Weight: 19kg

Dimensions: $640 \times 370 \times 1045$ mm Dust holding capacity : 50 LHose aperture: 35mm in diameter

Hose length: 5m

Dust Bags	Article No.	Units/Box
Fleece Dust Bag for Bona DCS 50	AS3628893540	Pack of 5
Fleece Dust Bags for Bona DCS 25	ASO540001	Pack of 10
LongoPac Dust Bags for Bona DCS 70	ASO539500	Pack of 4
Cloth Bag – edgers	ASO992002	1
Cloth Bag – belt sanders (no zip)	ASO991000	1
Disposable Fleece Bag 700 x 350mm	ASO991012	1
Disposable Fleece Bag 600 x 300mm	ASO992011	Pack of 2
S20 Dust Bag	ASC020430	Pack of 10
FlexiVac Dust Bags	ASO994011	Pack of 5







Bona Resilient System

A new system to renovate Resilient flooring!

When replacing the 300 m² linoleum floor of a children's kindergarden in Germany, the demands were a safe, healthy environment that would be ready for action after a weekend.

Instead of a traditional method, which involves removal of the old floor, sanding of the subfloor, priming, levelling and finally installation and welding of the floor, which would take 3 professional floor contractors 6 days, the Bona Recoating

Renovate, don't replace

- Offer new services
- ✓ Increased profitability per m²

method took just 3 days. This resulted in savings, not only on downtime, but also on costs with the reduction of man hours from 144 to just 72 hours.

New installation

Bona Recoating

72 hours 144 nours

Transform worn floors and change look and colour

Add a recoat of Bona Pure lacquer over the top for protection and durability and you've got a new floor that's ready for any challenge.

For sports floors, design effects or creative looks, our Bona Care Program enables you to add signs, symbols or even change the colour of your resilient surface.

- ✓ Extended floor lifetime
- ✓ Endless design possibilities



Less environmental impact

Refinishing resilient floors can offer up to 92% reduction in carbon footprint versus replacing. Additionally, there is a minimum of 90% savings in resources when renovating compared to replacing the floor. Read the full study at Bona.com.

- Huge savings in resources and reduction of carbon footprint
- ✓ Improved floor hygiene



Find out more at bona.com



Bona®

75



Passion for floors

Established in 1919, Bona is a world leading innovator with a passion for the development of unique systems to treat wood and other hard floors.

Through our subsidiaries and distributors we have a local presence in more than 90 countries, enabling us to work closely with floor owners as well as the professionals who use our products.





Bona Limited 8 Thornton Chase Linford Wood MILTON KEYNES Buckinghamshire MK14 6FD Tel 01908 525 150 Fax 01908 311 677 info.uk@bona.com

What 3 words //unsettled.boss.headless

Email address for orders only: ukorders@bona.com



From May 2022

bona.com

