



Bona Classic Prime and Traffic HD,  
Citizen M Hotel, London Bankside

# PRODUCT CATALOGUE 2025



**Bona**<sup>®</sup>



Introducing  
The World  
of Bona

## Introduction

Our History and Milestones	4
Passion for Wood Floors	5
Bona Technical Support	6

## Adhesives

Introduction to Bona Adhesives	8
Damp Proof Membranes/Moisture Barriers	9
Primers/Levellers	10
Specialist Adhesives	11
Reactive Silane-Based Adhesives	12
Tools and products for installation and repair	14
Bona Adhesives Specification Guide	15

## Abrasives

Introduction to Bona Abrasives	16
Ceramic Abrasives	17
Zirconium Mix Abrasives	20
Silicon Carbide Abrasives	22
Aluminium Oxide Abrasives	24
Specialist Abrasives	26
Screens/Cleaning Pads	27
Recommended Sanding Methods	28

## Coatings

Introduction to Bona Coatings	30
Primers	31
Lacquers	33
Bona Lacquers – Durability Scale	37
Bona SuperSport	38
Oils	42
Fillers	48
Tools for use with Coatings	50

## Floor Care

Introduction to Bona Floor Care	54
Deep Clean System	55
Commercial Cleaners for Lacquered Floors	56
Commercial Cleaners for Oiled Floors	57
Retail Cleaning Products	58

## Sanding Machines

Introduction to Bona Sanding Machines	64
Bona Belt and Expansion Sanders	65
Bona Sanders	66
Bona FlexiSand System	67
Introduction to Bona Brush Technology	71
Other Machines & Accessories	73
Bona Vacuum Systems	74
Bona Dust Bags	75
Bona Resilient System	78



From coffee shop to global innovator, Bona has been family owned from the very start. Bona's founder, Wilhelm Edner, originally owned a small grocery shop in Malmö, Sweden where he sold coffee and other products including 'bonwax' (floor polish). Edner quickly realised the potential of bonwax and, in 1919, incorporated a new company – Bona AB – to develop it further. Now, more than 100 years later, Bona is a leading player in the global wood floor industry and has a wealth of knowledge focused on bringing out the beauty in floors.

BRINGING OUT  
THE BEAUTY IN FLOORS  
SINCE 1919

**Bona**®

Bona is still owned by the Edner family and remains committed to developing, improving and finding new innovations not just for the treatment of wood floors but also for other types of flooring such as stone, tile, laminate and resilient.

Today, Bona has 600 employees and is present in 90 countries through subsidiaries and distributors.



## Milestones

- |   |   |
|---|---|
| 1919 Bona AB is established in Malmö, Sweden                      | 2009 Bona Novia awarded EU Flower   |
| 1953 Bona's first subsidiary is established in Germany            | 2010 Bona stops sales of solvent-based adhesives in the EU                  |
| 1959 Bona moves to new premises in Malmö                          | 2010 Bona stops sales of solvent-based floor care products                  |
| 1979 Bona introduces waterborne coatings                          | 2012 Bona Traffic HD is launched – a new generation of waterborne lacquers  |
| 1981 Bona starts producing UV-finishes                            | 2013 Bona Certified Contractor Scheme launched across Europe                |
| 1987 A new subsidiary is established in the USA                   | 2014 New low VOC Oil System introduced                                      |
| 1999 A new subsidiary is established in the UK                    | 2014 Bona announces partnership with K&T and new sanding machine range      |
| 2000 Bona starts production of the new range of sanding machines  | 2015 Launch of Bronze, Silver & Gold Floor Treatment Programme              |
| 2000 Bona's Asia Pacific subsidiary is established in Singapore   | 2016 Launch of overcoatable Bona Craft Oil 2K                               |
| 2001 Bona becomes ISO 14001 certified                             | 2017 Launch of Bona FlexiSand 1.9   |
| 2001 Bona invests in two new plants in Sweden                     | 2017 Launch of Bona Brushing System   |
| 2002 Bona acquires a new plant in Pueblo, USA                     | 2017 Launch of Bona Titan adhesive based on Titanium Technology             |
| 2004 Bona offices established in Panama and Shanghai              | 2018 Launch of Bona Mega One lacquer  |
| 2005 Introduction of dust-free sanding and silane-based adhesives | 2018 Launch of Resilient Floor Care Program                                 |
| 2006 Opening of plant in Monroe, USA                              | 2019 Bona celebrates 100 years of bringing out the beauty in floors!        |
| 2007 Opening of UV-coating plant in China                         | 2020 Introduction of ergonomic UX sanding machine range                     |
| 2008 BonaKemi becomes Bona  | 2022 Launch of Bona Traffic HD Raw  |
| 2008 Full range of silane-based adhesives introduced              | 2023 Launch of unique Traffic GO – Pre mixed 2 component in a single bottle |
| 2009 Bona stops producing solvent-based finishes in the EU        | 2024 Launch of Mega EVO – next generation 1K lacquer with VOC levels <3%    |



# Passion for Wood Floors

## The Bona System and Lifetime Support

The Bona System contains everything needed to bring out the best in wood floors. Our product range includes abrasives, sanding machines – including a dust free sanding system, adhesives, coatings and products for the ongoing maintenance of all types of wood floor in domestic, commercial or public environments.

Together these products combine to deliver Bona's promise of 'Lifetime Support' to architects, contractors and floor owners throughout the lifetime of the floor.



## Low VOC Formulations

Since 1997, the Association for the Control of Emissions in Products for Floor Installation, Adhesives and Building Materials (GEV) certifies low-emission construction products with the quality mark GEV EMICODE®. Bona lacquers were the first in the industry to be awarded the EMICODE EC1 trademark. Bona's reactive adhesives also carry this important classification.



All adhesives and surface treatments used in new installations in Germany have to meet the DIBt standard that governs the safety of indoor air quality. Where indicated in this brochure, Bona adhesives and coatings meet this stringent certification.



## Greenguard

Our lacquers, primers and retail cleaning products are GREENGUARD certified.

The globally recognised GREENGUARD Certification is part of UL Environment, a business unit of UL (Underwriters Laboratories). GREENGUARD Certification helps manufacturers create, and buyers identify, interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used.



## Phasing out chemicals

We are actively phasing out chemicals considered unhealthy to people and the environment.

This process is occurring on a product-by-product basis, as the specific ingredients of our formulas must be carefully balanced to maintain function and quality.

We have conducted extensive work to phase out PFAS from some of our products. For many of these products, ingredients have been changed to alternatives that do not contain PFAS.

Our work will continue with the goal of completing the PFAS phase-out for all the products concerned.

Our recently launched lacquers, Bona Traffic GO and Bona Mega EVO are testament to our dedication in reducing PFAS more commonly known as forever chemicals.





# Technical Support

**For architects:** Whether you are looking for extra slip-resistance in a school corridor, extreme durability for a busy airport environment or a non-reflective surface for a new home flooded with light, the Bona technical team will help you identify the correct specification.



Bona is a RIBA approved CPD provider and offers seminars on the specification of finishes for wood floors, installing wood floors using adhesives and the maintenance and recoating of resilient floors.

Bona products can be specified via NBS Source.

**For contractors:** During working hours technical advice is always available at the end of the telephone or we can arrange a site visit to help with tricky installations.

## Technical documents

Technical and safety data sheets for all our products, together with machine manuals and application guides can be downloaded at [bona.com](http://bona.com)

## Samples

Wet and dry samples of our coatings are available on request. Please contact our technical department.

## Training for contractors and distributors

We offer two levels of training to contractors – an in-depth two day course for experienced contractors leading to ‘Bona Certified Contractor’ status and a one day sanding and finishing course for those new to the industry. We also offer free product training for our distributors.



Bona Limited HQ, Milton Keynes, Buckinghamshire



Bona is represented throughout the UK and Ireland by a network of specialist distributors. Contractors can search for local suppliers at [bona.com](http://bona.com). If you have any questions about the supply, performance or application of Bona products, please don't hesitate to call us – we're here to help you.

Technical Manager

**Alec Stacey** | 01908 525 161  
07866 719 997

E-mail: [alec.stacey@bona.com](mailto:alec.stacey@bona.com)



Technical Assistant

**Ian Smith** | 01908 525 162

E-mail: [ian.smith@bona.com](mailto:ian.smith@bona.com)



Technical Sales

**Stephen Cross** | 07493 868 293

E-mail: [stephen.cross@bona.com](mailto:stephen.cross@bona.com)

Northern England, Scotland, North Wales,  
Northern Ireland, Republic of Ireland



Technical Sales

**Geoff Hewett** | 07792 848 315

E-mail: [geoff.hewett@bona.com](mailto:geoff.hewett@bona.com)

London (South of Thames), South East



Technical Sales

**Stuart Claxton** | 07377 589 431

E-mail: [stuart.claxton@bona.com](mailto:stuart.claxton@bona.com)

London (North of Thames, East Anglia)



Technical Sales

**Charles Norris** | 07775 844 581

E-mail: [charles.norris@bona.com](mailto:charles.norris@bona.com)

East & West Midlands, Central &  
South Wales



Sales Manager – Pro Products & Resilient

**Tony Peak** | 07775 844 519

E-mail: [tony.peak@bona.com](mailto:tony.peak@bona.com)



Marketing Manager

**Leanne Garvie** | 01908 525 150  
07940 554 467

E-mail: [leanne.garvie@bona.com](mailto:leanne.garvie@bona.com)



To obtain Bona products in the Republic of Ireland,  
please contact Floor Design, Dublin.

Tel: 00 353 (1) 623 4157

E: [sales@floordesign.ie](mailto:sales@floordesign.ie)

W: [floordesign.ie](http://floordesign.ie)



Follow us on Social Media:



**Bona**<sup>®</sup>



# Adhesives

Bona has developed a range of adhesives which delivers the right combination of strength and elasticity for all types of wood floor installation. Find out more about the new smart pack adhesive on page 11 and 12 for easier transport and reduced plastic waste.

Technical and safety data sheets for all products are available for download at [bona.com](https://bona.com) or speak to a member of our technical team for more information.

**Bona**<sup>®</sup>









# Adhesives

Adhesives

## Damp proof membranes/moisture barriers

	Article Number	Pack Size	Packs/Box
 <p><b>Bona R540</b></p> <p>A one-component, polyurethane primer and moisture suppressant for absorbent and non-absorbent substrates. Suitable for damp proofing concrete floors and substrates up to 80% RH.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Moisture inhibiting</li> <li>• Excellent penetration properties</li> <li>• One-component and ready to use</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> (at 20°C/60%RH) 1 hour before the installation of wood floors, 24 hours before using Bona Silane based adhesives</p> <p><b>Coverage:</b> Single coat application when used as a primer 100-150g/m<sup>2</sup>. For multiple coats as a moisture suppressant 250-350g/m<sup>2</sup></p> 	BR54002200M1BO	6 kg	3
 <p><b>Bona R590</b></p> <p>A one-component, silane-based primer for sealing residual moisture in cement screeds or concrete (up to 90% RH) prior to installing wood flooring. Has a reinforcing effect where subfloors are slightly weak. Compatible with all Bona silane and polyurethane adhesives and Bona levelling compounds.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Reinforcing effect</li> <li>• Single coat trowel application</li> <li>• Plasticiser-free</li> <li>• Solvent and water-free</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> (at 20°C/60%RH) 4-6 hours</p> <p><b>Coverage:</b> Single coat of 500-1000g/m<sup>2</sup></p> 	BR59002300M1BO	8 kg	1

Abrasives

Coatings

Floor Care







Sanding Machines





# Adhesives

## Primer/Levellers




		Article Number	Pack Size	Packs/Box
 	<p><b>Bona H600</b></p> <p>A cementitious, acrylic polymer enhanced, self-smoothing, rapid hardening levelling compound for application below most types of wood flooring. Can also be used below resilient floor coverings, textile floorings and solid cork tiles. Bona H600 can be applied up to 20 mm in one application. If applied on mastic asphalt, do not exceed a thickness of 10mm.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Self levelling</li> <li>• Self smoothing</li> <li>• Low shrinkage and tension</li> <li>• Light foot traffic after 1.5-2 hrs</li> </ul> <p><b>Technical Data:</b></p> <p><b>Coverage:</b> 1.4 kg per m<sup>2</sup></p> <p><b>Layer thickness:</b> 1-20 mm</p> <p>Wood floor can be installed after 12-24 hours</p>	BH60042060DE	25kg	1
 	<p><b>Bona D501</b></p> <p>A primer designed for use with Silane based adhesives. It is suitable for absorbent and non-absorbent substrates (with the exception of magnesium industrial floors) and for chipboard panels and similar substrates.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Vapour permeable</li> <li>• Solvent-free</li> <li>• Very quick drying</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying time:</b> (at 20°C/60%RH) 1-2 hrs depending upon absorbency of substrate</p> <p><b>Coverage:</b> 100-150 g/m<sup>2</sup></p>	BD50102000MLBO	5 L	3
 	<p><b>Bona D515</b></p> <p>A one component solvent free, primer concentrate for multipurpose use. Can be used for the preparation of absorbent and non-absorbant substrates and on old, solid and water resistant adhesive residues prior to the use of Bona leveling compounds. Due to the high bonding strength Bona D515 can also be applied undiluted over dense, non absorbent and wooden substrates or old, well bonded sound floor coverings like tiles or PVC.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Solvent Free</li> <li>• Multifunction use</li> <li>• Can be used undiluted or diluted. Check product TDS for use.</li> <li>• Very Low emission EC1</li> <li>• Suitable for under floor heating</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying time:</b> 0.5 to 3 hours. On Wood or Calcium Sulphate 24 hours</p> <p><b>Application:</b> Roller or brush</p> <p><b>Coverage:</b> 40-150g/m<sup>2</sup> (concentrate)</p> <p>Check data sheet for more details</p>	BD51502400MLBO	10 L	1



# Adhesives

Adhesives

## Specialist Adhesives


	Article Number	Pack Size	Packs/Box
	Bona R200 Liquid repair material for filling hollow spots in parquet floors as well as reattaching loose elements and boards. Once injected the material expands and effectively fills up the hollow space. <b>Key Benefits:</b> <ul style="list-style-type: none"><li>• Simple solution to a difficult problem</li><li>• Excellent adhesion properties</li><li>• Contains no water or solvents</li></ul> <b>Technical Data:</b> <b>Base:</b> 1-comp Polyurethane <b>Drying time:</b> 4 hrs	530 g	6
 	Bona Vertical Bona Vertical is a ready to use, fast drying, silane based construction adhesive suitable for the installation of stair nosings, skirting boards, door thresholds, carpet gripper etc. Hazard and solvent free. <b>Key Benefits:</b> <ul style="list-style-type: none"><li>• Quick grab and hardening</li><li>• High strength</li><li>• Excellent adhesion properties</li></ul> <b>Technical Data:</b> <b>Base:</b> 1-comp silane modified <b>Density:</b> 1.7 g/cm <sup>3</sup> <b>Application:</b> Adhesive gun <b>Density:</b> 1.6 g/cm <b>Open time:</b> 10 min <b>Application of load:</b> 4-8 hrs <b>Curing time:</b> 24 hrs	310 ml	12

Abrasives

Coatings

Floor Care

Sanding Machines

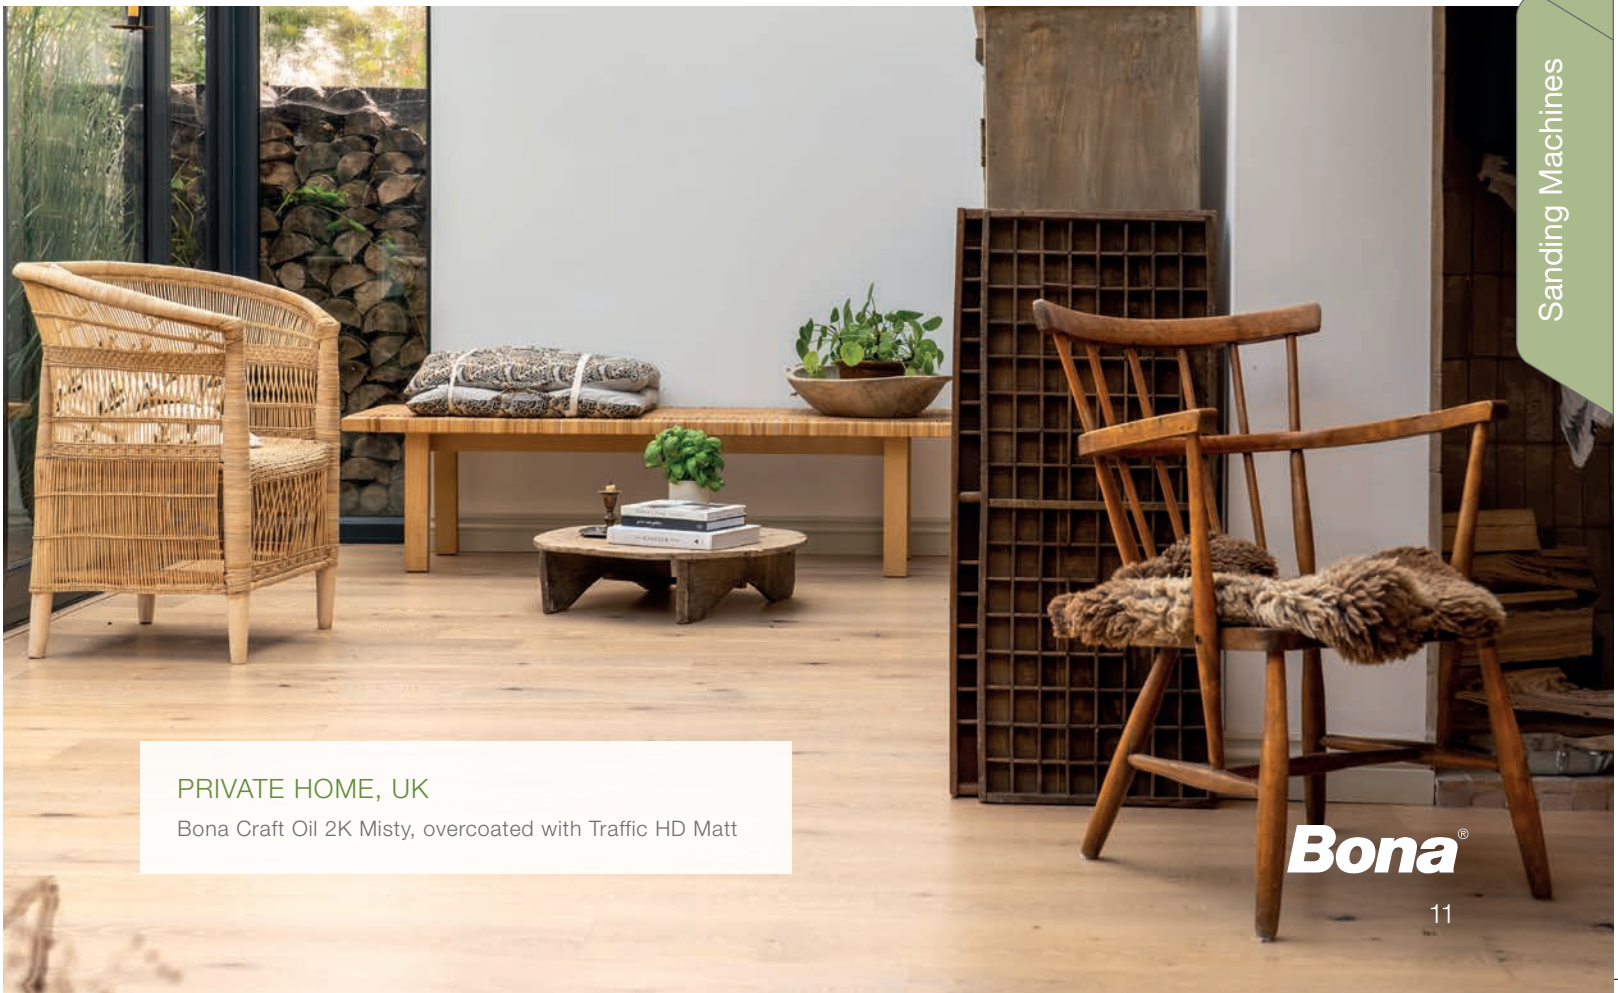

PRIVATE HOME, UK

Bona Craft Oil 2K Misty, overcoated with Traffic HD Matt

**Bona**<sup>®</sup>



# Adhesives

## Reactive Silane-based Adhesives








	Article Number	Pack Size	Packs/Box
 <p><b>Bona R848</b></p> <p>Elastic adhesive for wood floors. A good value alternative for installing engineered flooring and smaller sized and dimensionally stable solid flooring. Relieves tension on subfloor. High initial bonding strength, reducing the potential for "hollow spots".</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Easy to spread and work with</li> <li>• Requires no primer</li> <li>• Free from water and solvents, causes no wood swelling</li> <li>• Allows load after 24 hrs</li> <li>• Suitable for under floor heating</li> </ul> <p><b>Technical Data:</b></p> <p><b>Base:</b> 1-comp silane modified  <b>Density:</b> 1.6 g/cm<sup>3</sup>  <b>Colour:</b> Beige  <b>Application:</b> Notched trowel  <b>Open time:</b> Approx. 30 min  <b>Coverage:</b> 850-1250 g/m<sup>2</sup></p>	BR84802800M1BO	15 kg	1
 <p><b>Bona R848T</b></p> <p>Elastic adhesive for wood floors. A good value alternative for installing engineered flooring and smaller sized and dimensionally stable solid flooring. Relieves tension on subfloor. High initial bonding strength, reducing the potential for "hollow spots". Bona R848T is a thicker adhesive than Bona R848 and is ideal for gun application.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Requires no primer</li> <li>• Free from water and solvents, causes no wood swelling</li> <li>• Allows load after 24 hrs</li> <li>• Suitable for under floor heating</li> </ul> <p><b>Technical Data:</b></p> <p><b>Base:</b> 1-comp silane modified  <b>Density:</b> 1.6 g/cm<sup>3</sup>  <b>Colour:</b> Beige  <b>Application:</b> Notched trowel  <b>Open time:</b> Approx. 30 min  <b>Coverage:</b> 850-1250 g/m<sup>2</sup></p>	BR848T5601M1BO	1 kg	20
	BR848T2200M1BO	6 kg	3
	BR848T6809M1BO	9 kg	2
	BR848T2800M1BO	15 kg	1
 <p><b>Bona Quantum</b></p> <p>A new generation silane-based adhesive for all round use. Can also be used as a moisture barrier. The formula delivers outstanding strength that evolves over time to provide the ideal strength once set. Combines the benefits of hard and hard-elastic adhesives in a single product. When used as a moisture barrier Bona Quantum should be applied using Bona Trowel Plus.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Powerful titanium crosslinking</li> <li>• Floor sanding possible after 12h</li> <li>• Integrated moisture barrier</li> <li>• Suitable for under floor heating</li> <li>• Can be used on metal surfaces</li> </ul> <p><b>Technical Data:</b></p> <p><b>Coverage:</b> 2000-2200 g/m<sup>2</sup>  <b>Coverage as adhesive and moisture barrier:</b> 2.0 to 2.2 kg/m<sup>2</sup></p>	BRQUA02800M1BO	15 kg	1



# Adhesives

Adhesives

## Reactive Silane-based Adhesives

	Article Number	Pack Size	Packs/Box	
  	<b>Bona Quantum T</b> Offering all the great benefits of Bona Quantum, but in a thicker formulation.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>• Powerful Titanium crosslinking</li> <li>• High viscosity</li> <li>• Integrated moisture barrier</li> <li>• Suitable for under floor heating</li> <li>• Can be used on metal surfaces</li> </ul>			<b>Technical Data:</b> <b>Coverage:</b> 850-1500 g/m <sup>2</sup> <b>Coverage as moisture barrier:</b> 2000-2200 g/m <sup>2</sup>
		BRQUAT5601M1BO	1 kg	20
		BRQUAT2206M1BO	6 kg	3
		BRQUAT6809M1BO	9 kg	2
	BRQUAT2800M1BO	15 kg	1	
  	<b>Bona Titan</b> Taking wood floor bonding to a new level, Bona Titan is based on Bona's revolutionary Titanium technology and quadruple crosslinking formulation that offers ultimate durability and the fastest possible bonding. Ideal for the installation of very wide or long solid planks. Its use removes movement, providing extra security and strength.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>• Ultimate durability</li> <li>• Solvent-free, very low VOC</li> <li>• Suitable for all wood installations</li> <li>• High shear strength</li> <li>• No hollow spots</li> <li>• Long term stability</li> <li>• Fast initial bonding and curing saves time</li> <li>• No primer required</li> <li>• Extremely high grab for easy application</li> <li>• Suitable for underfloor heating</li> </ul>			<b>Technical Data:</b> <b>Base:</b> Silane modified prepolymer <b>Density:</b> 1.7 g/cm <sup>3</sup> <b>Colour:</b> Beige <b>Application:</b> Notched trowel <b>Open time:</b> Approx. 30 min <b>Coverage:</b> 850-1500 g/m <sup>2</sup> <b>Coverage as moisture barrier:</b> 2000-2200 g/m <sup>2</sup>
		BRTIT02800M1BO	15 kg	1
	<b>Applicator gun for 1K sausages</b> For the application of Bona R848T and Quantum 1kg adhesives			
		Manual	AT32042000	1
	<b>Bona OptiSpread UX</b> Battery-powered adhesive applicator for fast and ergonomic application of Bona 9 kg adhesives sausages.			
		AT32046061	9 kg Foil Bags	1

Abrasives








Coatings

Floor Care

Sanding Machines



## Tools and products for installation and repair

	Type	Article Number	Pack Size	Packs/Box
	Trowels			
	For the application of Bona adhesives and moisture barriers. The 500g 180mm A3 trowel should be used for the application of Bona R590 moisture barrier. See individual product data sheets for coverage rates. When using Bona Quantum as a moisture barrier, please apply using Bona Trowel Plus. Refer to previous page for further information.			
	500 g 180mm A3	AT31400280		1
	850 g coarse B3	AT31402180		1
	1000 g coarse B10	AT31404180		1
	1250 g coarse B13	AT31406180		1
	1500 g coarse B16	AT31410180		1
	Bona Trowel Plus			
	Trowel for use with Bona Quantum and Bona Quantum T when used as a moisture barrier, allowing the application of adhesive and moisture barrier layer in the same stroke.			
		AT31400170		1
 	Oak Lamellas			
	Untreated white oak lamellas for making repairs. 'Nature' grade, small knots may occur.			
		AT32901201	1 m <sup>2</sup>	40 pieces
	Liquid Cork			
	Liquid cork for filling gaps.			
		AX34009000	500ml	1
 	U300 Sound Suppressing Underlay			
	Sound suppressing matting made of cork and PUR foam granules for installation under wood, laminate and other flooring to reduce the transmission of sound from footfall. Can be fixed to the subfloor using Bona Quantum or Bona Titan. A low VOC, low flammability product.			
	Impact sound improvement:			
	ΔLW = 16 dB with 2mm under 10mm engineered parquetry			
	ΔLW = 18 dB with 2mm glued under 10mm parquetry block			
	ΔLW = 18 dB with 3mm glued under 16mm parquetry block			
ΔLW = 19 dB with 2mm glued under 10mm parquetry (2 layer)				
	2mm x 30m	AX36225002	1	1
	3mm x 20m	AX36225003	1	1
	5mm x 16m	AX36225005	1	1



## Bona Adhesives Specification Guide

Bona Adhesive	Typical Use
Bona R848	A high performance adhesive for the installation of engineered timber flooring. Can also be used for solid boards up to 190 mm wide.
Bona R848T	A higher viscosity version of R848 which feels thicker and has an improved initial grab that reduces the risk of hollow spots. The sausage pack offers an alternative for use in gun applicators, a longer shelf life and virtually no waste.
Bona Quantum	A true all rounder suitable for practically all types of wood flooring and subfloors. Bona Quantum can also be used as a moisture barrier on concrete slabs or cement screeds with a residual moisture content up to 5 CM -% or 95%rh. When used as a moisture barrier the product should be applied using Bona Trowel Plus.
Bona Quantum T	With a higher viscosity than Bona Quantum this formulation is optimised for application via cartridge gun or Optispread system.
Bona Titan	When you're faced with a special challenge – a unique project or a high value installation where the highest quality bonding is required – then it's time to turn to Bona Titan. An unbeatable bond and ideal for the installation of very wide or long, heavy boards.
Bona Vertical	Bona Vertical is a ready to use, fast drying, silane based construction adhesive suitable for the installation of stair nosings, skirting boards, door thresholds, carpet gripper etc. Hazard and solvent free.
Bona R200	An expanding polyurethane adhesive for filling hollow spots beneath installed flooring.



### Bona Smart-Packs

Bona are committed to reducing waste of both product and plastic. Bona Smart-Packs are compressible and use less plastic compared to buckets, resulting in minimal waste.

Get in touch with your Bona Rep for more details.

Adhesives

Abrasives

Coatings

Floor Care


Sanding Machines



# Abrasives

## Did you know?

1. Not all abrasives are the same!
2. Bona, in conjunction with Sia Abrasives, has developed a range of abrasives exclusively for use on wood floors.
3. Abrasives designed for metalworking will increase fibre tears and can cause adhesion problems if used on wood surfaces.
4. Choosing Bona abrasives will cut your abrasive spend, reduce time spent on site, extend the life of your sanding machines and deliver a high quality surface finish.



### **Ceramic 8700 Ceramic Discs/Belts**

For excellent removal of hard finishes




### **8600 Ceramic Green**

Highly aggressive, long lasting abrasive




### **Bona 8300 Zirconium Mix Discs/Belts**

Highly controlled scratch pattern and reduced fibre tear



### **Bona 8100 Silicon Carbide Discs/Rolls**

Heat resisting anti-static performance reduces clogging to a minimum



### **Bona 8500 Aluminium Oxide Belts**

Ideal for softer timbers



### **Bona Diamond Discs**

The ultimate finishing system





# Abrasives

Adhesives



Abrasives

Coatings

Floor Care

Sanding Machines

## Ceramic 8700 Platinum

	Type	Grit	Article number	Q/Box
 <p>For excellent removal of hard finishes</p>	<b>Bona 8700 Ceramic Belt</b>			
	Developed specifically for use on wood floors for the coarse sanding of hard lacquers like urea formaldehyde. Optimum surface quality is achieved when used in combination with Bona Zirconium Mix antistatic abrasives. The ceramic aluminium oxide grit delivers extreme high performance and long life.			
	200 x 750 mm	36	AAS469500363	5
	200 x 750 mm	50	AAS469500503	5
	250 x 750 mm	36	AAS469600363	5
	250 x 750 mm	50	AAS469600503	5
	<b>Bona 8700 Ceramic Disc</b>			
	100 mm discs designed for Bona Dual Edge.			
	100 mm	36	AAS472800365	25
	100 mm	50	AAS472800505	50
	125 mm discs designed for Bona Multidisc.			
	125 mm	36	AAS471600365	25
	125 mm	50	AAS471600505	25
	150 mm	36	AAS471700365	25
	150 mm	50	AAS471700505	25
	178 mm	36	AAS471800365	25
178 mm	50	AAS471800505	25	



# Abrasives

## Ceramic 8600 Green

	Type	Grit	Article number	Q/Box
	<b>Bona 8600 Ceramic Belt</b>			
	A combination of ceramic and aluminium oxide materials makes this abrasive extremely aggressive and highly productive. Compared to other competitive ceramic abrasives, Bona 8600 Green Ceramic Abrasives cut 30% faster and last up to 50% longer.			
	200 x 750 mm	36	AAS860700363	10
	200 x 750 mm	40	AAS860700403	10
	200 x 750 mm	50	AAS860700503	10
	200 x 750 mm	60	AAS860700603	10
	200 x 750 mm	80	AAS860700803	10
	200 x 750 mm	100	AAS860701003	10
	200 x 750 mm	120	AAS860701203	10
	250 x 750 mm	36	AAS860800363	10
	250 x 750 mm	40	AAS860800403	10
	250 x 750 mm	50	AAS860800503	10
	250 x 750 mm	60	AAS860800603	10
	250 x 750 mm	80	AAS860800803	10
	250 x 750 mm	100	AAS860801003	10
	250 x 750 mm	120	AAS860801203	10
	<b>Bona 8600 Ceramic Disc</b>			
	150 mm	36	AAS860300365	25
	150 mm	50	AAS860300506	25
	150 mm	60	AAS860300606	50
	150 mm	80	AAS860300806	50
	150 mm	100	AAS860301006	50
	150 mm	120	AAS860301206	50
	178 mm	36	AAS860400365	25
	178 mm	50	AAS860400506	25
	178 mm	60	AAS860400606	25
	178 mm	80	AAS860400806	25
	178 mm	100	AAS860401006	25
	178 mm	120	AAS860401206	25

## BONA CERAMIC 8600 GREEN

Bona Ceramic 8600 Green abrasives deliver outstanding productivity!

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

**Bona**<sup>®</sup>

19



# Abrasives

## Zirconium Mix Abrasives




Highly controlled scratch pattern and reduced fibre tear

Type	Grit	Article number	Q/Box
------	------	----------------	-------

### Bona 8300 Zirconium Mix Belt

Developed specifically for use on wood floors, Bona 8300 Zirconium Mix abrasives feature an anti-static, heat resistant coating that impedes clogging. The unique mix of Zirconium and Silicon Carbide – one of the world's hardest materials – deliver an abrasive that lasts up to five times longer than traditional abrasives as well as producing a very smooth surface.

200 mm x 750 mm	24	AAS467700243	10
200 mm x 750 mm	36	AAS467700363	10
200 mm x 750 mm	40	AAS467700403	10
200 mm x 750 mm	60	AAS467700603	10
200 mm x 750 mm	80	AAS467700803	10
200 mm x 750 mm	100	AAS467701003	10
250 mm x 750 mm	24	AAS467800243	10
250 mm x 750 mm	36	AAS467800363	10
250 mm x 750 mm	40	AAS467800403	10
250 mm x 750 mm	60	AAS467800603	10
250 mm x 750 mm	80	AAS467800803	10
250 mm x 750 mm	100	AAS467801003	10



### Bona 8300 Zirconium Disc

Developed specifically for use on wood floors, Bona 8300 Zirconium Mix abrasives feature an anti-static, heat resistant coating that impedes clogging. The unique mix of Zirconium and Silicon Carbide – one of the world's hardest materials – deliver an abrasive that lasts up to five times longer than traditional abrasives as well as producing a very smooth surface.

150 mm discs designed for Bona Dual Edge

150 mm	24	AAS4675000245	25
150 mm	36	AAS467500365	25
150 mm	40	AAS467500406	50
150 mm	60	AAS467500606	50
150 mm	80	AAS467500806	50
150 mm	100	AAS467501006	50
150 mm	120	AAS467501206	50



# Abrasives

Adhesives

Abrasives

Coatings


Floor Care

Sanding Machines

## Zirconium Mix Abrasives

	Type	Grit	Article number	Q/Box
	Bona Discs 15 Hole			
	150 mm/8 mm	24	AAS470600245	25
	150 mm/8 mm	36	AAS470600365	25
	150 mm/8 mm	40	AAS470600406	50
	150 mm/8 mm	60	AAS470600606	50
	150 mm/8 mm	80	AAS470600806	50
	150 mm/8 mm	100	AAS470601006	50
	150 mm/8 mm	120	AAS470601206	50
	178 mm	24	AAS467400245	25
	178 mm	36	AAS467400365	25
	178 mm	40	AAS467400406	50
	178 mm	60	AAS467400606	50
	178 mm	80	AAS467400806	50
	178 mm	100	AAS467401006	50
	178 mm	120	AAS467401206	50




## Silicon Carbide Abrasives

	Type	Grit	Article number	Q/Box
 <p>Heat resisting anti-static performance reduces clogging to a minimum</p>	Bona 8100 Silicon Carbide Double-sided Disc			
	Double sided discs designed for use with Bona Buffer and Bona FlexiSand.			
	407 mm	24	AAS466800243	10
	407 mm	36	AAS466800363	10
	407 mm	40	AAS466800403	10
	407 mm	60	AAS466800603	10
	407 mm	80	AAS466800803	10
	407 mm	100	AAS466801003	10
407 mm	120	AAS466801203	10	



# Abrasives

## Silicon Carbide Abrasives

	Type	Grit	Article number	Q/Box
	Bona 8100 Silicon Carbide Disc			
	100 mm discs designed for Bona Dual Edge.			
	150 mm	16	AAS466900165	25
	150 mm	24	AAS466900245	25
	150 mm	36	AAS466900365	25
	150 mm	40	AAS466900406	50
	150 mm	50	AAS466900506	50
	150 mm	60	AAS466900606	50
	150 mm	80	AAS466900806	50
	150 mm	100	AAS466901006	50
	150 mm	120	AAS466901206	50
150 mm	150	AAS466901506	50	
	178 mm	16	AAS467100165	25
	178 mm	24	AAS467100245	25
	178 mm	36	AAS467100365	25
	178 mm	40	AAS467100406	50
	178 mm	50	AAS467100506	50
	178 mm	60	AAS467100606	50
	178 mm	80	AAS467100806	50
	178 mm	100	AAS467101006	50
	178 mm	120	AAS467101206	50
		Bona 8100 Silicon Carbide Disc		
200 mm discs designed for Trio style machines.				
200 mm		16	AAS466600165	25
200 mm		24	AAS466600245	25
200 mm		36	AAS466600365	25
200 mm		40	AAS466600406	50
200 mm		50	AAS466600506	50
200 mm		60	AAS466600606	50
200 mm		80	AAS466600806	50
200 mm		100	AAS466601006	50
200 mm	120	AAS466601206	50	



Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

### BONA ABRASIVES

Tried, tested, and widely used by contractors and professionals around the world, the properties of our abrasives have been verified in extensive tests – passing with flying colours.



# Abrasives

## Aluminium Oxide Abrasives


	Type	Grit	Article number	Q/Box
 <p>Ideal for softer timbers</p>	Bona 8500 Aluminium Oxide Belt			
	A good quality standard abrasive for use on all types of wood floors.			
	200 mm x 750 mm	16	AAS468000163	10
	200 mm x 750 mm	24	AAS468000243	10
	200 mm x 750 mm	36	AAS468000363	10
	200 mm x 750 mm	40	AAS468000403	10
	200 mm x 750 mm	50	AAS468000503	10
	200 mm x 750 mm	60	AAS468000603	10
	200 mm x 750 mm	80	AAS468000803	10
	200 mm x 750 mm	100	AAS468001003	10
200 mm x 750 mm	120	AAS468001203	10	
200 mm x 750 mm	150	AAS468001503	10	
	250 mm x 750 mm	16	AAS468200163	10
	250 mm x 750 mm	24	AAS468200243	10
	250 mm x 750 mm	36	AAS468200363	10
	250 mm x 750 mm	40	AAS468200403	10
	250 mm x 750 mm	50	AAS468200503	10
	250 mm x 750 mm	60	AAS468200603	10
	250 mm x 750 mm	80	AAS468200803	10
	250 mm x 750 mm	100	AAS468201003	10
	250 mm x 750 mm	120	AAS468201203	10
	250 mm x 750 mm	150	AAS468001503	10
	Belt designed for Bona Scorpion and Bona Scorpion DCS.			
	200 mm x 480 mm	36	AAS472500363	10
	200 mm x 480 mm	40	AAS472500403	10
	200 mm x 480 mm	60	AAS472500603	10
	200 mm x 480 mm	80	AAS472500803	10
	200 mm x 480 mm	100	AAS472501003	10
	200 mm x 480 mm	120	AAS472501203	10





# Abrasives

## Aluminium Oxide Abrasives



Reversible  
Bona belts  
add value

For use with Bona FlexiDrum

Type	Grit	Article number	Q/Box
200 x 551 mm	16	AAS467900163	10
200 x 551 mm	24	AAS467900243	10
200 x 551 mm	36	AAS467900363	10
200 x 551 mm	40	AAS467900403	10
200 x 551 mm	50	AAS467900503	10
200 x 551 mm	60	AAS467900603	10
200 x 551 mm	80	AAS467900803	10
200 x 551 mm	100	AAS467901003	10
200 x 551 mm	120	AAS467901203	10

## Bona Scrad System



Pad for Bona FlexiSand and Bona Buffer. The Bona Scrad System is a unique abrasive system specially suited for intermediate sanding between coats of varnish. It combines an abrasive Scrad Wing with a soft conditioning pad that cuts off wood fibres and smoothes out scratches at the same time. The Scrad Wing has a Velcro backing that easily attaches to the Scrad Pad.

The Scrad Pad can also be used without the Scrad Wing for less aggressive cutting back.

<b>Bona Scrad Pad</b>	407 mm x 8 mm	320	AAS854303208	5
<b>Bona Scrad Wing</b>	Delta	150	AAS468601506	50

### MACHINES

Whether you are looking for solutions to coarse sanding, fine sanding, edge sanding or dust-free sanding, Bona has state-of-the-art solutions for every situation.








**Bona**<sup>®</sup>



# Abrasives

## Specialist Abrasives

	Type	Grit	Article number	Q/Box
 <p>The ultimate finishing system</p>	<b>Bona Diamond Abrasive</b>			
	Diamond abrasives are designed for the superficial abrasion of floors prefinished with Aluminium Oxide and other hard coatings, prior to overcoating. One set of diamond abrasives lasts at least 100 m <sup>2</sup> .			
	For use with all Bona Flexisand heads and the SupraFlex edger.			
	125 mm	240	AAS471902408	12
	150 mm	80	AAS472000808	8
	150 mm	120	AAS472001208	8
	150 mm	240	AAS472002408	8
	<b>Bona Fiber Pad</b>			
	Fiber pad for producing texture on wood floors. Also offers aggressive cleaning and polish removal for resilient floors.			
	407 mm		AA32153016	1
	<b>Bona Fiber Pad with Velcro Backing</b>			
	Fiber pad with velcro backing for producing texture when light brushing on wood floors. Also offers aggressive cleaning and polish removal for resilient floors.			
	180 mm		AA32153016	1
	150 mm		AA32153150	1
	Type	Grit	Article number	Q/Box
	<b>Bona Net Ceramic</b>			
	150 mm	Grit 80	AAS473200806	50
	<b>Bona Net Alox</b>			
	150 mm	Grit 80	AAS473300806	50
	150 mm	Grit 100	AAS473301006	50
	150 mm	Grit 120	AAS473301206	50




# Abrasives

## Screens

	Type	Grit	Article number	Q/Box
--	------	------	----------------	-------

Sanding screens are used to prepare and condition the surface prior to coating. They are also used when cutting back the grain raise once the finish has been applied. Screens are extremely durable and the perfect product to be used when preparing an old, previously finished floor that is to be re-coated. For use on all kinds of wood floors.



### Bona Sanding Screen, double-sided 407 mm

407 mm	Grit 60	AAS867100603	10
407 mm	Grit 80	AAS867100803	10
407 mm	Grit 100	AAS867101003	10
407 mm	Grit 120	AAS867101203	10
407 mm	Grit 150	AAS867101503	10

## Cleaning Pads

	Type	Grit	Article number	Q/Box
--	------	------	----------------	-------



### 280 mm Cleaning Pad for Bona Mini Buffer

White		AA68041000	5
Tan		AA68042000	5
Red		AA68043000	5

### 407 mm Cleaning Pad for Bona FlexiSand and Bona Buffer

White		AAS867300058	5
Tan		AAS867300038	5
Red		AAS867300048	5
Green		AAS867300028	5

BONA CRAFT OIL 2K GRAPHITE






**Bona**<sup>®</sup>






# Recommended Sanding Methods –

Please refer to technical data sheets or speak to our technical department for more detailed information.





**Speed** For matt, extra matt, ultra matt and raw finish waterbourne lacquers

Coarse sanding	Medium sanding	Fine sanding
		
Bona 8700 Ceramic, Belt/FlexiSand & PowerDrive	Bona 8300 Zirconium Mix or 8600 Ceramic Green, Belt/FlexiSand & Power Drive	Bona Diamond or Net Ceramic/ Net Alox, FlexiSand & Quattro Disc

**Colour** For stains and pigmented oils. Overcoat-able with Traffic HD

Coarse sanding	Medium sanding	Fine sanding
	  	
Bona 8700 Ceramic, Belt/FlexiSand & PowerDrive	Bona 8300 Zirconium Mix or 8600 Ceramic Green, Belt/FlexiSand & Power Drive	Bona Diamond, FlexiSand & Quattro Disc







**Standard** For glossy, silk matt lacquers, non-pigmented oils or hard wax oils

Coarse sanding	Medium sanding	Fine sanding
	 	
Bona 8700 Ceramic, Belt/FlexiSand & PowerDrive	Bona 8300 Zirconium Mix or 8600 Ceramic Green, Belt/FlexiSand & Power Drive	Bona Diamond or Net Ceramic/ Net Alox, FlexiSand & Quattro Disc

**Recoat** For recoating / Bona Floor Treatment Programme – Silver

Deep clean	Fine sanding	Clean with water	Sealing
	 		
Bona Power Scrubber & Deep Clean Solution	Bona Diamond, FlexiSand & Quattro Disc	Bona Power Scrubber and clean water	Bona Traffic HD

**Brushing** Recommended abrading and brushing sequence before oil or lacquer treatments

Coarse	Medium	Waterpop	Texture	Texture	Fine Sanding
					
Bona 8700 Power Drive	Bona 8300 Power Drive	Waterpop (wet) the surface with water	Wire Brushes Power Drive	Fine Brushes Power Drive	Bona Diamond Quattro Disc

## RECORDING STUDIO, LONDON

Following repairs, the Beech floor in the world's largest purpose built recording studio was finished with Bona Craft Oil 2K applied with a Bona FlexiSand using a red pad.

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

**Bona**<sup>®</sup>

29

## BONA TRAFFIC HD, THE NOMAD HOTEL, LONDON

Bona Natural Primer and Bona Traffic HD Extra Matt lacquer combine here to offer great looks and extreme durability.



# Coatings

Whether you're looking for shine, colour, slip resistance or durability, Bona has the ideal finish for all types of wood floor. Since the 1970s, we have pioneered the development of waterborne finishes, providing safe, low-VOC solutions.

In this section you'll find our primers, lacquers and oils as well as our SuperSport range of finishes and maintenance products for sports floors.

Technical and safety data sheets for all products are available for download at [bona.com](https://bona.com) or speak to a member of our technical team for more information.



# Coatings

Adhesives












Abrasives

Coatings

Floor Care

Sanding Machines

## Primers

	Type	Article Number	Pack Size	Packs/Box
    	Bona White			
	<p>Primer producing a white tint look where the intensity can be controlled by applying it in one or more layers. Applied in a single layer it typically preserves the impression of raw, untreated wood. For a truly white impression, apply two or more layers. Highly forgiving formulation designed for easy roller application. To optimise the white characteristic, overcoat with non yellowing Bona top coats such as Domo, Mega EVO, Traffic HD or Traffic GO.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• White tint look</li> <li>• Reduces wood yellowing</li> <li>• Easy roller application</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Waterborne 1-comp  <b>Drying time:</b> 1-2 hrs between coats  <b>Applications:</b> 1-3  <b>Application tools:</b> Bona Roller  <b>Coverage:</b> 10-12 m<sup>2</sup>/L</p>	WB250620001	5 L	3
    	Bona Natural			
	<p>A subtle white-tinted primer designed to preserve the impression of raw, untreated wood. Bona Natural is a highly forgiving formulation for easy roller application, is quick to dry and has good abrasion qualities. Bona Natural should be overcoated with Bona top coats such as Domo, Mega EVO, Traffic HD or Traffic GO to avoid any colouration and to achieve the look and feel of pure wood with the superior protection of a quality lacquer.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Produces a natural, unfinished look</li> <li>• Reduces yellowing</li> <li>• Easy roller application</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Waterbased 1 comp  <b>Drying time:</b> 1-2 hrs between coats  <b>Applications:</b> 1-2  <b>Application:</b> Bona roller  <b>Coverage:</b> 10-12 m<sup>2</sup>/L</p>	WB251620001	5 L	3
	Bona Blocker			
	<p>Additive for reducing bleeding from wood extracts and particularly extracts from knots as well as tannin bleed on white oak. Reduces the risk of stains developing on top of the knots and tannin bleed on white oak. One bottle is sufficient for two 5L cans of Bona White or Bona Natural Primer.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Reduces yellowing from wood knots</li> </ul> <p><b>Technical Data:</b></p> <p><b>Mixing Ratio:</b> 20:1 (4,8%)  <b>Volume:</b> 0.5L, enough for 2 x 5L of Prime White or Prime Natural</p>	WH341009001	0.5 L	1



# Coatings

## Primers

	Type	Article Number	Pack Size	Packs/Box
   	<b>Bona Classic UX</b>			
	Well-bodied surface. Soft, flexible film reducing potential effects of side-bonding. Forgiving application properties. Suitable on practically all types of wood. Non-yellowing.			
	<b>Key Benefits:</b>		<b>Technical Data:</b>	
	<ul style="list-style-type: none"> <li>• Light colouration</li> <li>• All types of wood</li> <li>• Reduces side-bonding effects</li> <li>• Easy roller application</li> </ul>		<b>Category:</b> Waterborne 1-comp <b>Drying time:</b> 1-2 hrs between coats <b>Applications:</b> 1 <b>Application tools:</b> Bona Roller <b>Coverage:</b> 8-10 m <sup>2</sup> /L	
		WB100613001	1 L	6
		WB100620001	5 L	3
   	<b>Bona Intense</b>			
	Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable on practically all types of wood and especially on tropical wood.			
	<b>Key Benefits:</b>		<b>Technical Data:</b>	
	<ul style="list-style-type: none"> <li>• Medium colouration</li> <li>• All wood, tropical wood</li> <li>• First choice for underfloor heating</li> <li>• Easy roller application</li> </ul>		<b>Category:</b> Waterborne 1-comp <b>Drying time:</b> 1-2 hrs between coats <b>Applications:</b> 1 <b>Application tools:</b> Bona Roller <b>Coverage:</b> 8-10 m <sup>2</sup> /L	
		WB250020001	5 L	3
  	<b>Bona Amber</b>			
	Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable for oak and darker types of wood including tropical species.			
	<b>Key Benefits:</b>		<b>Technical Data:</b>	
	<ul style="list-style-type: none"> <li>• Rich colouration</li> <li>• Oak, dark, tropical wood</li> <li>• Good for underfloor heating</li> <li>• Easy roller application</li> </ul>		<b>Category:</b> Waterborne 1-comp <b>Drying time:</b> 1-2 hrs between coats <b>Applications:</b> 1-2 <b>Application tools:</b> Bona Roller <b>Coverage:</b> 8-10 m <sup>2</sup> /L	
		WB255020001	5 L	3

## Bona Primers



Bona White



Bona Natural



Bona Classic UX



Bona Intense






Bona Amber









# Coatings

## Lacquers

	Type	Article Number	Pack Size	Packs/Box
  	<b>Bona Domo</b>			
	<p>Bona Domo is a member of the Bona family of premium finishes. With good build and a quick drying formula, it protects the wooden floor in no time. Bona Domo can be used from start to finish, both as a base- and topcoat and is easy to abrade.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Good build</li> <li>• Forgiving/easy application</li> <li>• Easy to abrade</li> <li>• Non-yellowing formula</li> <li>• Primer and topcoat in one</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Waterborne 1-comp  <b>Drying time:</b> 1-2 hrs between coats  <b>Application tools:</b> Bona Roller  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat</p>			
	Silkmatt	WT220320001	5 L	3
	Matt	WT220620001	5 L	2

   	<b>Bona Mega</b>			
	<p>For offices, small shops, hotel rooms and as a premium choice for homes. Innovative, waterborne, one-component formula, that reacts with oxygen and performs like a two-component formula. No mixing required, use straight from the bottle. Also very good for plank floors and for floors with underfloor heating. Produces a subtle rich tone which is more noticeable on light wood species and floors treated with light stains or whitening primers. Overcoating Bona White primer with Bona Mega is not recommended if you are looking to achieve a true white look.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• One-component with two-component performance</li> <li>• Very good for underfloor heating</li> <li>• Very low VOC</li> <li>• EN 71:3 Compliant</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Waterborne 1-comp  <b>Drying time:</b> 2-3 hrs between coats  <b>Application tools:</b> Bona Roller  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat  <b>Slip resistance:</b> Meets DIN 18032:2 for slip resistance (gloss, silkmatt, extra matt and matt)</p>			
	Gloss	WT133013012	1 L	12
	Gloss	WT133020002	5 L	3
	Silkmatt	WT133313012	1 L	12
	Silkmatt	WT133320002	5 L	3
	Matt	WT133613012	1 L	12
	Matt	WT133620001	5 L	3
	Extra Matt	WT133920001	5 L	3

Adhesives

Abrasives

Coatings





Floor Care

Sanding Machines



# Coatings

## Lacquers

	Type	Article Number	Pack Size	Packs/Box
   	<b>Bona Mega EVO</b>			
	Bona Mega EVO is a next generation 1K waterborne lacquer for wood floors with a new state-of-the-art self crosslinking technology that activates when applied.			
	Suitable for heavy domestic and medium commercial use. The unique formula delivers fast curing with excellent resistance to scratches, wear, and chemicals. Bona Mega EVO's smooth consistency offers outstanding filling and levelling properties. The unique self-crosslinking technology enables a fast return to the floor and short waiting times between coats. With VOC levels below 3%, the lacquer contributes to good working conditions with a low impact on indoor air quality.			
	<b>Key Benefits:</b>		<b>Technical Data:</b>	
	<ul style="list-style-type: none"> <li>• Rapid development of performance</li> <li>• Safe and forgiving application</li> <li>• Great filling power</li> <li>• Low emission EC1 plus</li> </ul>		<b>Category:</b> Waterborne 2-comp <b>Drying time:</b> 1-2 hrs between coats <b>Application tools:</b> Bona Roller or Swivel Head Applicator <b>Coverage:</b> 8-10 m <sup>2</sup> /L per coat	
	Silk Matt	WT500313001	1 L	6
	Silk Matt	WT500320001	5 L	3
	Matt	WT500613001	1 L	6
Matt	WT500620001	5 L	3	
Extra Matt	WT500920001	1 L	6	
Extra Matt	WT500913001	5 L	3	
Ultra Matt	WT500813001	1 L	6	
Ultra Matt	WT500820001	5 L	3	

Mega Evo Ultra Matt, the clear replacement to Mega Natural



# Coatings

Adhesives





Abrasives





Coatings

Floor Care

Sanding Machines

## Lacquers










	Type	Article Number	Pack Size	Packs/Box
   	<b>Bona Traffic HD</b>			
	<p>The world's toughest and fastest drying finish for wooden floors exposed to extreme wear. You can walk on it after just 12 hours. Used in hotels, restaurants and airports worldwide, where short downtime is essential. Waterbased and very low VOC and odour. Non-yellowing.</p>			
	<p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• The ultimate choice for durability</li> <li>• Superior protection for commercial and public areas</li> <li>• Extra fast, allows full traffic after just 12 hours</li> <li>• Very low VOC and odour</li> <li>• EN 71:3 compliant</li> </ul>		<p><b>Technical Data:</b></p> <p><b>Category:</b> Waterborne 2-comp  <b>Drying time:</b> 2-3 hrs between coats  <b>Application tools:</b> Bona Roller  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat  <b>Slip resistance:</b> Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)</p>	
	Silkmatt	WT155346001	4.95 L	3
	Matt	WT155646001	4.95 L	3
	Extra Matt	WT155946001	4.95 L	3
Hardener for Bona Traffic HD (spare pack)		WH330045001	0.40 L	3

   	<b>Bona Traffic HD Anti Slip</b>			
	<p>Adds the highest standard of friction in areas where it's needed the most – like stairs, corridors, kitchens and food service areas. Superb performance against wet spills.</p>			
	<p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Reduces risk of slipping</li> <li>• DIN 51 130 – R10</li> <li>• BS 7976 – low slip potential (PTV &gt;36)</li> <li>• AS 4586 – P4</li> <li>• Excellent resistance to wear</li> <li>• Excellent application and levelling properties</li> <li>• Non-yellowing</li> <li>• Extra fast, allows full traffic after just 12 hours</li> <li>• Very low VOC and odour</li> </ul>		<p><b>Technical Data:</b></p> <p><b>Category:</b> Waterborne 2-comp  <b>Drying time:</b> 2-3 hrs between coats  <b>Application tools:</b> Bona Roller  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat</p>	
	Matt	WT155846001	4.95 L	3
Hardener for Bona Traffic HD Anti Slip (spare pack)		WH330045001	0.40 L	3



# Coatings

## Lacquers

	Type	Article Number	Pack Size	Packs/Box
   	<b>Bona Traffic HD Raw</b> Its unique surface structure creates a soft, haptic feeling which is not only a pleasure to walk on but has a high slip safety making it great for homes with children and pets. Safe in both application and in use as shown in EC1 Classification for very low impact on the indoor air environment. Clear, non-yellowing formula.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>Keeps the look and feel of raw wood</li> <li>Lacquered protection with natural impression</li> <li>Easy and safe to apply</li> <li>High slip safety</li> </ul>		<b>Technical Data:</b> <b>Category:</b> Waterborne 2-comp <b>Drying time:</b> 3-4 h between coats <b>Application tools:</b> Bona Roller (AT3100100) <b>Coverage:</b> 8-10 m <sup>2</sup> /lit and application	
	Raw	WT194846001	4.95 L	3
	Hardener for Bona Traffic HD Raw (spare pack)	WH341045001	0.40 L	3
   	<b>Bona Traffic GO</b> Bona Traffic GO is a top-performing 2K waterborne lacquer with a built-in hardener. It is ready to use straight from the can and delivers excellent protection to wood floors in all types of areas. The formulation prioritises environmental and user safety, resulting in a highly durable and secure surface that surpasses today's requirements. With VOC levels below 3%, Bona Traffic GO promotes a safer environment and supports our continued work to phase out PFAS.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>Shake &amp; Go – No mixing – No waste</li> <li>Natural &amp; safer</li> <li>Heavy wear durability</li> <li>Built-in hardener – activated when applied</li> </ul>		<b>Technical Data:</b> <b>Category:</b> Waterborne built in hardener <b>Drying time:</b> 2-3 hrs between coats <b>Application tools:</b> Bona Roller or Swivel Head Applicator <b>Coverage:</b> 8-10 m <sup>2</sup> /L	
	Silkmatt	WT400320001	5 L	3
	Matt	WT400613012	1 L	6
	Matt	WT400620001	5 L	3
	Extra Matt	WT400920001	5 L	3
	Ultra Matt	WT400813012	1 L	6
Ultra Matt	WT400820001	5 L	3	
	<b>Bona Retarder</b> An additive which improves the levelling and prolongs the open time of Bona waterborne primers and finishes. It is designed to be used when the humidity on site is low and/or the temperature of the room is higher than normal. Its use also reduces the risk of the finish drying too quickly and leaving roller marks in the dried coat.			
		WX100006001	200 ml	12

**Bona**<sup>®</sup>

## Bona lacquers – durability scale



## Bona finishes – reflective values

Product	Sheen given as reflective values at 60°
Mega – gloss	90%
Mega – silkmatt	45-50%
Mega EVO – silkmatt, Domo – silkmatt, Traffic HD – silkmatt	40%
Mega – matt, Traffic GO – matt, Traffic HD – matt, Hard Wax Oil – silkmatt	20-25%
Mega EVO – matt, Traffic HD antislip, Domo – matt	15-18%
Traffic HD – extra matt, Hard Wax Oil – matt, Traffic GO – extra matt	10-13%
Mega – extra matt, Mega EVO – extra matt	9%
Mega EVO – ultra matt, Traffic GO – ultra matt	5%
Traffic HD Raw – ultra matt	4%
Hard Wax Oil – extra matt	3%

Adhesives

Abrasives

Coatings




Floor Care




Sanding Machines



# Coatings

## Bona SuperSport

	Type	Article Number	Pack Size	Packs/Box
  	Bona SuperSport Primer			
	<p>A one-component waterborne primer for untreated wooden sports floors. It delivers excellent adhesion to wood, as well as crucial side bonding reducing properties, and creates an optimal foundation for top coats and line markings.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Medium rich wood colouration</li> <li>• Reduced risk of side bonding</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> 2-3 hours at 20°C/60° RH</p> <p><b>Tools:</b> Roller, applicator</p> <p><b>Coverage:</b> 8-10 m<sup>2</sup>/L single coat application</p>			
		WB251020001	5 L	3

  	Bona SuperSport HD			
	<p>A premium two-component waterborne wood floor lacquer developed for professional use on wooden multi-use floors and particularly as part of Bona's Silver renovation programme. The curing process takes approximately 3 days (90% cured in 24 hours, 100% after 72 hours). The floor may be played on after 24 hours but remains susceptible to scuffing until completely cured.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Excellent durability</li> <li>• Very low indoor air emission</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> Ready for sanding/recoating: 3 hours Full hardness: 3 days</p> <p><b>Tools:</b> Roller, applicator</p> <p><b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat</p> <p><b>Slip Resistance:</b> EN14904:2006</p> <p><b>Sheen (at 60°):</b> Matt – 20%, Gloss – 85%</p>			
	Matt	WT137620001	5 L	3
	Gloss	WT137020001	5 L	3
	Hardener	WH370045001	0.4 L	1

Back on floor in 24 hrs!

# PERFECT FOR ALL SPORT FLOORS



Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

**Bona**<sup>®</sup>



# Coatings

## Bona SuperSport



Type	Article Number	Pack Size	Packs/Box
------	----------------	-----------	-----------

### Bona SuperSport Line Paint 1K

One or two component line paint for use on resilient and wooden sports floors. Developed for use with the Bona SuperSport system on both wood and resilient floors. Available in 10 vibrant colours.

Use as a one component product when over coated with lacquer, or as a two component product with SuperSport HD Hardener when used as the final surface (i.e not over coated).

#### Key Benefits:

- Superb hiding ability
- Excellent flow and levelling
- Possible to boost with a hardener
- Waterborne

#### Technical Data:

**Product type:** 1-component waterborne polyurethane paint

**Gloss level:** Matt (20-30% at 60°)

**Coverage:** 6-10 m<sup>2</sup>/L

**Application Tools:** Fine bristle brush

RAL 501 Dark Blue	EC801713101	1 L	1
RAL 6018 Light Green	EC801613101	1 L	1
RAL 6029 Dark Green	EC801513101	1 L	1
RAL 9005 Black	EC801913101	1 L	1
RAL 9016 White	EC802013101	1 L	1
RAL 1021 Yellow	EC801113101	1 L	1
RAL 3000 Red	EC801413101	1 L	1
RAL 5012 Light Blue	EC801813101	1 L	1
RAL 4008 Violet	EC801313101	1 L	1
RAL 2004 Orange	EC801213101	1 L	1
SuperSport HD Hardener (Spare pack) 1 unit is suitable for 4 x 1 litre line paint	WH370045001	0.4 L	3





# Coatings

Adhesives



Abrasives

Coatings

Floor Care

Sanding Machines

## Bona SuperSport

	Type	Article Number	Pack Size	Packs/Box
 <p>For wood and resilient floors</p>	Bona SuperSport Cleaner			
<p>A cleaner that is gentle on the surface but effectively removes grease and grime, leaving no residue on the surface. Concentrated slightly alkaline formulation designed for frequent use. Low foaming and suitable for autoscrubber or manual application</p>				
<p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Safe for use on wood and resilient sports floors</li> <li>• For autoscrubber or manual use</li> </ul>				
<p><b>Technical Data:</b></p> <p><b>Dilution:</b> Normal cleaning: 50ml to 5L water  <b>Heavy soiled floors:</b> 100ml to 5L water</p>				
		WM763020001	5 L	3
 <p>Restores optimal slip resistance</p>	Bona SuperSport Deep Clean			
<p>Designed for periodic deep cleaning of sports floors, will remove black heel marks etc as well as the build-up of body fats and other contaminants. Diluted product should be applied using mop or spray equipment. After 3-5 minutes scrub using a buffing machine or autoscrubber and red pad, and make final pass with clean water.</p>				
<p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Degreases the surface</li> <li>• Removes scuff marks</li> <li>• Safe for use on wood and resilient sports floors</li> </ul>				
<p><b>Technical Data:</b></p> <p><b>Dilution:</b> 1L to 5L water</p>				
		WM636020001	5 L	3



FIBA, the International Basketball Federation, is the world governing body for basketball. The FIBA Equipment & Venue Centre produces publications which provide technical assistance for those who practice the sport or organise its competitions.

The objective is to attain a high standard of quality, safety and technology, for the athletes, for the public, as well as for the media, whose demands are ever-growing. This can only be obtained by a constant control and inspection of facilities and equipment.

Bona is proud to be a FIBA Equipment & Venue partner and approved supplier of finishes and maintenance products for wooden sports floors.



# Coatings

## Oils – Effect Treatment

	Type	Article Number	Pack Size	Packs/Box																								
	<p><b>Bona Nordic Tone</b></p> <p>Bona Nordic Tone is a pre-treatment to Bona Craft Oil for creating the unique character of a Scandinavian white washed floor. Combine with Bona Craft Oil Frost or choose a contrasting colour for an exciting 2-dimensional effect. The colour can be changed or further intensified by adding 5% of Bona Mix Colour to the Tone.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Light, white washed effect</li> <li>• Inhibits wood yellowing</li> <li>• Whiteness can be controlled by number of applications (normally only one application is necessary)</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Pre-treatment, 1-comp  <b>Drying time:</b> 1-2 hrs (between applications)  <b>Application:</b> Oil application sleeve or wide floor brush  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat</p>	WX700020001	5 L	3																								
	<p><b>Bona Rich Tone</b></p> <p>Bona Rich Tone is a pre-treatment for wood floors, bringing out a dark, smoky wood colour*, giving the floor a touch of sophistication. Continue with a layer of Bona Craft Oil, any colour, for an exciting 2-dimensional effect or apply Bona Hard Wax Oil directly for an elegant finish. The colour can be changed or further intensified by adding 5% of Bona Mix Colour.</p> <p>*the colour is achieved by a chemical reaction to wood and results may vary between wood species. Oak in particular produces a deep, dark colouration after treatment.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Dark, smoky effect</li> <li>• Quick drying</li> <li>• Odourless</li> </ul> <p><b>Technical Data:</b></p> <p><b>Category:</b> Pre-treatment, 1-comp  <b>Drying time:</b> 1-2 hrs (between applications)  <b>Application:</b> Oil application sleeve  <b>Coverage:</b> 8-10 m<sup>2</sup>/L per coat</p>	WX900020001	5 L	3																								
	<p><b>Bona Mix Colour</b></p> <p>Bona Mix Colour is a concentrated pigment paste for waterborne systems and specifically for Bona Nordic Tone and Bona Rich Tone. Added to either of these products it can intensify or change the colour of the Bona Tone to create a special effect. Note that the surface must always be treated with Bona Craft Oil or Bona Hard Wax Oil afterwards.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Intensifies Bona tone treatments</li> </ul> <p><b>Technical Data:</b></p> <p><b>Content:</b> Concentrated pigment paste  <b>Consumption:</b> 250 ml for one 5 L bottle (5%) of Bona Nordic Tone or Bona Rich Tone.</p> <table border="1"> <thead> <tr> <th>Colour</th> <th>Article Number</th> <th>Pack Size</th> <th>Packs/Box</th> </tr> </thead> <tbody> <tr> <td>Mahogany</td> <td>GX504007</td> <td>0.25 L</td> <td>1</td> </tr> <tr> <td>Walnut</td> <td>GX504107</td> <td>0.25 L</td> <td>1</td> </tr> <tr> <td>White</td> <td>GX504207</td> <td>0.25 L</td> <td>1</td> </tr> <tr> <td>Grey</td> <td>GX504307</td> <td>0.25 L</td> <td>1</td> </tr> <tr> <td>Black</td> <td>GX504407</td> <td>0.25 L</td> <td>1</td> </tr> </tbody> </table>	Colour	Article Number	Pack Size	Packs/Box	Mahogany	GX504007	0.25 L	1	Walnut	GX504107	0.25 L	1	White	GX504207	0.25 L	1	Grey	GX504307	0.25 L	1	Black	GX504407	0.25 L	1			
Colour	Article Number	Pack Size	Packs/Box																									
Mahogany	GX504007	0.25 L	1																									
Walnut	GX504107	0.25 L	1																									
White	GX504207	0.25 L	1																									
Grey	GX504307	0.25 L	1																									
Black	GX504407	0.25 L	1																									



# Coatings

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

## Oils – Wear Treatment

Type	Article Number	Pack Size	Packs/Box
------	----------------	-----------	-----------



Over-coatable with all versions of Bona Traffic HD if required

Standard colours (bespoke colours can be mixed on request)

### Bona Craft Oil 2K

Bona Craft Oil 2K gives you the natural look of an oiled floor but, when you need extra surface protection, it can be overcoated with all versions of Bona Traffic two component lacquers for added durability. The unique formula is made from modified plant-based oil and delivers tough protection to floors in all environments – even before the application of a lacquer coat.

Compatible with most wood species, even tricky ones such as Cherry and Walnut, floors treated with Bona Craft Oil 2K are ready for light use after just 8 hours (Neutral) or 12 hours (colours) and can be overcoated with lacquer, if required, after 12 hours.

Available in 19 standard colours, including Neutral, which can all be used in conjunction with Bona Tones and Mix Colours to create a wide range of colour effects. Bespoke colours can be mixed on request.

#### Key Benefits:

- Great stain, wear and water resistance
- Spot repairable
- Fast curing, ready for light use in 8 hours
- Extremely high degree of saturation
- Very low VOC content
- Overcoatable with all versions of Bona Traffic two-component lacquers

#### Technical Data:

**Category:** Hardening oil, 2-comp

**Drying time (until use):** 8 hrs

**Overcoating:** 12 hrs

**Application tools:** Squeegee, roller, trowel or buffer

**Coverage:** 30 m<sup>2</sup>/L



Pure (Neutral)



Frost



Clay



Graphite



Ash



Sand




Invisible



Light Grey




Umbra



Old Grey



Neutral Light



Black Night



Dark Brown



Grey Night



Dark Grey



Snow



Misty



Provincial



Driftwood



# Coatings

## Bona Craft Oil 2K

Type	Article Number	Pack Size	Packs/Box
Bona Craft Oil 2K Pure (Neutral)	GT570008001	0.4 L	1
Bona Craft Oil 2K Pure (Neutral)	GT570014001	1.25 L	1
Bona Craft Oil 2K Frost	GT571108001	0.4 L	1
Bona Craft Oil 2K Frost	GT571114001	1.25 L	1
Bona Craft Oil 2K Clay	GT572108002	0.4 L	1
Bona Craft Oil 2K Clay	GT572114001	1.25 L	1
Bona Craft Oil 2K Graphite	GT573108002	0.4 L	1
Bona Craft Oil 2K Graphite	GT573114001	1.25 L	1
Bona Craft Oil 2K Ash	GT574108002	0.4 L	1
Bona Craft Oil 2K Ash	GT574114001	1.25 L	1
Bona Craft Oil 2K Umbra	GT575108002	0.4 L	1
Bona Craft Oil 2K Umbra	GT575114001	1.25 L	1
Bona Craft Oil 2K Sand	GT579108001	0.4 L	1
Bona Craft Oil 2K Sand	GT579114011	1.25 L	1
Bona Craft Oil 2K Invisible	GT580008001	0.4 L	1
Bona Craft Oil 2K Invisible	GT580014011	1.25 L	1
Bona Craft Oil 2K Old Grey	GT577108001	0.4 L	1
Bona Craft Oil 2K Old Grey	GT577114001	1.25 L	1
Bona Craft Oil 2K Light Grey	GT576114011	0.4 L	1
Bona Craft Oil 2K Light Grey	GT576114001	1.25 L	1
Bona Craft Oil 2K Neutral Light	GT580108001	0.4 L	1
Bona Craft Oil 2K Neutral Light	GT580114001	1.25 L	1
Bona Craft Oil 2K Dark Grey	GT590408007	0.4 L	1
Bona Craft Oil 2K Dark Grey	GT590414007	1.25 L	1
Bona Craft Oil 2K Black Night	GT590108007	0.4 L	1
Bona Craft Oil 2K Black Night	GT590114007	1.25 L	1
Bona Craft Oil 2K Dark Brown	GT590208007	0.4 L	1
Bona Craft Oil 2K Dark Brown	GT590214007	1.25 L	1
Bona Craft Oil 2K Grey Night	GT590308007	0.4 L	1
Bona Craft Oil 2K Grey Night	GT590314007	1.25 L	1
Bona Craft Oil 2K Snow	GT590508007	0.4 L	1
Bona Craft Oil 2K Snow	GT590514007	1.25 L	1
Bona Craft Oil 2K Misty	GT590608007	0.4 L	1
Bona Craft Oil 2K Misty	GT590614007	1.25 L	1

### Bona Craft Oil 2K – continued

Type	Article Number	Pack Size	Packs/Box
Bona Craft Oil 2K Provincial	GT583008001	0.4 L	1
Bona Craft Oil 2K Provincial	GT580114001	1.25 L	1
Bona Craft Oil 2K Driftwood	GT570008001	0.4 L	1
Bona Craft Oil 2K Driftwood	GT582014011	1.25 L	1

### Bona Craft Oil 2K – wet samples

Type	Article Number	Pack Size
Bona Craft Oil 2K Pure (Neutral)	EMS0561009001	40 ml
Bona Craft Oil 2K Frost	EMS0571109001	40 ml
Bona Craft Oil 2K Clay	EMS0572109001	40 ml
Bona Craft Oil 2K Graphite	EMS0573109001	40 ml
Bona Craft Oil 2K Ash	EMS0574109001	40 ml
Bona Craft Oil 2K Sand	EMS0579109001	40 ml
Bona Craft Oil 2K Invisible	EMS0580009001	40 ml
Bona Craft Oil 2K Light Grey	EMS0576109001	40 ml
Bona Craft Oil 2K Umbra	EMS0575109001	40 ml
Bona Craft Oil 2K Old Grey	EMS0577109001	40 ml
Bona Craft Oil 2K Neutral Light	EMS0580109001	40 ml
Bona Craft Oil 2K Black Night	EMS0590109001	40 ml
Bona Craft Oil 2K Dark Brown	EMS0590209001	40 ml
Bona Craft Oil 2K Grey Night	EMS0590309001	40 ml
Bona Craft Oil 2K Dark Grey	EMS0578109001	40 ml
Bona Craft Oil 2K Snow	EMS0590509001	40 ml
Bona Craft Oil 2K Misty	EMS0590609001	40 ml
Bona Craft Oil 2K Provincial	EMS0583009001	40 ml
Bona Craft Oil 2K Drftwood	EMS0582009001	40 ml

These samples are supplied without hardener and are for the purposes of colour checking/matching only.

### Bespoke colours

Bona's in house colour mixing service means that bespoke colours for Bona Craft Oil 2K can be mixed on request to match existing surfaces or new design schemes. Please speak to our sales or technical team to discuss your requirements.



**Bona**<sup>®</sup>



# Coatings

## Oils – Wear Treatment



Type	Article Number	Pack Size	Packs/Box
------	----------------	-----------	-----------

### Bona Hard Wax Oil

Natural oil, modified for superior protection of wood floors. Produces the warm look of an oiled floor while establishing a hard-wearing and stain resistant surface that is spot-repairable and easy to maintain. Unique composition formulated without controversial substances such as cobalt and ketoximes. Very low in odour and easy to handle, being applicable with roller, brush or trowel. Leaves an open, breathing surface that reduces the risk of side-bonding. Highly suitable for floors with underfloor heating. Should you wish to transform your floor with a new colour then simply prepare the surface with Bona Craft Oil and/or the Bona Rich Tone before sealing your masterpiece with 1-2 layers of Bona Hard Wax Oil.

#### Key Benefits:

- Tough, dirt repellent surface
- Excellent water resistance
- Very low in odour
- Free from cobalt and ketoximes
- EN 71:3 Compliant

#### Technical Data:

**Category:** Hardening oil, 1-comp  
**Drying time (until use):** 24 hrs  
**Application tools:** Roller, brush or stainless steel trowel  
**Coverage:** 24 m<sup>2</sup>/L per coat

Silkmatt	AF3102013	1 L	6
Silkmatt	AF3100025	2.5 L	2
Silkmatt	AF3102010	10 L	1
Matt	AF3602013	1 L	6
Matt	AF3600025	2.5 L	2
Matt	AF3602010	10 L	1
Extra Matt	AF390013001	1 L	6
Extra Matt	AF390015001	2.5 L	2
Extra Matt	AF390024001	10 L	1



# Coatings

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

## Oils – Wear Treatment



### Bona Oil 35

Bona Oil 35 is a hardening oil which contains less than 10% VOC, and is intended for the surface treatment of untreated wood floors exposed to normal or heavy wear. Due to its application and quick drying time, the floor may be completed in one working day. Meets DIN EN 71:3 (for use on children's toys etc).

#### Key Benefits:

- Quick drying, fast working process
- Low risk of bleed-back
- Economic, long-lasting formula.
- Reduced risk of slipping, classified R10 according to DIN 51130
- Meets RAL-UZ 38 for VOC and formaldehyde emissions
- Meets EN 71:3 for use on children's toys
- Free from cobalt

#### Technical Data:

**Drying Time:** (at 20°C/60% RH)  
24 hrs (before use)  
**Tools:** Rubber bladed applicator, steel trowel or buffing machine  
**Waiting time between coats:**  
20 minutes  
**Coverage:** 10-12 m<sup>2</sup>/L total consumption (depending upon species)

Type	Article Number	Pack Size	Packs/Box
	GT590013001	1 L	6
	GT590020001	5 L	2

## Oils – Outdoor



### Bona Decking Oil

Bona Decking Oil is a concentrated blend of vegetable oils, modified for superior impregnation and long-lasting protection of wooden deckings and other exterior woodwork. It enhances the natural wood grain while protecting against moisture ingress and reducing the potential of wood cracking and warping.

#### Key Benefits:

- Long-lasting protection
- Contains UV protection
- Highly water repellent

#### Technical Data:





**Category:** Hardening oil, 1-comp  
**Drying time (until use):** 24 hrs  
**Application:** Wide brush or Bona Oil Roller  
**Coverage:** Approx. 20 m<sup>2</sup>/L

Type	Article Number	Pack Size	Packs/Box
Neutral	GT551115001	2.5 L	4
Neutral	GT551124001	10 L	2
Mahogany	GT551215001	2.5 L	4
Teak	GT551315001	2.5 L	4
Grey	GT551515001	2.5 L	4



# Coatings

## Fillers

	Type	Article Number	Pack Size	Packs/Box
 	Bona Mix & Fill Plus			
	<p>Waterborne Bona Mix &amp; Fill Plus allows the specification of a completely waterborne installation. Designed to be mixed with fine sanding dust from the floor being treated, Mix &amp; Fill Plus dries quickly, is easy to sand and can be used to fill minor defects and gaps of up to 3 mm. Can be used with exotic tropical timbers such as Merbau etc.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Exceptional filling ability</li> <li>• Quick drying</li> <li>• Anti-corrosive</li> <li>• Odourless</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> (at 20°C/60% RH) 15-30 minutes before subsequent application, 30-60 minutes before sanding 1-2 hrs before application of oil or finish</p> <p><b>Coverage:</b> 8-10 m<sup>2</sup>/L</p>	WF220020001	5 L	3
 	Bona Mix & Fill			
	<p>Waterborne Mix &amp; Fill is designed to be mixed with fine sanding dust from the floor to be treated, dries quickly and can be sanded. For filling gaps up to 2 mm.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Easy to sand</li> <li>• Quick drying</li> <li>• Anti-corrosive</li> <li>• Odourless</li> </ul> <p><b>Technical Data:</b></p> <p><b>Drying Time:</b> (at 20°C/60% RH) 15-30 minutes before subsequent application, 30-60 minutes before sanding 1-2 hrs before application of oil or finish</p> <p><b>Coverage:</b> 8-10 m<sup>2</sup>/L</p>	WF21001302	1 L	10
		WF21002002	5 L	3

### VINKEVEEN, THE NETHERLANDS

Craft Oil 2K Snow and Bona Traffic HD Raw have been used to create a stunning Raw finish.





# Coatings

## Fillers



### Bona Gap Master

Bona Gap Master is a silicone free mastic designed to fill gaps between parquet blocks, around skirting boards and door thresholds. Based on polyurethane and acrylate, it contains no solvents, is odourless and can be used with all parquet finishes. It retains a high degree of flexibility. Expansion is approximately 7%.

#### Key Benefits:
















- High degree of flexibility
- Can be sanded and overcoated
- Solvent free
- Silicone free

#### Technical Data:

**Drying time:** (at 20°C/60% RH) 18-24 hrs

**Coverage:** Up to 6 linear metres per tube

For gaps up to 5 mm deep and 10 mm wide

	Type	Article Number	Pack Size	Packs/Box
	Beech Dark	AF4411311003	310 ml	12
	Ash / Fir	AF4411311103	310 ml	12
	Oak Dark	AF4411311203	310 ml	12
	White	AF4411311303	310 ml	12
	Maple	AF4411311403	310 ml	12
	Beech Light	AF4411311503	310 ml	12
	Oak Light	AF4411311603	310 ml	12
	Cherry	AF4411311703	310 ml	12
	Bog Oak	AF4411311803	310 ml	12
	Wenge	AF4411311903	310 ml	12
	Black	AF4411312003	310 ml	12
	Nut	AF4411312103	310 ml	12
	Teak	AF4411312203	310 ml	12
	Grey	AF4411312503	310 ml	12
	Medium Oak	AF4411311213	310 ml	12

Adhesives

Abrasives

Coatings






Floor Care

Sanding Machines



# Coatings

## Tools for use with coatings

	Article No.	Q/Box	Product Information
			<p>Bona Extension Bar – Silver</p> <p>For use with Bona applicators, no adaptor required.</p>
	AT31401002	1	Telescopic – 110-200 cm
			<p>Rubber Bladed Applicator</p> <p>Oil applicator for use with Bona Oil 35 and Bona Craft Oil range.</p>
	AT31302001	1	50 cm
			<p>Applicator Sleeve</p> <p>Replacement sleeve for use with Swivelhead Applicator.</p>
	AT956903	6	46 cm
			<p>Swivel Head Applicator</p> <p>For use with Applicator Sleeve. Extension handle also available separately.</p>
	AT956904	1	46 cm
			<p>Mixing Bottle</p> <p>Plastic bottle with measurements for decanting/mixing Bona Traffic/Bona Sportive with hardener. Product must be used within four hours of mixing.</p>
	30031	1	2 L



# Coatings

Adhesives





Abrasives

Coatings

Floor Care





Sanding Machines

## Tools for use with coatings

	Article No.	Q/Box	Product Information
	<b>Bona SuperCoat Roller (Lacquer)</b> Quality roller with a polyester pile for correct application rate of lacquer. 11 mm pile.		
	AT31002325	1	25cm
	AT31002338	1	38cm
	<b>Bona Hardwax Oil Roller Microfibre</b> Short pile synthetic roller for the application of hard wax oil.		
	AT31120897	10	25cm x 5cm
	<b>Bona Lacquer Roller 12cm</b> Synthetic roller for the application of lacquer. Designed specifically for the application of Bona waterborne finishes and primers. Narrow roller for edges and stair treads. Medium pile.		
	AT31002500	10	12cm
	<b>Roller Handles for rollers</b>		
	AT31004000	1	12cm
	AT31014001	1	25cm
	AT31002800	1	30-50cm



# Coatings

Tools for use with coatings	Article No.	Q/Box	Product Information
	Flat Bladed Trowel		
	Trowel for the application of Bona Quick primer or many of the Bona Oil systems.		
	AT31400270	1	270 mm
	AT31400350	1	350 mm
	Bona Wool Pad		
	Pad for Bona FlexiSand and Bona Buffer. The pad is made of genuine sheep wool for application of oil and polishing of oiled or waxed floors. Wool produces higher heat towards the surface compared to synthetic pads which improves the penetration of oil into the wood and accelerates the drying process. Contains natural lanolin (wool wax) for a satin finish. Highly recommended for Bona Oils.		
	AA68071000	5	407 mm
	Bona Oil Pad		
	Pad for buffing in oil.		
	AAS867300068	5	407 mm
	Bona Oil Cloth		
	Lint-free cloth for removal of excess oil.		
	AT32086000	1	
Plastic Liners			
Plastic liners for roller trays - available FOC with purchases of lacquer - please add to order..			
	30055	1	

PRIVATE HOME, LONDON

Oak floor treated with Bona White primer + Bona Traffic Natural

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines



**Bona**<sup>®</sup>



## Floor Care

Regular maintenance with the right products is essential to prolong the life of every wood floor whether it is finished with lacquer or oil.

Bona offers products for home owners and commercial maintenance teams to make cleaning straightforward and effective.

Technical and safety data sheets for all products are available for download at [bona.com](https://www.bona.com) or speak to a member of our technical team for more information.



Retail display units are available – speak to your local Bona representative.

**Bona**<sup>®</sup>



# Floor Care

Adhesives




Abrasives

Coatings

Floor Care

Sanding Machines




## Deep Clean System

	Type	Article Number	Pack Size	Packs/Box
	<b>Bona Power Scrubber</b> The Bona Power Scrubber is a compact, powerful scrubbing machine for cleaning lacquered and oiled wooden floors. When used with Bona Deep Clean Solution, it removes the toughest dirt and grime with ease. The two counter-rotating cylindrical brushes clean deeply, even on rough, brushed surfaces and on wood floors with bevelled edges. The rubber squeegees ensure an extremely effective water pickup which makes it safe to use on wood floors. Also suitable for cleaning tiled floors and outdoor decking.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>• Powerful and easy to manoeuvre</li> <li>• Extremely effective water pickup</li> <li>• Easy to fill, clean and transport</li> <li>• Indoor and outdoor use</li> </ul>	<b>Technical Data:</b> <b>Motor rating:</b> Max 2700 W, Avg. 1900 W <b>Power supply:</b> 220-240 V / 50 Hz <b>Machine weight:</b> 34.5 kg <b>Scrubbing brush:</b> 2 x 400 mm soft white nylon <b>Solution capacity:</b> 10 L <b>Recovery tank capacity:</b> 10 L <b>Dimensions:</b> 520 mm x 470 mm x 300 mm		
	<b>Roller Brush</b> White – For regular cleaning of oiled, lacquered or hard wax oiled floors. Orange – For profiled decking. Red – For intensive cleaning of oiled, lacquered and hard wax oiled floors.			
	White	AS3647622500	400 mm	1
	Orange	AS3647625250	400 mm	1
	Red	AS3647624580	400 mm	1
	<b>Deep Clean Solution</b> Concentrated cleaner for use with Bona Power Scrubber. Suitable for wood floors finished with oil or lacquer as well as outdoor decks. Perfect for degreasing the surface before application of polish.			
	<b>Key Benefits:</b> <ul style="list-style-type: none"> <li>• Revitalises dull, dirty floors</li> <li>• Dissolves deeply engrained dirt and stubborn scuff marks</li> <li>• Optimised for Bona Power Scrubber</li> </ul>	<b>Dilution:</b> Dilute with clean water <ul style="list-style-type: none"> <li>• Lacquered surfaces: 1:10</li> <li>• Oiled surfaces: 1:20</li> <li>• Outdoor decking: 1:5</li> </ul>		



# Floor Care

## Commercial Cleaners for Lacquered Floors

	Type	Article Number	Pack Size	Packs/Box
	<b>Bona Cleaner</b> New formulation for powerful, low-foaming cleaning of sealed wooden floors. For use with autoscrubber or conventional cleaning methods. A pH neutral detergent which leaves no residue. A concentrate which must be diluted before use. <b>Dilution:</b> 100 ml/10 L water			
		WM760013006	1 L	6
		WM760020001	5 L	3
	<b>Bona Polish</b> A polyurethane-enhanced formulation delivering an extremely durable surface, with a choice of Gloss or Matt finish, for sealed wooden floors. Floors which have been previously treated with polish must be sanded back to bare wood prior to applying a finish. <b>Coverage:</b> 50 m <sup>2</sup> /L <b>Drying Time:</b> (at 20°C/60%RH) at least 1 hr			
	Matt	WP500313001	1 L	6
	Matt	WP500320001	5 L	3
	Gloss	WP500313006	1 L	6
	Gloss	WP511020001	5 L	3
	<b>Bona Freshen Up</b> A ready to use waterborne polyurethane maintenance coating for most finished and pre-finished lacquered wood floors. Bona Freshen Up will revive a scratched and dull surface in addition to providing continued protection against wear. It meets DIN 18 032 for slip resistance. To be applied with the Bona Applicator Pad. <b>Coverage:</b> 30-50 m <sup>2</sup> /L Single coat application <b>Drying Time:</b> (at 20°C/60%RH) Approx. 2 hrs			
		WP595013106	1 L	6
		WP595020002	5 L	3





# Floor Care

Adhesives


Abrasives

Coatings


Floor Care


Sanding Machines


## Commercial Cleaners for Lacquered Floors

	Type	Article Number	Pack Size	Packs/Box
	Bona Commercial Mop Mop kit for commercial floors includes cleaning pad and dusting pad.			
		WM710013489	61cm (24in)	10
	Extra Cleaning Pad	AX0003544	61cm (24in)	12
	Extra Dusting Pad	AX0003543	61cm (24in)	12

## Commercial Cleaners for Oiled Floors

	Bona Wax Oil Bona Wax Oil is a blend of natural waxes designed for the periodic maintenance and cleaning of wood floors treated with either a UV-oil or Bona Hard Wax Oil. It may also be used to give the hard waxed surface a glossier appearance. Can also be used for spot repair.			
			<b>Drying Time:</b> (at 20°C/60% RH) Approximately 12 hrs <b>Tools:</b> Bona Wool Pad/Buffering Machine <b>Coverage:</b> 50-80 m <sup>2</sup> depending on wood species. Single coat application	
	Gloss	WP615013100	1 L	6

	Bona Oil Care A low VOC maintenance oil with excellent penetration properties. Designed for use on floors treated with Bona Craft Oils.			
			<b>Drying Time:</b> (at 20°C/60% RH) Approximately 2 hrs <b>Tools:</b> Bona Wool Pad/Buffering Machine <b>Coverage:</b> 50-100 m <sup>2</sup> depending on condition of floor. Single coat application	
	Neutral	GT525113100	1 L	6

	Bona Oil Soap A low pH cleaner for floors treated with Bona Craft Oils. Use diluted and allow one hour before buffing.			
			<b>Dilution:</b> 200 ml/10 L water	
		WM704013100	1 L	6
	WM704020100	5 L	3	



# Floor Care

## Retail Cleaning Products











	Type	Article Number	Pack Size	Packs/Box
 <p>    </p>				
		CA201010011	1	4
 <p>   </p>				
		CA202020011	1	4
 <p>   </p>				
		CA401010011	1	4
 <p>  </p>				
	Bona Wood Floor Cleaner	WM760341041	850 ml	6
	Bona Stone, Tile & Laminate Cleaner	WM760341051	850 ml	6
	Bona Oiled Floor Cleaner	WM700141031	850 ml	6
	Bona OxyPower Wood Floor Deep Cleaner Cartridge	WM857041041	850 ml	6

**Bona**<sup>®</sup>



# Floor Care

## Retail Cleaning Products

	Type	Article Number	Pack Size	Packs/Box
 		WM740119011	4 L	3
<p><b>Bona Wood Floor Cleaner Refill Pack</b> 4 litre refill pack of Wood Floor Cleaner. Ready to use non-streak formulation. Ideal for topping up 1 litre spray packs or Spray Mop cartridges.</p>				
 		WM740219021	4 L	3
<p><b>Bona Stone, Tile &amp; Laminate Cleaner Refill Pack</b> 4 litre refill pack of Stone, Tile &amp; Laminate Cleaner. Ready to use non-streak formulation. Ideal for topping up 1 litre spray packs or Spray Mop cartridges.</p>				
 		WM700115021	2.5 L	4
<p><b>Bona Oiled Floor Cleaner Refill Pack</b> A special cleaner for use on wood floors treated with oil. Cleans and nourishes the surface and increases protection. Ideal for topping up 1 litre spray packs or Spray Mop cartridges.</p>				
 		WM857015001	2.5 L	4
<p><b>Bona OxyPower Wood Floor Deep Cleaner Refill Pack</b> Powerful cleaning action powered by hydrogen peroxide, designed to remove heavy dirt build up from all types of wood floors.</p>				
 		WM857015011	2.5 L	4
<p><b>Bona OxyPower Hard Surface Floor Deep Cleaner Refill Pack</b> Powerful cleaning action powered by hydrogen peroxide, designed to remove heavy dirt build up from all types of hard surface floors such as vinyl, LVT, tile, laminate etc</p>				

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines



# Floor Care

## Retail Cleaning Products

	Type	Article Number	Pack Size	Packs/Box
 <p>99% PROVEN TO REMOVE GREASE BEST IN TEST GREENGUARD</p>	Bona Wood Floor Cleaning Kit			
		CA101018011	1	6
 <p>99% PROVEN TO REMOVE GREASE GREENGUARD</p>	Bona Stone, Tile & Laminate Cleaning Kit			
		CA101019021	1	6
	Bona Premium Microfiber Mop			
		CA101065	1	6
 <p>GREENGUARD</p>	Bona Floor Cleaner Spray			
	1 litre spray packs of Bona floor cleaners.			
	Bona Wood Floor Cleaner Spray	WM740113011	1 L	6
	Bona Stone, Tile & Laminate Cleaner Spray	WM740213021	1 L	6
	Bona Cleaner for Oiled Floors Spray	WM700113001	1 L	6
	Bona OxyPower Wood Floor Deep Cleaner Spray	WM857013001	1 L	6
	Bona OxyPower Hard Surface Floor Deep Cleaner Spray	WM857013011	1 L	6

## A PERFECT PARTNERSHIP

The Bona Premium Spray Mop is the smart, simple and effective solution to clean and maintain flooring. Recommended by professionals, the Bona Wood Floor Cleaner and the Bona Premium Microfiber Spray Mop are the perfect partnership.



Adhesives

Abrasives

Coatings

Floor Care








Sanding Machines

**Bona**<sup>®</sup>



# Floor Care

## Retail Cleaning Products

	Type	Article Number	Pack Size	Packs/Box
 	<b>Bona Wood Floor Refresher</b> A specially formulated, ready to use, waterborne maintenance coating for lacquered floors which are dull, scratched or show signs of wear. Bona Wood Floor Refresher restores the sheen and beauty of wood floors, making old floors look like new. To be applied using the Bona Applicator Pad. <b>Coverage:</b> 30-50 m <sup>2</sup> /L			
		WP595013010	1 L	6
 	<b>Bona Wood Floor Polish</b> A ready to use waterborne coating to restore shine (Gloss version), preserve matt look (Matt version) and protect against wear. Not to be used on waxed or oiled floors. <b>Coverage:</b> 30-50 m <sup>2</sup> /L			
	Gloss	WP511013011	1 L	6
	Matt	WP500313011	1 L	6
 	<b>Bona Stone, Tile &amp; Laminate Polish</b> A ready to use maintenance coating for hard floors. Provides a new shine plus extended protection and resistance to wear. <b>Coverage:</b> 50 m <sup>2</sup> /L			
		WP511013021	1 L	6
	<b>Bona Polish Remover</b> Removes build up from polish and other maintenance products. Suitable for water resistant surfaces such as varnished wood, tiles, PVC and linoleum. Dilute before use. <b>Dilution:</b> 1 L/5 L water			
		WM634013001	1 L	6



# Floor Care

Adhesives







Abrasives


Coatings

Floor Care

Sanding Machines

## Retail Cleaning Products

	Type	Article Number	Pack Size	Packs/Box
 		Bona Oiled Wood Floor Refresher		
<p>Bona Oiled Wood Floor Refresher makes the maintenance of oiled wood floors easy. Simply pour onto surface, distribute, and let dry. The product requires no machine buffing and the floor is ready for light foot traffic in as little as 1-2 hours after application.</p> <p><b>Coverage:</b> 40-60 m<sup>2</sup>/L</p>				
		WP605013010	1 L	6
		Bona Cleaning Pad		
<p>Bona Cleaning Pad is a washable microfibre pad that attaches with Velcro-like strips to the Bona Mop and can be washed up to 500 times. (Do not use fabric conditioner when washing.)</p>				
	Blue	CA101020	1	8
		Bona Dusting Pad		
<p>Bona Dusting Pad is a fluffy washable microfibre pad. Easily attached to the Bona Mop with Velcro-like strips this dusting pad is an excellent way of picking up dust and pet hair before cleaning your floors. (Do not use fabric conditioner when washing.)</p>				
	Grey	CA101021	1	8
		Bona Applicator Pad		
<p>Bona Applicator Pad is designed for the application of Bona Wood Polishes and Refreshers. Washable and reusable and attaches to the Bona Mop with Velcro-like strips. (Do not use fabric conditioner when washing.)</p>				
	Beige	CA101025	1	8
		Bona Deep Clean Pad		
<p>Bona Deep Clean Pad uses PowerLoop® technology to lift and remove heavy dirt build-up. For the best results, use with Bona OxyPower Wood Floor Deep Cleaner or Bona OxyPower Hard-Surface Floor Deep Cleaner.</p>				
	Blue/Green	CA101059	1	8

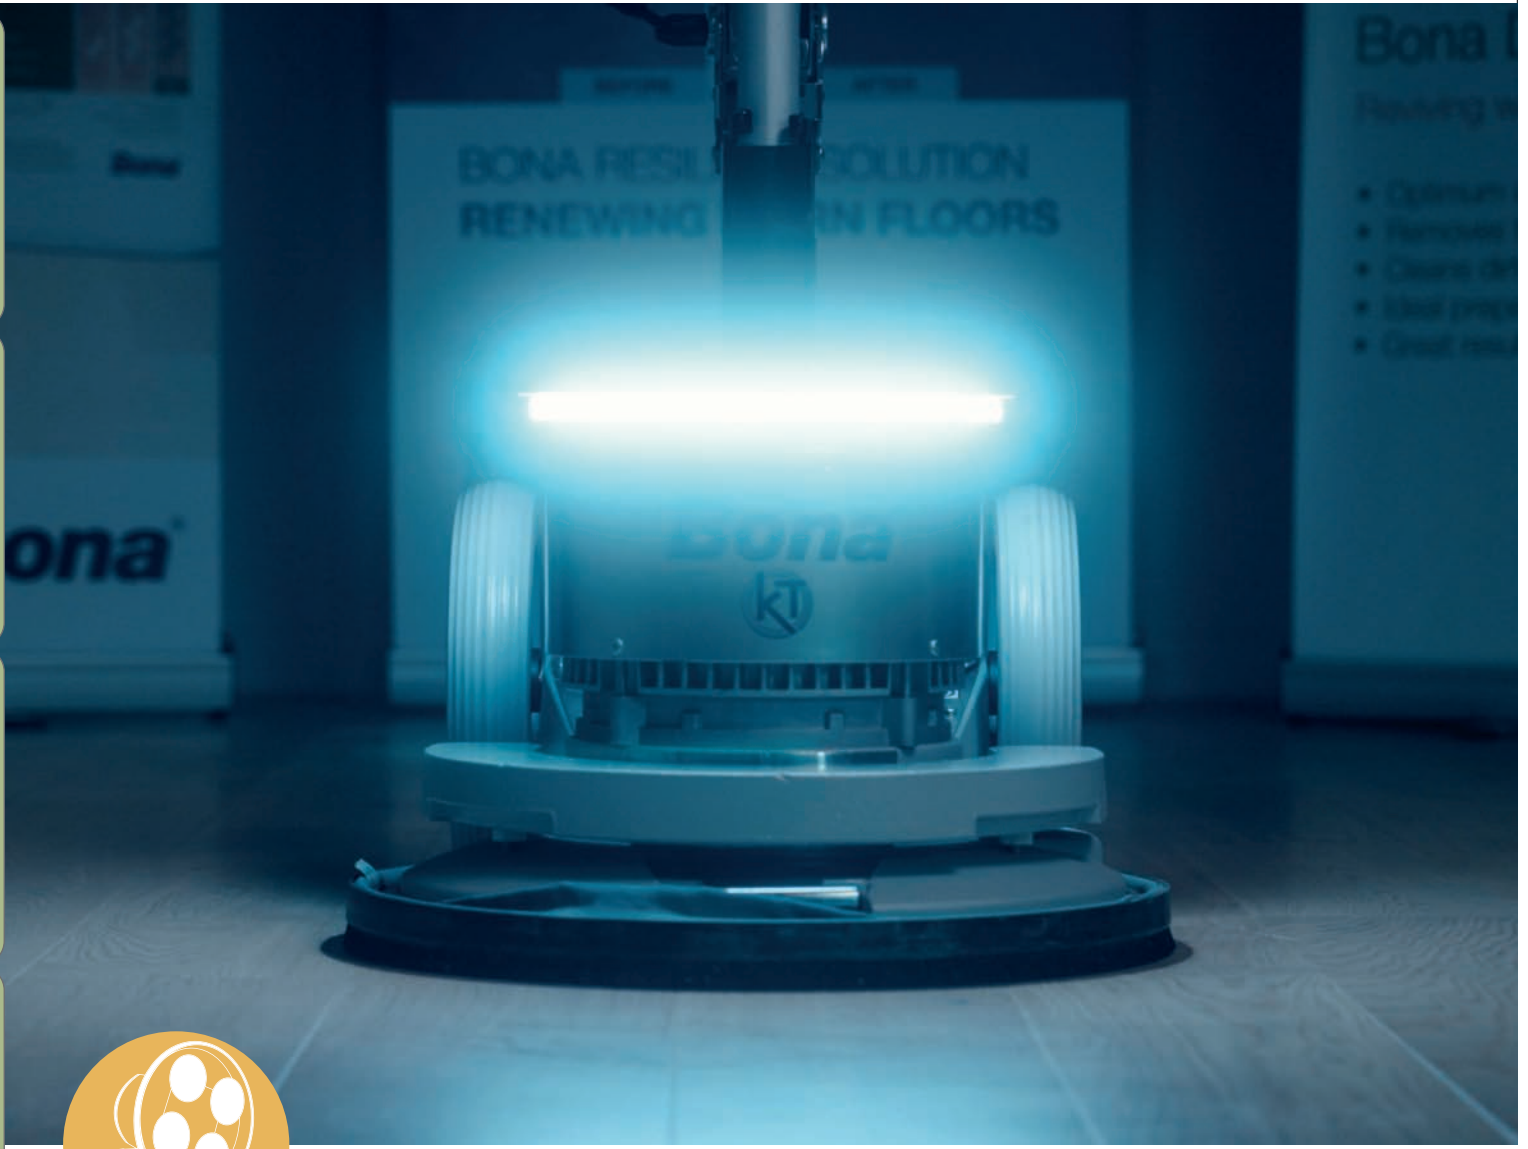

# Sanding Machines

Bona's sanding machines offer exceptional results and are designed for maximum efficiency, ergonomics and safety.

Whether you are looking for solutions to coarse sanding, fine sanding, edge sanding or dust-free sanding, Bona has state-of-the-art solutions for every situation.





# Sanding Machines

## Belt Sanders

Bona Belt Original 



A compact design makes the Bona Belt simple to manoeuvre and the specially designed transport cart makes it easy to move between jobs. Powerful and effective, with two optional drum widths (200 and 250mm), this is a highly versatile machine that's easy to take apart and reassemble. The easy-start function ensures reliable start-up under all conditions and the large front and side covers make for easy access to the drum and tension roller. The efficient vacuum minimises dust but for optimal dust reduction, use in conjunction with a Bona DCS dust containment system.

### Key Benefits:

- Compact Design
- Soft start motor
- Easy to disassemble and re-assemble
- Ergonomic feather handle for raising and lowering drum
- Optional transport cart and drum weight
- 250mm drum size for fastest possible sanding

### Technical Data:

**Easy start:** Enables 1-push start on a 10 A fuse  
**Motor power:** 2.2 KW  
**Weight:** 74 kg  
**Dust discharge:** < 2 mg / m<sup>3</sup> air  
**Drum width:** 250mm  
**Sanding Belt size:** 250 x 750mm  
**Drum speed:** 1750 RPM

250 x 750 mm	AM0110000.3	2.2 kW	230 V / 50 Hz
--------------	-------------	--------	---------------

Bona Belt Lite 



A lightweight yet powerful and well balanced machine which can be easily broken down into three parts and quickly reassembled.

### Key Benefits:

- Superb manoeuvrability
- Light 60 kg weight
- Up to 50% weight can be applied to the drum
- Easy, tool-free fitting of abrasives

### Technical Data:

**Drum width:** 200 mm  
**Sanding belt size:** 200 x 750 mm  
**Total weight:** 60 kg  
**Drum revolutions:** 2400 rpm

200 mm	AMK175000	2.2 kW	230 V / 50 Hz
--------	-----------	--------	---------------

Bona Belt UX 2.2 



A genuine user-experience based design, the Bona Belt UX was developed following extensive feedback from flooring contractors. The result is an easy to control, highly manoeuvrable machine that delivers precise and efficient sanding. Low vibration combines with high performance to deliver a smoother surface with no chatter marks.

### Key Benefits:

- Smooth and controlled lowering of the drum
- Optimum results when coarse sanding all types of wood flooring
- Compatible with all versions of Bona DCS for dust free sanding

### Technical Data:

**Motor Power:** 2.2 KW  
**Weight:** 85kg  
**Drum Width:** 200mm  
**Sanding Belt Size:** 200 x 750mm  
**Drum speed:** 1800-2050 RPM

200 x 750 mm	AMK173100	2.2 kW	230 V / 50 Hz
--------------	-----------	--------	---------------

## Expansion Sanders

Bona Scorpion 



An expanding drum machine designed for professional or DIY use. A unique 'dead-man' handle device ensures safe operation.

### Key Benefits:

- Compact design
- Weighs just 45 kg
- 'Dead-man' safety feature
- Easy, tool-free fitting of abrasives
- Easy pressure adjustment
- Suitable for use with distressing drum to texture wood floors on site

### Technical Data:

**Drum width:** 200 mm  
**Sanding belt size:** 200 x 480 mm  
**Total weight:** 45 kg  
**Drum revolutions:** 3000 rpm

200 mm	AMK180000	1.5 kW	230 V / 50 Hz
--------	-----------	--------	---------------



# Sanding Machines

Edge Sanders	Type	Article number	Power	Volt / Hertz	
<p>Bona Edge UX <small>by KÜNZLE &amp; TASIN</small></p>  <p>The new Bona Edge UX has been designed to optimise user experience and deliver a great performance. The innovative arm design lets you sand closer to walls and corners. The three handles offer flexible driving positions for greater comfort and the position of the disc within the chassis means both 130mm and 220mm versions handle like a dream and minimise risk of chatter marks. Bona Edge UX is compatible with all versions of Bona DCS for dust-free sanding.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Low 92 dB engine noise level</li> <li>• 16 LED lights for optimum visibility</li> <li>• Use with holed or Velcro-back discs</li> <li>• Dead man's handle safety feature</li> </ul> <p><b>Technical Data:</b></p> <p><b>Motor Power:</b> 230V-50Hz-1.25KW  <b>Sanding Arm Length:</b> 130 mm and 220 mm  <b>Sanding Arm Height:</b> 58 mm  <b>Weight 130 mm arm:</b> 14.4 kg  <b>Weight 220 mm arm:</b> 15.4 kg  <b>Noise Level:</b> 92 dB  <b>Light:</b> LED Strip  <b>Disc Size:</b> 178 mm  <b>Disc Speed:</b> 3000 rpm</p>	220 mm	AMO230500	1.25 kW	230 V / 50 Hz	
	130 mm	AMO230600	1.25 kW	230 V / 50 Hz	
<p>Bona CombiEdge <small>by KÜNZLE &amp; TASIN</small></p>  <p>The Bona CombiEdge is a lightweight and flexible edge sander. Available as either a 125 mm short arm machine or a 330 mm long arm machine. The 330 mm arm provides excellent reach under cupboards and radiators. The lightweight and highly efficient edge-sanding machine is also fitted with a front LED light for better visibility.</p> <p>Also available as the Bona CombiEdge Package with both short and long arms supplied.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Easily switchable arm</li> <li>• Very manoeuvrable</li> <li>• Lightweight</li> <li>• Efficient vacuuming</li> <li>• Safety operating switch on the handle</li> </ul> <p><b>Technical Data:</b></p> <p><b>Discs diameter:</b> 150 mm  <b>Total weight:</b> Short arm 7.5 kg  Long arm 8.3 kg  <b>Length sanding arm:</b> 125 mm/330 mm  <b>Disc speed:</b> 3300 rpm</p>	Bona CombiEdge Short	125 mm	AMK280100	1.15 kW	230 V / 50 Hz
<p>Bona CombiEdge Box Package <small>by KÜNZLE &amp; TASIN</small></p>  <p>The CombiEdge Box Package includes a 125mm &amp; 330mm long and short arm attachment for the CombiEdge. Supplied in a specialist plastic carry case with a trolley and rubber wheels for easy transportation. Foam inlay is designed to house the machine in a standing position with long arm on the side. Can accommodate both Combi Edge Short and the long arm while still allowing space to include any abrasive boxes, extension cables and any other tools needed.</p>	Bona CombiEdge Box Package	125 & 330 mm	AMK282101	1.15 kW	230 V / 50 Hz



# Sanding Machines

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

## Bona FlexiSand System

Type

Article number

Power

Volt / Hertz

### Bona FlexiSand 1.9



Powerful and versatile buffer for all flooring needs, from bare wood sanding to concrete grinding.

The Bona FlexiSand 1.9 is the core of a flexible and powerful system with tools and accessories to handle any kind of renovation challenge, from sanding down to the bare wood, fine abrading, sanding resilient surfaces, to concrete grinding.

The smart, compact design makes it both capable and easy to handle. Upgraded with user-friendly features like surrounding ambient LED lights, a kickstand to avoid pressure on discs, a magnetic click-on weight and a backlit multimeter with better power supply information.

#### Key Benefits:

- Easy to transport
- Versatile usability
- Ergonomic and convenient handling
- Connects with the Bona DCS for dust-free sanding
- Complete range of accessories

#### Technical Data:

- Single disc:** 407 mm
- Power drive disc:** 150 mm
- Total weight:** 50 kg
- Abrasive disc speed (unloaded):** 147 rpm

FlexiSand 1.9

407 mm

AMO310003

1.9 kW

230 V / 50 Hz

### SAINT OSYTH PARISH CHURCH

Bona Classic UX Prime and Traffic HD Silk Matt

**Bona**<sup>®</sup>



# Sanding Machines

Bona FlexiSand Accessories	Type	Article number	Power	Volt / Hertz
Magnetic weight – available to retrofit	11 kg	ASK3199940015		
360 LED light – available to retrofit		ASK3199944000		
Multimeter				
Kickstand – available to retrofit		ASK3199940061		



### Magnetic weight

Magnetic weight for simpler handling



### LED Light

360° full clarity of work area



### Multimeter


Multimeter with a blue back-lit screen



### Kickstand

Protect your Bona Flexistand

Items available to purchase and retrofit to previous FlexiSand 1.9 model



### Bona Intermediate Pad

Pressure-equalising foam insulation. Helps the sanding disc contour to the surface. Attach to Bona MultiDisc before attaching Diamond Abrasives.

#### Key Benefits:

- Reduces sanding pressure

125 mm	AAS472100008		3
150 mm	AAS472200008		4



### PRIVATE HOME CORNWALL

Bona 2k Craft Oil, Misty and Traffic HD Extra Matt



# Sanding Machines










Adhesives

Abrasives

Coatings


Floor Care

Sanding Machines

Bona FlexiSand System	Type	Article Number	Pack Size	Packs/Box
<p>Bona Quattro Disc</p>  <p>Four-plate disc for an excellent surface finish. Perfect for reducing and smoothing out drum marks and rotational scratches from edger machines. The Bona Quattro Disc will optimise your sanding results and is perfectly balanced for high efficiency combined with smooth end results.</p>	150 mm	ASO312530	1	1
<p>Bona Concrete Disc</p>  <p>Basic drive plate for fitting different types of sanding segments. Magnetic fixing for quick and easy change of segments.</p>	407 mm	ASO312570	1	1
<p>Diamond Segment</p>  <p>For the removal of sinter and laitance layers and the preparation of concrete surfaces.</p>		ASO312571	Set of 4	1
<p>PCD Split Segment</p>  <p>For the removal of polyurethane, thin adhesive residues or paint.</p>		ASO312582	Set of 4	1
<p>PCD Maxi Segment</p>  <p>For the removal of thick adhesive residues, bitumen, epoxy and carpet foam.</p>		ASO312581	Set of 4	1
<p>Diamond Sanding Plates</p>  <p>Diamond metal plate for efficient removal of hard lacquers and adhesive residues on wood floors. The 150 mm discs are designed to be used with the Bona FlexiSand 1.9 equipped with a PowerDrive Connect or PowerDrive. It can also be fitted on handheld machines such as Bona SupraFlex. Available in 30, 50 &amp; 70 grit. 50 grit is the standard specification for particularly stubborn lacquer removal.</p>	150 mm	AS16001030	1	1
<p>Bona Tampico Brush</p>  <p>A 16" soft-bristle brushing attachment for the Bona FlexiSand DCS Buffer or Bona Power Drive, to thoroughly clean the wood grain after the final sanding and screening and before staining or sealing. Helps remove the fine dust from the soft grain of wood prior to sealing, staining, or oiling. In addition, it's an excellent tool post-wire-brushing to achieve a cleaner, more textured appearance.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Soft bristles thoroughly remove fine dust from the grain of the wood after sanding</li> <li>• Greatly reduces grain raise and provides a much smoother finish</li> <li>• Fits a standard 16" buffer or Bona Power Drive</li> </ul>	16"	ASK3100030716		1
<p>Bona Box</p>  <p>Convenient, hard plastic container for storing Bona FlexiSand accessories such as drive plates and sanding discs securely.</p>	L	AST237	1	1
	XL	AST437	1	1
<p>Bona Box Trolley</p>  <p>Trolley with large wheels for easy transportation of Bona Boxes.</p>		AST999	1	1



# Sanding Machines

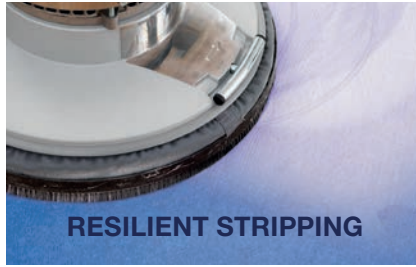

## FLOOR RENOVATION WITH **ENDLESS POSSIBILITIES**

The Bona FlexiSand offers endless renovation possibilities. The versatile machine will deliver in various situations and on multiple floor types. Regardless of whether your project involves wood, resilient, or concrete floors, Bona FlexiSand makes it happen. In combination with the wide range of powerful tools, the possible application areas are numerous.

Bare wood sanding, wire brushing, application and buffing of oil, mid- and fine-sanding, resilient stripping, adhesive and residue removal, and concrete grinding are just a few examples of what can be delivered by one single machine. It is certainly a valuable companion for contractors facing different flooring challenges.

### ERGONOMY IN FOCUS

When developing and improving the Bona FlexiSand, an ergonomic machine experience for contractors is the main priority. We believe that powerful performance can and should be equal to a machine designed specifically for a beneficial work environment. Below are a few examples to illustrate this:



Bona FlexiSand 1.9 is optimised for dust-free sanding and works perfectly with Bona DCS 50 and DCS 70.



Position free, tiltable handle for optimal manoeuvrability.



Possible to use for upright, ergonomic edge sanding.




Large wheels to ensure easy transportation.



New LED light improves visibility.

**Bona®**

Make oiled floors even more beautiful  
– using Bona Brush Technology!

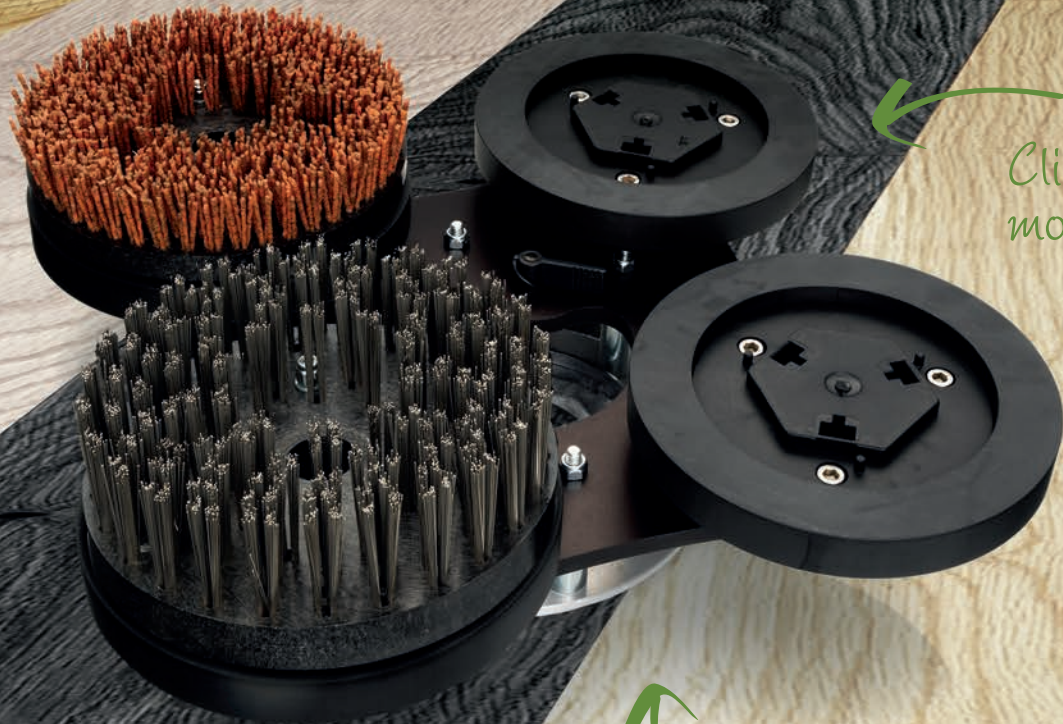

- Brushed character
- 2-dimensional effects
- Creating texture

*For FlexiSand 1.9*

## Introducing Bona Brush Technology

Bona's unique Brush Technology features the innovative Bona PowerDrive Connect click-on mount to produce dramatic new looks on existing wood floors or to abrade and sand down to bare wood for a full renovation.

From two-tone contrasts, to eye-catching, contemporary 2 colour effects, when combined with Bona's range of oils and finishes, the possibilities are endless.

### Creating texture

Bona Brush Technology brushes down deep between the grain. This enhances the texture of the wood, creating floor effects with a difference.

The system works on planks and on parquet blocks.

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

**Bona**<sup>®</sup>



# Sanding Machines


## How it works

Bona's new Brush Technology involves wire brush attachments that remove the soft wood between the hard wood, adding depth and texture to the wood's surface.

This allows the coloured oil to settle between the grain, creating a 2-dimensional effect and enhancing the natural pattern of the wood.




Follow Bona's recommended abrading and brushing sequence for optimal results.

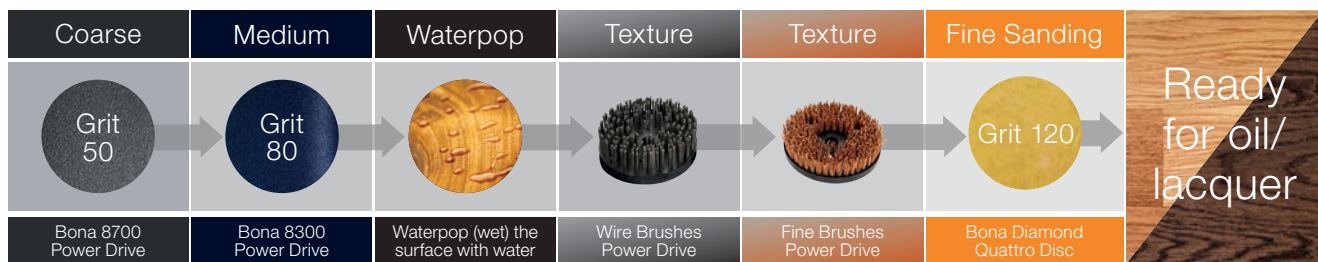

## Stunning unique effects

### Bringing out the grain

Counter-rotating cylindrical wire heads brush away the soft wood, creating ridges between the wood's grain to expose the natural pattern. This creates depth and texture.

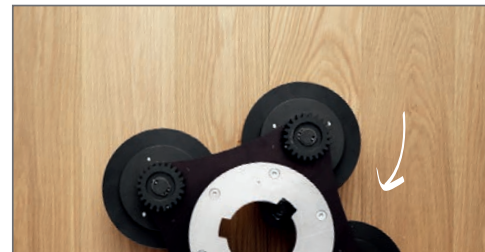

Cylindrical wire heads brush away soft wood

### Simple attachment

Brushes and sanding discs are mounted onto the Bona PowerDrive Connect, locked into place with just an easy click.



Click-on mount with strong hexagon fitting

### PowerDrive Connect for flexibility

Bona PowerDrive Connect gives you the unique flexibility to perform brushing, traditional abrading or bare wood sanding by simply switching the attachments. All these in just one driving plate solution.

### Bona FlexiSand 1.9

For easy, direction-free brushing and sanding, the Bona PowerDrive Connect is to be used together with Bona FlexiSand 1.9. With its powerful 1.9 kW motor it delivers superb results.

### Bona SupraFlex

Use the Bona SupraFlex edge tool for brushing and sanding right up to the edge and for other hard to reach areas.



Dynamic cog system for sanding power

**Bona**<sup>®</sup>





# Sanding Machines





Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

Other Machines & Accessories	Type	Article number	Power/Pack Size	Volt/Hertz/ Packs per Box
<p>Bona Mini Buffer</p>  <p>The Bona Mini Buffer is a single-speed buffing machine for buffing wooden floors and easier fine sanding of lacquered surfaces. Smooth running, features an anti-vibration system for ease of use.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Compact and lightweight</li> <li>• Extremely easy to use</li> <li>• Perfect for the maintenance of all hard floors</li> </ul> <p><b>Technical Data:</b></p> <p><b>Optimal pad size:</b> 330 mm  <b>Disc speed:</b> 1450 rpm  <b>Weight:</b> 13 kg</p>	300 mm	AMC718010	290 W	230 V / 50 Hz
<p>Bona SupraFlex</p>  <p>Bona SupraFlex is an all-in-one sanding machine for the sanding and brushing of edges. The perfect sanding companion to the Bona Power Drive NEB, Bona SupraFlex will help you with those hard to reach areas.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Powerful 1400 W motor</li> <li>• Stepless speed selection (600-2100 rpm)</li> <li>• Low height – easy to reach under stairs and radiators etc</li> <li>• Dust cover allows connection to Bona DCS for dust free sanding</li> <li>• Easy to change between sanding disc and brushes</li> <li>• Low noise</li> </ul>	155 mm	AMF100000	1.4 kW	230 V / 50 Hz
<p>Cup Brush 120</p>  <p>Metal brush for use with Bona SupraFlex.</p>	120 mm	ASF100200	1	1
<p>Bona Orbital</p>  <p>Lightweight sander for precision sanding.</p> <p>The Bona Orbital is a precision sander particularly suitable for mid and fine sanding. Its compact dimensions and the low weight makes the machine easy to handle and allows you to work longer periods of time without getting tired. The Powerful brushless EC motor is characterized by low noise, high efficiency, and low maintenance, resulting in a smoother and quieter sanding experience than typical sanders.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Efficient and low-noise sanding</li> <li>• Easy to operate</li> <li>• Gentle for your hand and arm</li> <li>• Ergonomic one-handed grip</li> <li>• Smart and handy carrying box</li> </ul> <p><b>Technical Data:</b></p> <p><b>Weight:</b> 1.15 kg  <b>Disc size:</b> 150mm  <b>Voltage:</b> 230 V</p>	155 mm	AMF100001	1.4 kW	230 V / 50 Hz



# Sanding Machines

Vacuum Systems	Type	Article number	Power	Volt / Hertz
<p>Bona FlexiVacuum</p>  <p>Bona FlexiVacuum is an on-board vacuum especially designed to be used in combination with the Bona FlexiSand.</p> <p>Bona FlexiVacuum is a part of Bona's dust-free sanding offer, for an improved working and living environment. It is classified Class M according to EN 60 335-2-69, ensuring that 99,9% of dust particles are removed by the filters.</p> <p><b>Key Benefit:</b></p> <ul style="list-style-type: none"> <li>• Large capacity</li> <li>• Healthier working conditions - M Classified, health hazardous dust EN 60335-2-69</li> <li>• Electrical power outlet</li> <li>• LED- alarm light in case of too low air flow</li> </ul> <p><b>Technical Data:</b></p> <p><b>Collection capacity (bag):</b> approx.10litres wood dust</p> <p><b>Air flow:</b> 171 m<sup>3</sup>/hour</p> <p><b>Filter:</b> Polyester filter cartridge Class M</p> <p><b>Hose aperture:</b> 35 mm diameter</p>		ASK3199940901	800 W	230 V / 50 Hz
<p>Bona DCS 70</p>  <p>The Bona DCS 70 is a powerful vacuum unit for dust-free sanding. Its two-step cyclonic separation and unique filter design effectively contains dust within the machine, even changing the dust bag can be done completely dust-free. With the DCS 70 connected to the sanding machine there is no need to seal off connecting rooms or cover paintings and bookshelves and the environment will be a lot healthier and cleaner to work in compared to using regular dust bags on the sanding machine.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Dust-free sanding</li> <li>• Ergonomic design and convenient transportation</li> <li>• Low power consumption</li> <li>• Quick and dust free swap of dust bags</li> <li>• Unique seamless dust bag solution using Longopac</li> </ul> <p><b>Technical Data:</b></p> <p><b>Weight:</b> 38 kg</p> <p><b>Dimensions:</b> 800 × 600 × 1200 mm</p> <p><b>Dust holding capacity:</b> 70 L</p> <p><b>Airflow with 7.5 m hose:</b> 250 m<sup>3</sup> per hour</p> <p><b>Coarse filter:</b> Conical folded polyester filter, 1 m<sup>3</sup></p> <p><b>Fine filter:</b> class H 13 (99.996%, 0.3 μM), 0.66 m<sup>3</sup></p> <p><b>Hose aperture:</b> 35 mm diameter</p> <p><b>Hose length:</b> 7.5 m including connection adapters</p>		AMO530005	1400 W	230 V / 50 Hz
<p>Bona DCS 25</p>  <p>A compact and portable vacuum unit for dust-free sanding. Offering all the benefits of the larger Bona DCS 70, the Bona DCS 25 is compatible with all Bona sanding machines.</p> <p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Compact and portable</li> <li>• Class H 13 HEPA filtration</li> <li>• Filter cleaning during operation</li> <li>• Electrical outlet with automatic start/stop</li> <li>• Beeper alarm in case of too low air flow</li> <li>• Soft start motor</li> </ul> <p><b>Technical Data:</b></p> <p><b>Weight:</b> 20kg</p> <p><b>Dimensions:</b> 550 x 500 x 1070</p> <p><b>Dust holding capacity (bag):</b> Approx.16 litres wood dust</p> <p><b>Motor:</b>1450W, 230V, 6A</p> <p><b>Air flow:</b> 194cubic metres per hour</p> <p><b>Pre-filter:</b> Teflon coated membrane filter</p> <p><b>HEPAfilter:</b> Class H 13 (99.996%, 0.3μm), 1.1sq.m</p> <p><b>Hose aperture:</b> 35 mm diameter</p> <p><b>Length of hose:</b> 7.5 m</p>		AMO540000	1450 W	230 V / 6 A



# Sanding Machines


Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

Vacuum Systems	Type	Article number	Power	Volt / Hertz
<p>Bona DCS 50</p> 				
<p>The DCS 50 is a powerful and versatile industrial vacuum cleaner developed to handle both very fine and health hazardous dust that is possible to convert to a wet vacuum in a minute. The Bona DCS 50 is an excellent companion whether you are sanding wood floors or renovating resilient flooring. Equipped with a 2-step automatic filter cleaning which ensures sustained high suction power. Large wheels for good maneuverability and foldable handle for easy transportation.</p>				
<p><b>Key Benefits:</b></p> <ul style="list-style-type: none"> <li>• Certified filtration efficiency of 99.9% (M Class)</li> <li>• High capacity for dust collection 50L</li> <li>• Automatic filter clean option</li> <li>• Compact design for convenience</li> <li>• Can be used as a wet vacuum</li> <li>• Automatic 'stop-start' electrical outlet for powering machines</li> </ul>				
<p><b>Technical Data:</b></p> <p><b>Weight:</b> 19kg  <b>Dimensions:</b> 640 x 370 x 1045mm  <b>Dust holding capacity :</b> 50 L  <b>Hose aperture:</b> 35mm in diameter  <b>Hose length:</b> 5m</p>				
		AM11484430	1380 W	230 V / 50 Hz

Dust Bags	Article No.	Units/Box
Fleece Dust Bag for Bona DCS 50	AS3628893540	Pack of 5
Fleece Dust Bags for Bona DCS 25	ASO540001	Pack of 10
LongoPac Dust Bags for Bona DCS 70	ASO539500	Pack of 4
Cloth Bag – edgers	ASO992002	1
Cloth Bag – belt sanders (no zip)	ASO991000	1
Disposable Fleece Bag 700 x 350mm	ASO991012	1
Disposable Fleece Bag 600 x 300mm	ASO992012	1
S20 Dust Bag	ASC020430	Pack of 10
FlexiVac Dust Bags	ASO994011	Pack of 5

# Accessories

## Bona Branded Clothing

	Type	Article Number	Size	Packs/Box
Bona Branded Polo Shirt				
	Navy Blue Organic Cotton	AT3510000S	S	1
	Navy Blue Organic Cotton	AT3510000M	M	1
	Navy Blue Organic Cotton	AT3510000L	L	1
	Navy Blue Organic Cotton	AT351000XL	XL	1
	Navy Blue Organic Cotton	AT351002XL	2XL	1

## Bona Work Trousers

	Dark Grey MASCOT Stretch	AT31118C46	32" Waist	1
	Dark Grey MASCOT Stretch	AT31118C48	33" Waist	1
	Dark Grey MASCOT Stretch	AT31118C50	34" Waist	1
	Dark Grey MASCOT Stretch	AT31118C52	36" Waist	1
	Dark Grey MASCOT Stretch	AT31118C54	38" Waist	1



**Bona®**



## Sanding Machines

# Machine Registration

Get one year extra warranty



### REGISTER YOUR MACHINE TODAY

We understand that your sanding machine is vital to your business. That's why we're excited to offer you an opportunity to register your Bona machine and receive one additional year of warranty on top of the existing two-year warranty when you buy your machine.

### SPEAK TO YOUR SALES TEAM FOR MORE INFORMATION



**SCAN TO  
LEARN  
MORE**





Before



After



Before



After

## RETHINK RESILIENT FLOOR REPLACEMENT

### Bona Resilient Solution

#### RENEWING WORN FLOORS

Can you have a new floor that is safe and sound without replacing it? Yes, with the innovative Bona Resilient Solution, there is a complete, long lasting, effective system to restore, renew and upgrade resilient floors. The process could be repeated over and over again - throughout the floor's lifetime.

Hallways, entryways and gym floors are just a few of the many areas under the watchful eye of facilities teams. In addition to keeping these areas safe, they want to offer an inviting and attractive welcome. From vinyl, PVC, linoleum to rubber, Bona's unique, safe, and sustainable recoating treatment provides the perfect surface in a matter of hours. Even striking makeovers and colour changes can be achieved easily, with outstanding results.

WE CALL IT BONA RESILIENT SOLUTIONS, YOU COULD CALL IT A **BRAND-NEW FLOOR.**



**Bona**<sup>®</sup>

# RETHINK RESILIENT FLOOR REPLACEMENT



## BONA RESILIENT SOLUTION – RENEWING WORN FLOORS

An innovative and highly effective solution that transforms and extends the life of resilient floors. This high-quality, sustainable solution allows you to not just maintain a floor's freshness, but also to totally transform its look, without replacing it. Even in heavy traffic areas, surfaces are sealed for extra durability and long-term

protection. All achieved in 50% less downtime than replacing a resilient floor. And now floor owners can rest assured knowing that the Bona Resilient Solution provides a solid warranty that guarantees it against utmost wear and tear.



### TIME AND MONEY SAVINGS

Replacing a floor involves ripping up the old floor, sanding and leveling the subfloor, plus installation of a new floor, which all together is very time consuming. The Bona Resilient Solution can be performed in as little as a few hours which means no need to close the commercial space resulting in convenience and better profitability.

### IMPROVED HYGIENE FOR HEALTHIER SURFACES

Bona's unique process along with our coatings creates a monolithic surface that seals against microorganisms thus resulting in a floor with the highest level of hygiene standards as mandated by The Technical Rules of Biological Agents (TRBA).

### UNSURPASSED DURABILITY


Heavy traffic is a given in commercial settings and the Bona Resilient Solution does not disappoint. Compared to the industry average, Bona Pure and Bona Pure HD stand out in terms of both wear and chemical resistance.

### WEAR RESISTANCE



### SUSTAINABILITY FOR A BETTER WORLD

In a study conducted by the IVL Swedish Environmental Research Institute, they found that renovating with the Bona Resilient Solution rather than replacing a resilient floor results in 90% savings in both energy and reduced carbon footprint.

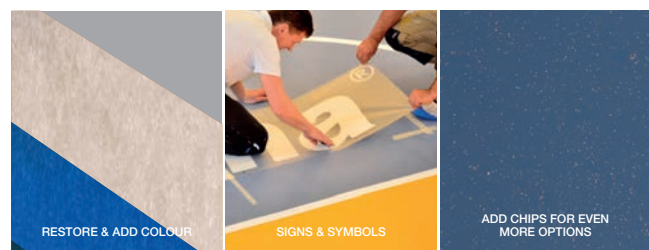

### DESIGN CUSTOMIZATION

The Bona Resilient Solution offers numerous design options from changing the colour and design of a floor, to adding decals, graphics and logos. The possibilities are endless.

Adhesives

Abrasives

Coatings

Floor Care

Sanding Machines

## Passion for floors

Established in 1919, Bona is a world leading innovator with a passion for the development of unique systems to treat wood and other hard floors.

Through our subsidiaries and distributors we have a local presence in more than 90 countries, enabling us to work closely with floor owners as well as the professionals who use our products.

Bona Limited  
8 Thornton Chase  
Linford Wood  
MILTON KEYNES  
Buckinghamshire  
MK14 6FD  
Tel 01908 525 150  
Fax 01908 311 677  
info.uk@bona.com

What 3 words //unsettled.boss.headless

Email address for orders only: [ukorders@bona.com](mailto:ukorders@bona.com)



[bona.com](http://bona.com)

From July 2024

**Bona**<sup>®</sup>